WEST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Grinding
Back of N. Abut	248+41.50	-18.00	690.46	690.48
A	248+51.50	-18.00	690.34	690.36
B	248+61.50	-18.00	690.22	690.24
End of N. Appr.	248+71.50	-18.00	690.10	690.12

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Grinding
Back of N. Abut	248+41.50	-12.00	690.58	690.60
A	248+51.50	-12.00	690.46	690.48
B	248+61.50	-12.00	690.34	690.36
End of N. Appr.	248+71.50	-12.00	690.22	690.24

℄ ROADWAY AND PGL

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Grinding
Back of N. Abut	248+41.50	0.00	690.77	690.79
A	248+51.50	0.00	690.65	690.67
B	248+61.50	0.00	690.53	690.55
End of N. Appr.	248+71.50	0.00	690.41	690.43

STAGE CONSTRUCTION LINE

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Grinding
Back of N. Abut	248+41.50	2.21	690.74	690.76
A	248+51.50	2.21	690.62	690.64
B	248+61.50	2.21	690.50	690.52
End of N. Appr.	248+71.50	2.21	690.38	690.40

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Grinding
Back of N. Abut	248+41.50	12.00	690.58	690.60
A	248+51.50	12.00	690.46	690.48
B	248+61.50	12.00	690.34	690.36
End of N. Appr.	248+71.50	12.00	690.22	690.24

EAST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations	Theoretical Grade Elevations Adjusted For Grinding
Back of N. Abut	248+41.50	18.00	690.46	690.48
A	248+51.50	18.00	690.34	690.36
B	248+61.50	18.00	690.22	690.24
End of N. Appr.	248+71.50	18.00	690.10	690.12

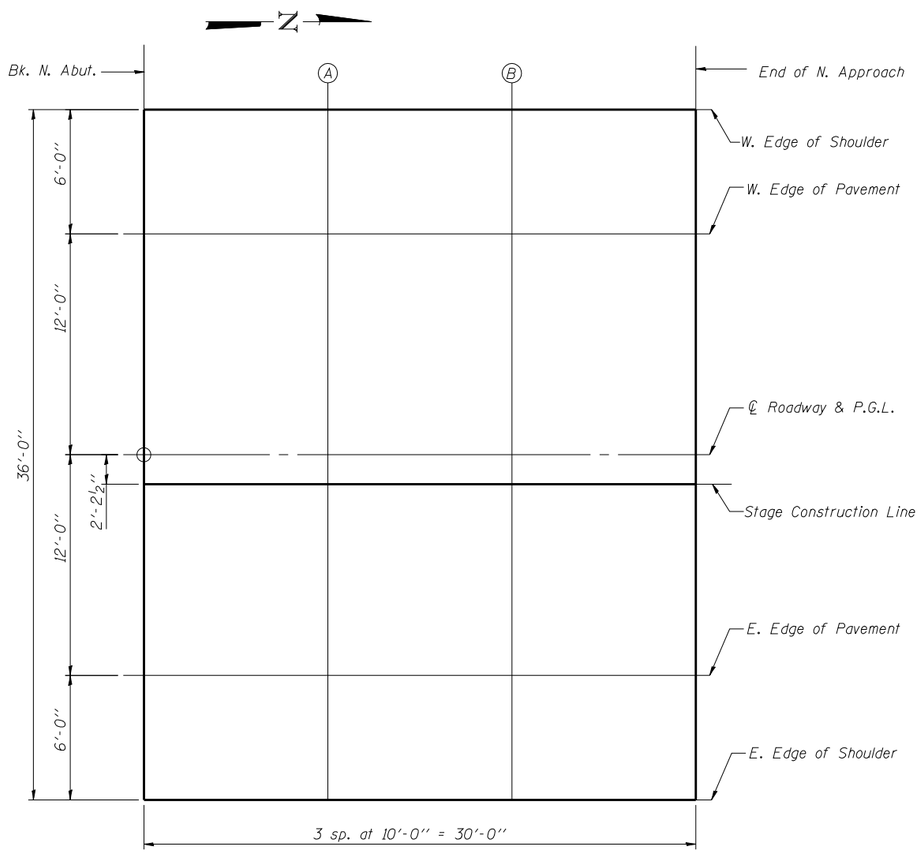

PLAN

TOP OF APPROACH SLAB ELEVATIONS
NORTH APPROACH
STRUCTURE NO. 010-0287

Coombe-Bloxdorf P.C.
-CIVIL ENGINEERS-
-STRUCTURAL ENGINEERS-
-LAND SURVEYORS-
Design Firm License No. 184-002703

PROJECT NO.	06027-3
SCALE	
DATE	8/03/09
DESIGN BY	
DRAWN BY	TFG
CHECKED BY	MCB

SHEET NO. 10
36 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
326	(137BR)BR	CHAMPAIGN	75	30
	SN 010-0287	CONTRACT NO. 70428		
	FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT	

PLOT DATE = 9/24/2009
FILE NAME = s:\pf-10-rr-opr-slab-elev.dgn
PLOT SCALE = 62.058794 ' / IN.
USER NAME = JNL

PA-E 10-1-08