SIGN DETAIL
1:100

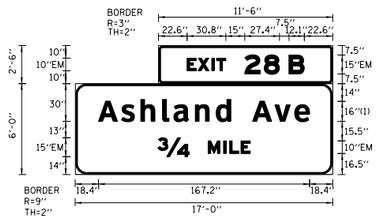

SIGN NUMBER	WB-02A-BM & WB-02B-BM
WIDTH x HGHT.	17'-0" x 6'-0"
BORDER WIDTH	2"
CORNER RADIUS	9" (Guide), 3" (Exit)
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ SHEETING
	COLOR: Green
LEGEND/BORDER	TYPE: ZZ SHEETING
	COLOR: White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: guide_exp_overhead.ssi
Dimensions are in inches.tenths
Letter locations are panel edge to lower left corner

FONT:
(1) ClearviewHwy-5-W

M.U.T.C.D.: 2009 Edition

LETTER POSITIONS (X)																LENGTH	SERIES/SIZE
E	X	I	T	2	8	B											EM 2000
22.6	31.4	42.2	46	68.4	83.7	103.3										92.9	10,15
A	s	h	l	a	n	d		A	v	e							ClearviewHwy-5-W
18.4	36.6	52	69.2	78.1	95.1	111.6	123.2	140.5	158.1	173.8						167.2	1613
34	M	I	L	E													EM 2000
65.4	105.3	117.4	122.2	131.2												73.3	15,10

SIGN DETAIL
1:100

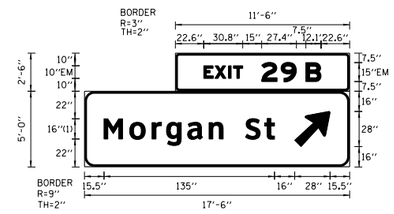

SIGN NUMBER	WB-03A-BM & WB-03B-BM
WIDTH x HGHT.	17'-6" x 5'-0"
BORDER WIDTH	2"
CORNER RADIUS	8"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ SHEETING
	COLOR: Green
LEGEND/BORDER	TYPE: ZZ SHEETING
	COLOR: White

SYMBOL	ROT	X	Y	WID	HT
AR_Type A	315	166.5	16	22.2	35.6

Panel Style: guide_exp_overhead.ssi
Dimensions are in inches.tenths
Letter locations are panel edge to lower left corner

FONT:
(1) ClearviewHwy-5-W

M.U.T.C.D.: 2009 Edition

LETTER POSITIONS (X)																LENGTH	SERIES/SIZE
E	X	I	T	2	9	B											EM 2000
22.6	31.4	42.2	46	68.4	83.7	103.3										92.9	10,15
M	o	r	g	a	n		S	t									ClearviewHwy-5-W
15.5	35.8	53.6	65	81.8	98.8	109.9	127.6	142.7								135.1	1613

FILE PATH = pw:\\380839-pwnt.bsecomonline.local:PWAECOM00\Documents\01 Americas\Transportation\60269938 Circle\Phase II\002.CAD\006.Roadway\Sheets\60W29_Contract\D160W29-sht-Sign-Det-06.dgn

D160W29-sht-Sign-Det-06.dgn	DESIGNED - JDT	REVISED -	
USER NAME = BAWitort	DRAWN - BAW	REVISED -	
PLOT SCALE = 20.0000 ' / in.	CHECKED - JMG	REVISED -	
PLOT DATE = 10/28/2013	DATE - 10/30/2013	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

BRIDGE MOUNT SIGN STRUCTURES
BRIDGE MOUNTED SIGN PANEL DESIGN DETAIL

SCALE: NONE | SHEET 5 OF 5 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94/290	2013-011R	COOK	356	107
		CONTRACT NO. 60W29		
		ILLINOIS FED. AID PROJECT		