F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
8852	06-00056-01-WR	MADISON	81	7
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	
EXISTING TYPICAL SECTIONS (POPLAR STREET)				

CONTRACT NO. 97324

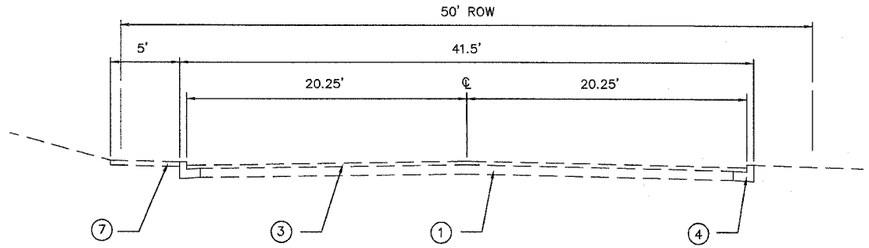

EXISTING TYPICAL SECTION
POPLAR STREET
22+00 TO 25+50
(NOT TO SCALE)

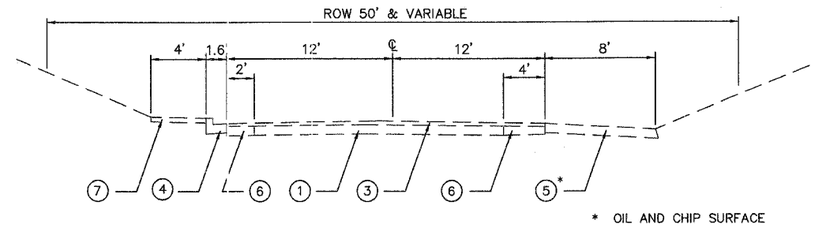

* OIL AND CHIP SURFACE

EXISTING TYPICAL SECTION
POPLAR STREET
STA. 29+00 TO 34+00
(NOT TO SCALE)

LEGEND

1. EXISTING PORTLAND CEMENT CONCRETE PAVEMENT, 8"
2. EXISTING BITUMINOUS AGGREGATE BASE COURSE, 8"
3. EXISTING HOT-MIX ASPHALT SURFACE, 3"
4. EXISTING COMBINATION CONCRETE CURB AND GUTTER
5. EXISTING AGGREGATE SHOULDER
6. EXISTING HOT-MIX ASPHALT BASE COURSE WIDENING
7. EXISTING PORTLAND CEMENT CONCRETE SIDEWALK, 4"
8. EXISTING PAVEMENT WIDENED AS SHOWN ON THE PLANS
9. PROPOSED LEVELING BINDER (MACHINE METHOD), N70, VARIABLE DEPTH, MINIMUM THICKNESS 3/4"
10. PROPOSED HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, 1-1/2"
11. PROPOSED COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24 (SEE HIGHWAY STANDARD 606001)
12. PROPOSED PORTLAND CEMENT CONCRETE SIDEWALK, 4" (SEE HIGHWAY STANDARD 424001)
13. HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH

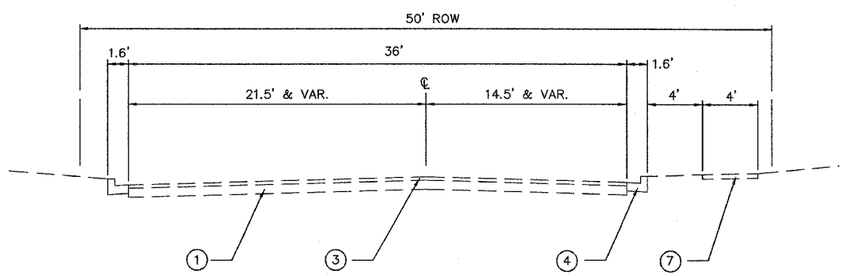

EXISTING TYPICAL SECTION
POPLAR STREET
STA. 18+50 TO 22+00
(NOT TO SCALE)

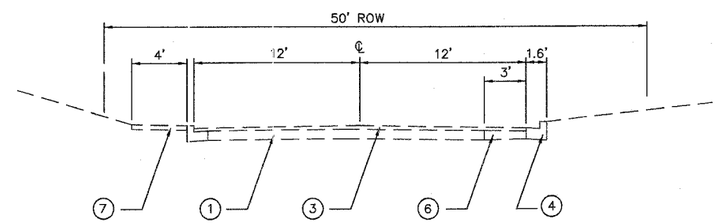

EXISTING TYPICAL SECTION
POPLAR STREET
STA. 27+50 TO 29+00
(NOT TO SCALE)

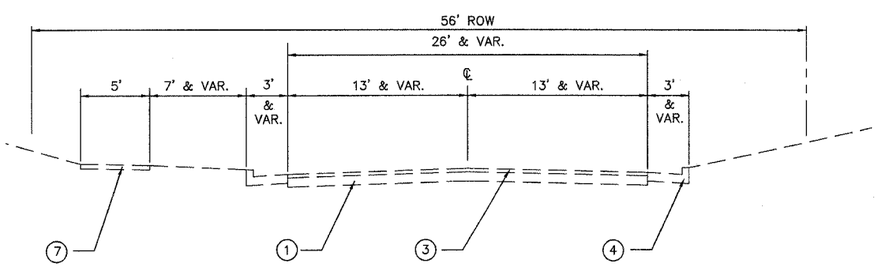

EXISTING TYPICAL SECTION
POPLAR STREET
STA. 15+50 TO 18+50
(NOT TO SCALE)

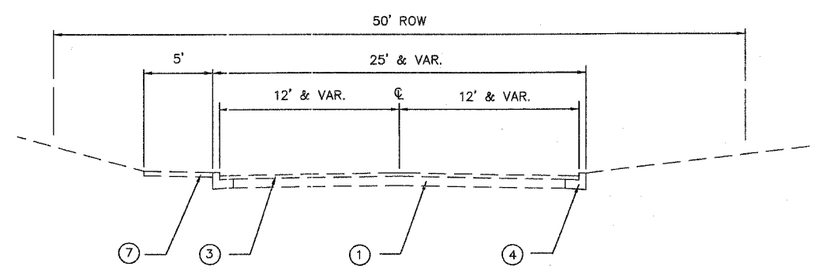

EXISTING TYPICAL SECTION
POPLAR STREET
25+50 TO 27+50
(NOT TO SCALE)

FINAL SURVEY		BY	DATE
NOTE BOOK	SURVEYED		
	PLOTTED		
	TEMPLATE		
	AREAS		
NO.	AREAS CHECKED		

ORIGINAL SURVEY		BY	DATE
NOTE BOOK	SURVEYED		
	PLOTTED		
	TEMPLATE		
	AREAS		
NO.	AREAS CHECKED		