NOTE: DISTANCES SHALL BE PROVIDED BY IDOT DISTRICT 4 OPERATIONS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	(34-6,55-1)	HANCOCK/ McDONOUGH	433	250
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

STATE CONTRACT NO. 68206

SIGN DETAIL

1:10

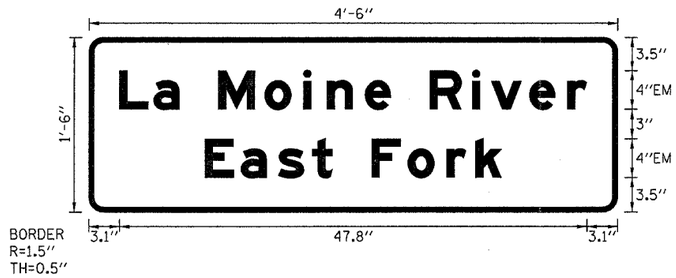

SIGN NUMBER	I-3	
WIDTH x HGHT.	4'-6" x 1'-6"	
BORDER WIDTH	0.5"	
CORNER RADIUS	1.5"	
MOUNTING	Ground	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/Pure White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: I-3.ssi

Dimensions are in inches.tenths

Letter spacings are to start of next letter

LETTER POSITIONS (X)

																																							LENGTH	SERIES/SIZE
	L	a		M	o	i	n	e		R	i	v	e	r																										EM 2000
3.1	3.5	3.4	3.2	4.7	4	2.4	3.9	3.1	3.6	4.3	2	3.9	3.9	2	3.1																							47.8	4/2.9
	E	a	s	t		F	o	r	k																														EM 2000
11.9	3.7	3.8	3.5	2.6	3.5	3.7	4	3	2.6	11.9																												30.3	4/2.9

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SIGN PANEL STANDARDS

SHEET 11 OF 14

SCALE: VERT. N/A HORIZ. N/A

DATE 6/21/04

DRAWN BY BDS

CHECKED BY SRD

Plot Date: 7/8/2005
Plot Time: 10:27:11 AM
Plotted By: bschmidt
Pen Tables: idot.tbl
Filename: H:\03633\Cad\T\Construction_Plans\223_Details\SignPanels.dgn