



LEGEND:
 XXX.XX PROPOSED ELEVATION (TOP OF TEMPORARY PAVEMENT)
 XXX.XX EXISTING ELEVATION (PAVEMENT OR GROUND)

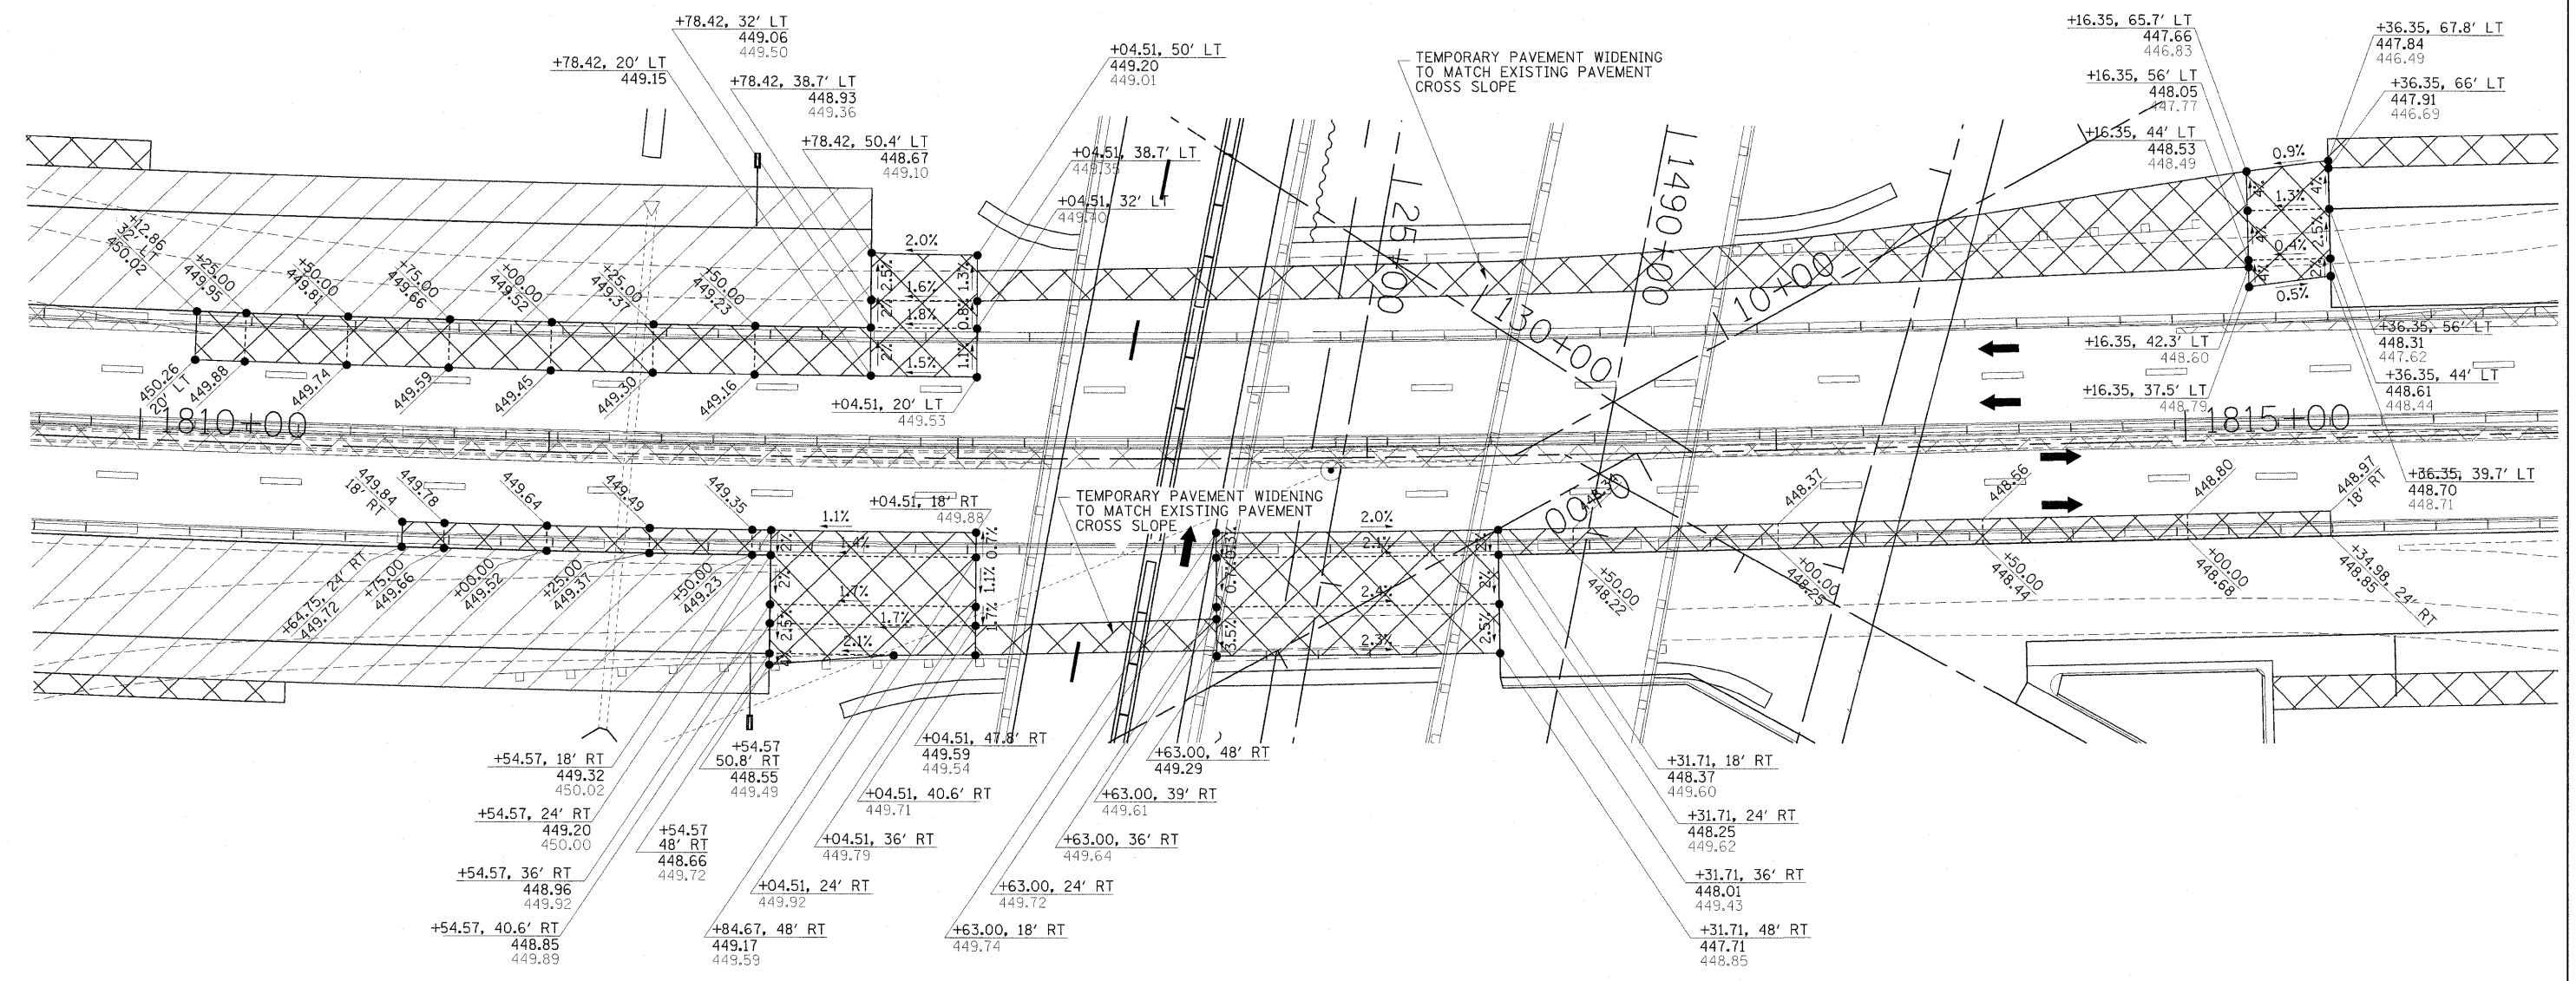

LEGEND

- WORK ZONE
- COMPLETED PAVEMENT
- TEMPORARY PAVEMENT - FULL DEPTH (CONSTRUCTED THIS STAGE)
- TEMPORARY PAVEMENT - FULL DEPTH (CONSTRUCTED PREVIOUS STAGE)
- TEMPORARY RAMP
- MILL/OVERLAY
- TEMPORARY CONCRETE BARRIER WALL
- IMPACT ATTENUATORS, TEMPORARY (FULLY REDIRECTIVE, NARROW)
- IMPACT ATTENUATORS, TEMPORARY (NON-REDIRECTIVE)
- DRUM WITH STEADY BURNING LIGHT
- TYPE II BARRICADE WITH STEADY BURNING LIGHT
- TYPE III BARRICADE WITH FLASHING LIGHTS
- DIRECTION OF TRAFFIC FLOW

- TEMPORARY PAVEMENT - SUGGESTED SEQUENCE OF CONSTRUCTION:**
1. CONSTRUCT ALL PERMANENT ITEMS OF WORK THAT ARE SCHEDULED FOR CONSTRUCTION IN STAGE 1A.
 2. CONSTRUCT ALL TEMPORARY PAVEMENT THAT CAN BE COMPLETED WITHOUT IMPACTING THE STAGE 1A TRAFFIC CONFIGURATION.
 3. PLACE ALL TEMPORARY STRIPING FOR THE STAGE 1B TRAFFIC CONFIGURATION THAT CAN BE PLACED WITHOUT IMPACTING THE STAGE 1A TRAFFIC CONFIGURATION.
 4. DURING A SINGLE OFF-PEAK PERIOD:
 - A. SHIFT TRAFFIC INTO THE STAGE 1B TRAFFIC CONFIGURATION AND CLOSE THE INSIDE LANE IN BOTH THE EASTBOUND AND WESTBOUND DIRECTIONS. THE LANE CLOSURE SHALL BE IN ACCORDANCE WITH 701601-07.
 - B. CONSTRUCT THE REMAINDER OF THE TEMPORARY PAVEMENT REQUIRED TO MAINTAIN THE STAGE 1B TRAFFIC CONFIGURATION.
 - C. OPEN ALL LANES AND COMMENCE STAGE 1B CONSTRUCTION.

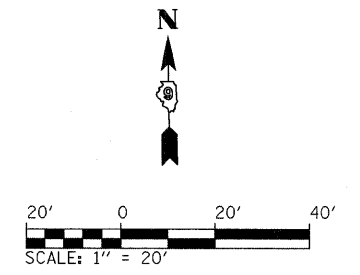

FILE NAME = ...ND978182-sht-stagingIA-IL13.TemporaryPavementDetails.dgn	USER NAME = Brad Downen	DESIGNED - JMS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MAINTENANCE OF TRAFFIC PLAN - IL 13 STAGE 1A - TEMPORARY PAVEMENT DETAILS				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	PLOT SCALE = 20,0000' / IN.	DRAWN - JMS	REVISED -		SCALE: 1" = 20'	SHEET NO.	OF	SHEETS	STA.	TO STA.	WILLIAMSON	968	216
	PLOT DATE = 10/12/2011	CHECKED - BJD	REVISED -								F.A.I. 57 AND F.A.P. 331	CONTRACT NO. 78182	
		DATE - 10/07/11	REVISED -								ILLINOIS FED. AID PROJECT		