


HOT-MIX ASPHALT BINDER COURSE, IL-19.0 FG, N70 - 43.5 TONS  
125' FROM STRUCTURE TO BE PLACED  
DURING STAGE 1 CONSTRUCTION

HOT-MIX ASPHALT BINDER COURSE, IL-19.0 FG, N70 - 43.5 TONS  
125' FROM STRUCTURE TO BE PLACED  
PRIOR TO STAGE 1 CONSTRUCTION

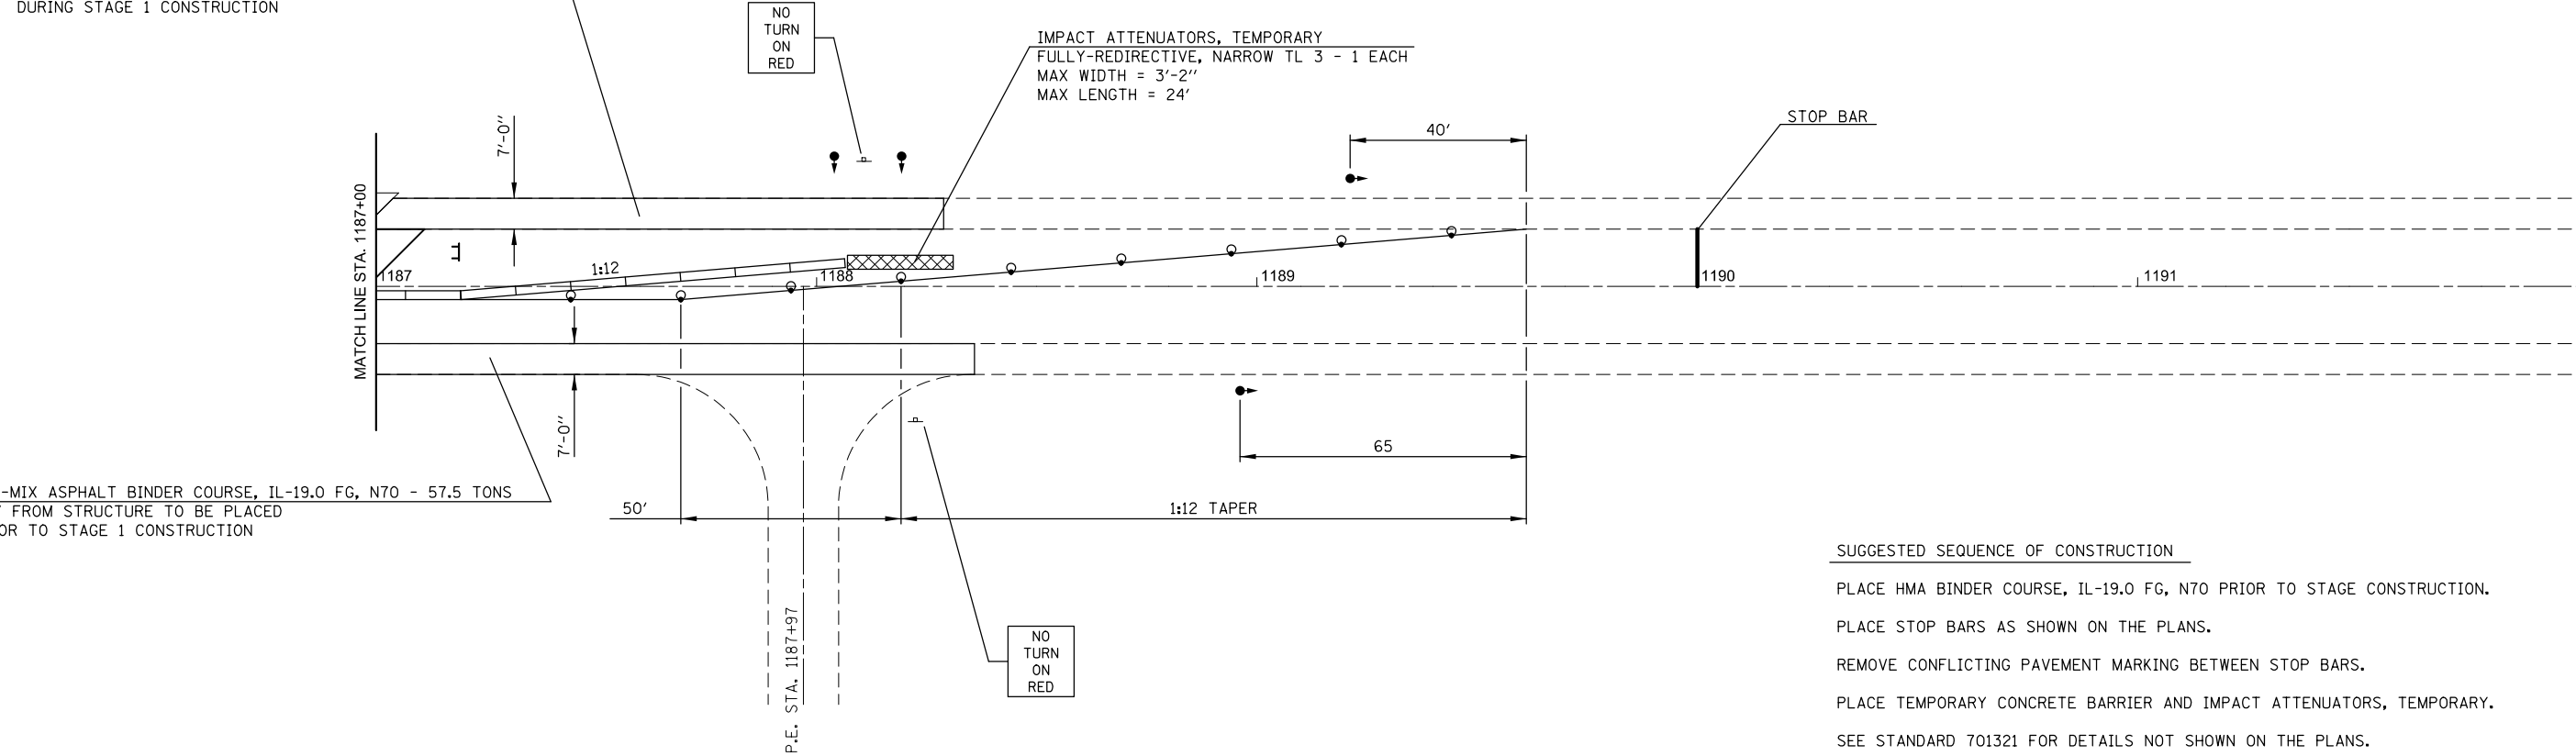

HOT-MIX ASPHALT BINDER COURSE, IL-19.0 FG, N70 - 57.5 TONS  
165' FROM STRUCTURE TO BE PLACED  
PRIOR TO STAGE 1 CONSTRUCTION

- SUGGESTED SEQUENCE OF CONSTRUCTION**
- PLACE HMA BINDER COURSE, IL-19.0 FG, N70 PRIOR TO STAGE CONSTRUCTION.
  - PLACE STOP BARS AS SHOWN ON THE PLANS.
  - REMOVE CONFLICTING PAVEMENT MARKING BETWEEN STOP BARS.
  - PLACE TEMPORARY CONCRETE BARRIER AND IMPACT ATTENUATORS, TEMPORARY.
  - SEE STANDARD 701321 FOR DETAILS NOT SHOWN ON THE PLANS.
  - COMPLETE STRUCTURE REPAIRS FOR STAGE I CONSTRUCTION.
  - PLACE WATERPROOFING MEMBRANE SYSTEM AND HMA SURFACE COURSE OVER STRUCTURE FOR STAGE I.
  - CONSTRUCT TEMPORARY RAMPS ON BOTH ENDS OF THE STRUCTURE FOR STAGE I.

FILE NAME = c:\pwwork\pwwork\challenged\0340922	USER NAME = challenged	DESIGNED - -	REVISED - -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>STAGE 1 CONSTRUCTION 042-0018</b>			F.A.P. RTE. 325	SECTION 113BR, 113BR-1	COUNTY JERSEY	TOTAL SHEETS 33	SHEET NO. 9
	D876044-sht-staging.dgn	DRAWN - -	REVISED - -		SCALE: 20	SHEET NO. 1 OF 2 SHEETS	STA.	TO STA.	<b>CONTRACT NO. 76G44</b>			
	PLOT SCALE = 40.0000' / in.	CHECKED - -	REVISED - -		FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT							
	PLOT DATE = 12/20/2013	DATE - -	REVISED - -									