


PRE-STAGING CONSTRUCTION DETAIL

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
57	*	DOUGLAS	65	16
STA. 41+00		TO STA. 47+00		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
* (15,21-25HB-2)BR				
CONTRACT NO. 90952				

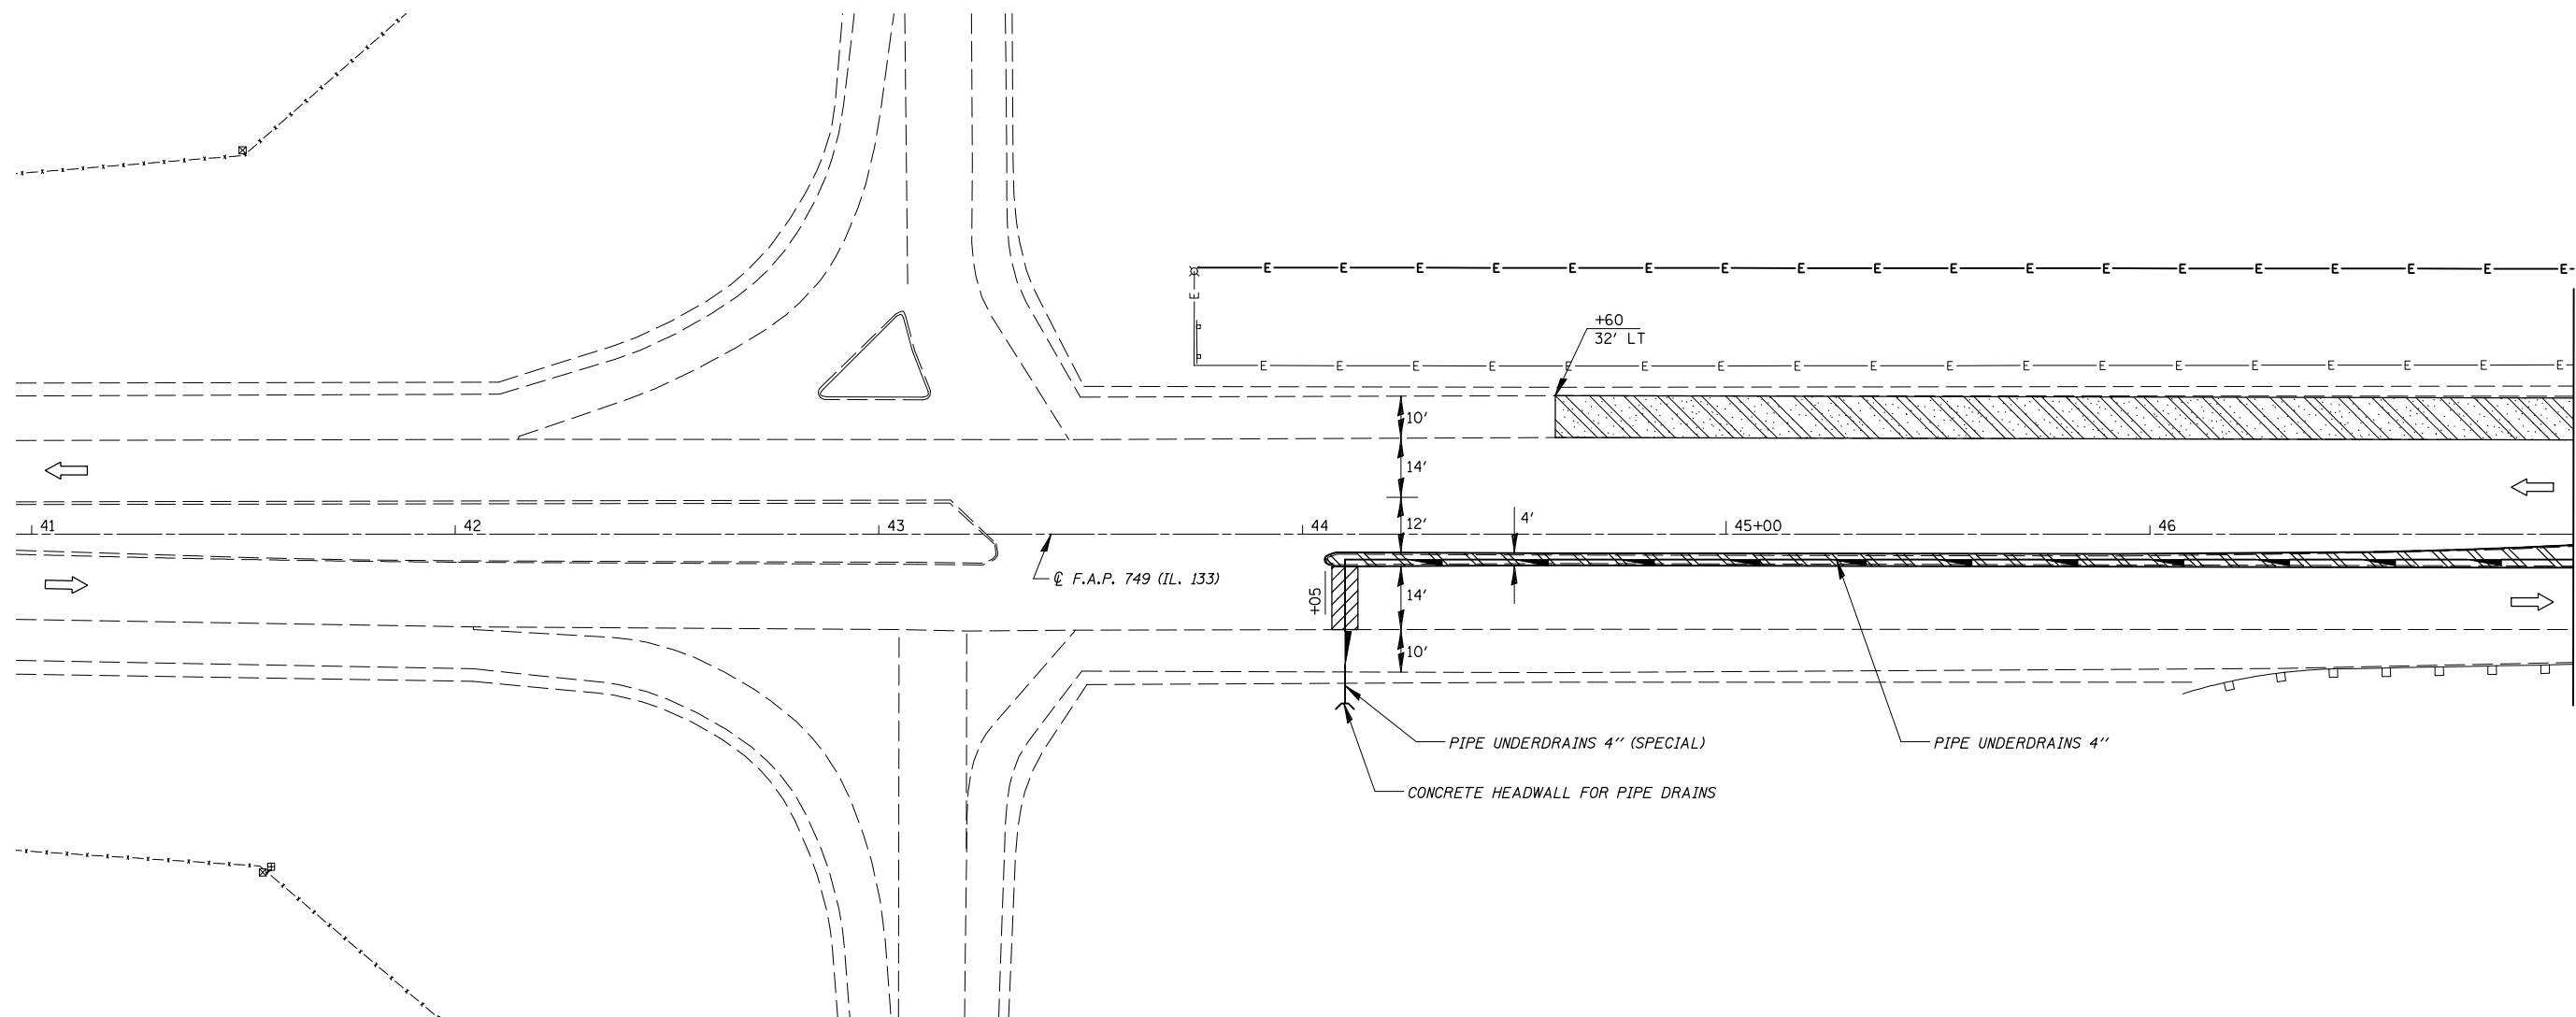

GENERAL NOTES

1. TRAFFIC CONTROL AND PROTECTION SHALL BE AS DETAILED ON 701201 WHEN OPERATIONS REQUIRE CLOSING A LANE. THE CONTRACTOR SHALL MAINTAIN 2-WAY, 1-LANE TRAFFIC ON ONE SIDE OF THE MEDIAN DURING WORK PERIODS. ALL LANES SHALL BE OPEN TO TRAFFIC DURING NONWORKING HOURS. THE INTERCHANGE RAMP SHALL BE KEPT OPEN TO TRAFFIC AT ALL TIMES.
2. REMOVAL AND REPLACEMENT OF THE EXISTING STABILIZED SUB-BASE TO INSTALL PIPE UNDERDRAINS 4" AND OUTLETS WILL BE PAID FOR AS SHOULDER REMOVAL AND REPLACEMENT. BACKFILL OF THE TRENCH SHALL BE AS SPECIFIED IN ARTICLE 601.04 EXCEPT THE HOT MIX ASPHALT MIXTURE THICKNESS SHALL BE 4".

- HOT-MIX ASPHALT SURFACE REMOVAL 8" PORTLAND CEMENT CONCRETE BASE COURSE 8"
- PORTLAND CEMENT CONCRETE BASE COURSE, 8"
- CLASS A PATCHES, TYPE II, 10"

PRE-STAGING CONSTRUCTION

- PRE-STAGING CONSTRUCTION CONSISTS OF THE FOLLOWING:
1. PIPE UNDERDRAINS, UNDERDRAIN OUTLETS, CONCRETE HEADWALLS, CLASS A PATCHES, PAVEMENT REMOVAL, AND EROSION CONTROL BLANKET STA. 44+10 TO STA. 48+50, STA. 51+50 TO STA. 55+90, AND STA. 56+72 TO STA. 62+08
 2. P.C.C. BASE COURSE 8", MEDIAN STA. 44+05 TO STA. 48+87.25 AND STA. 51+11 TO STA. 55+93
 3. P.C.C. RAMPED MEDIAN TERMINALS STA. 56+70.6 TO STA. 56+76.6 AND STA. 60+59.1 TO STA. 60+65.1
 4. CONCRETE MEDIAN SURFACE STA. 56+76.6 TO STA. 60+59.1
 5. CORRUGATED MEDIAN AND CORRUGATED MEDIAN (DOWELLED) STA. 60+59.6 TO STA. 62+11.35
 6. HOT-MIX ASPHALT SURFACE REMOVAL 8" AND P.C.C. BASE COURSE 8" LT STA. 44+60 TO STA. 48+89.8 AND STA. 51+10.1 TO STA. 55+10 (OUTSIDE SHOULDER)
 7. HOT-MIX ASPHALT SURFACE COURSE LT STA. 48+87.25 TO STA 51+11
 8. TEMPORARY GUARDRAIL AND TERMINALS LT STA. 48+14.9 TO STA. 48+92.75
 9. AUGERED PVC CONDUIT AND UNIT DUCT STA. 43+74 TO STA. 56+26
 10. PAVEMENT MARKING REMOVAL AND RAISED REFLECTIVE PAVEMENT MARKER REMOVAL STA. 44+38 TO STA. 55+92

SHEET 1 OF 4

PRE-STAGING CONSTRUCTION DETAIL

F.A.I. ROUTE 57
SECTION (15,21-25HB-2)BR
DOUGLAS COUNTY

CUMMINS ENGINEERING CORPORATION

JOB #: 2114.1
FILE: PRESTAGE
DATE: 10/13/06