PART OF THE NW 1/4 OF SEC. 35, TWP. 43 N., R. 11 E. OF THE 3RD. P.M., IN LAKE COUNTY, ILLINOIS.

PARCEL NUMBER	OWNER	TOTAL HOLDINGS ACRES	PART TAKEN ACRES	AREA IN EXISTING R.O.W. ACRES	REMAINDER AREA ACRES	EASEMENT AREA ACRES	EASEMENT PURPOSE	PERMANENT INDEX NUMBER	PROPERTY ACQUIRED BY
1DR0003DED 1DR3003T.E.	Speedway SuperAmerica L.L.C., a Delaware Limited Liability Company	2.360	0.127*	N/A	2.360	0.176	Construction Purposes	15-35-104-013 15-35-104-014 15-35-104-015 15-35-104-016	

* Area of Dedication

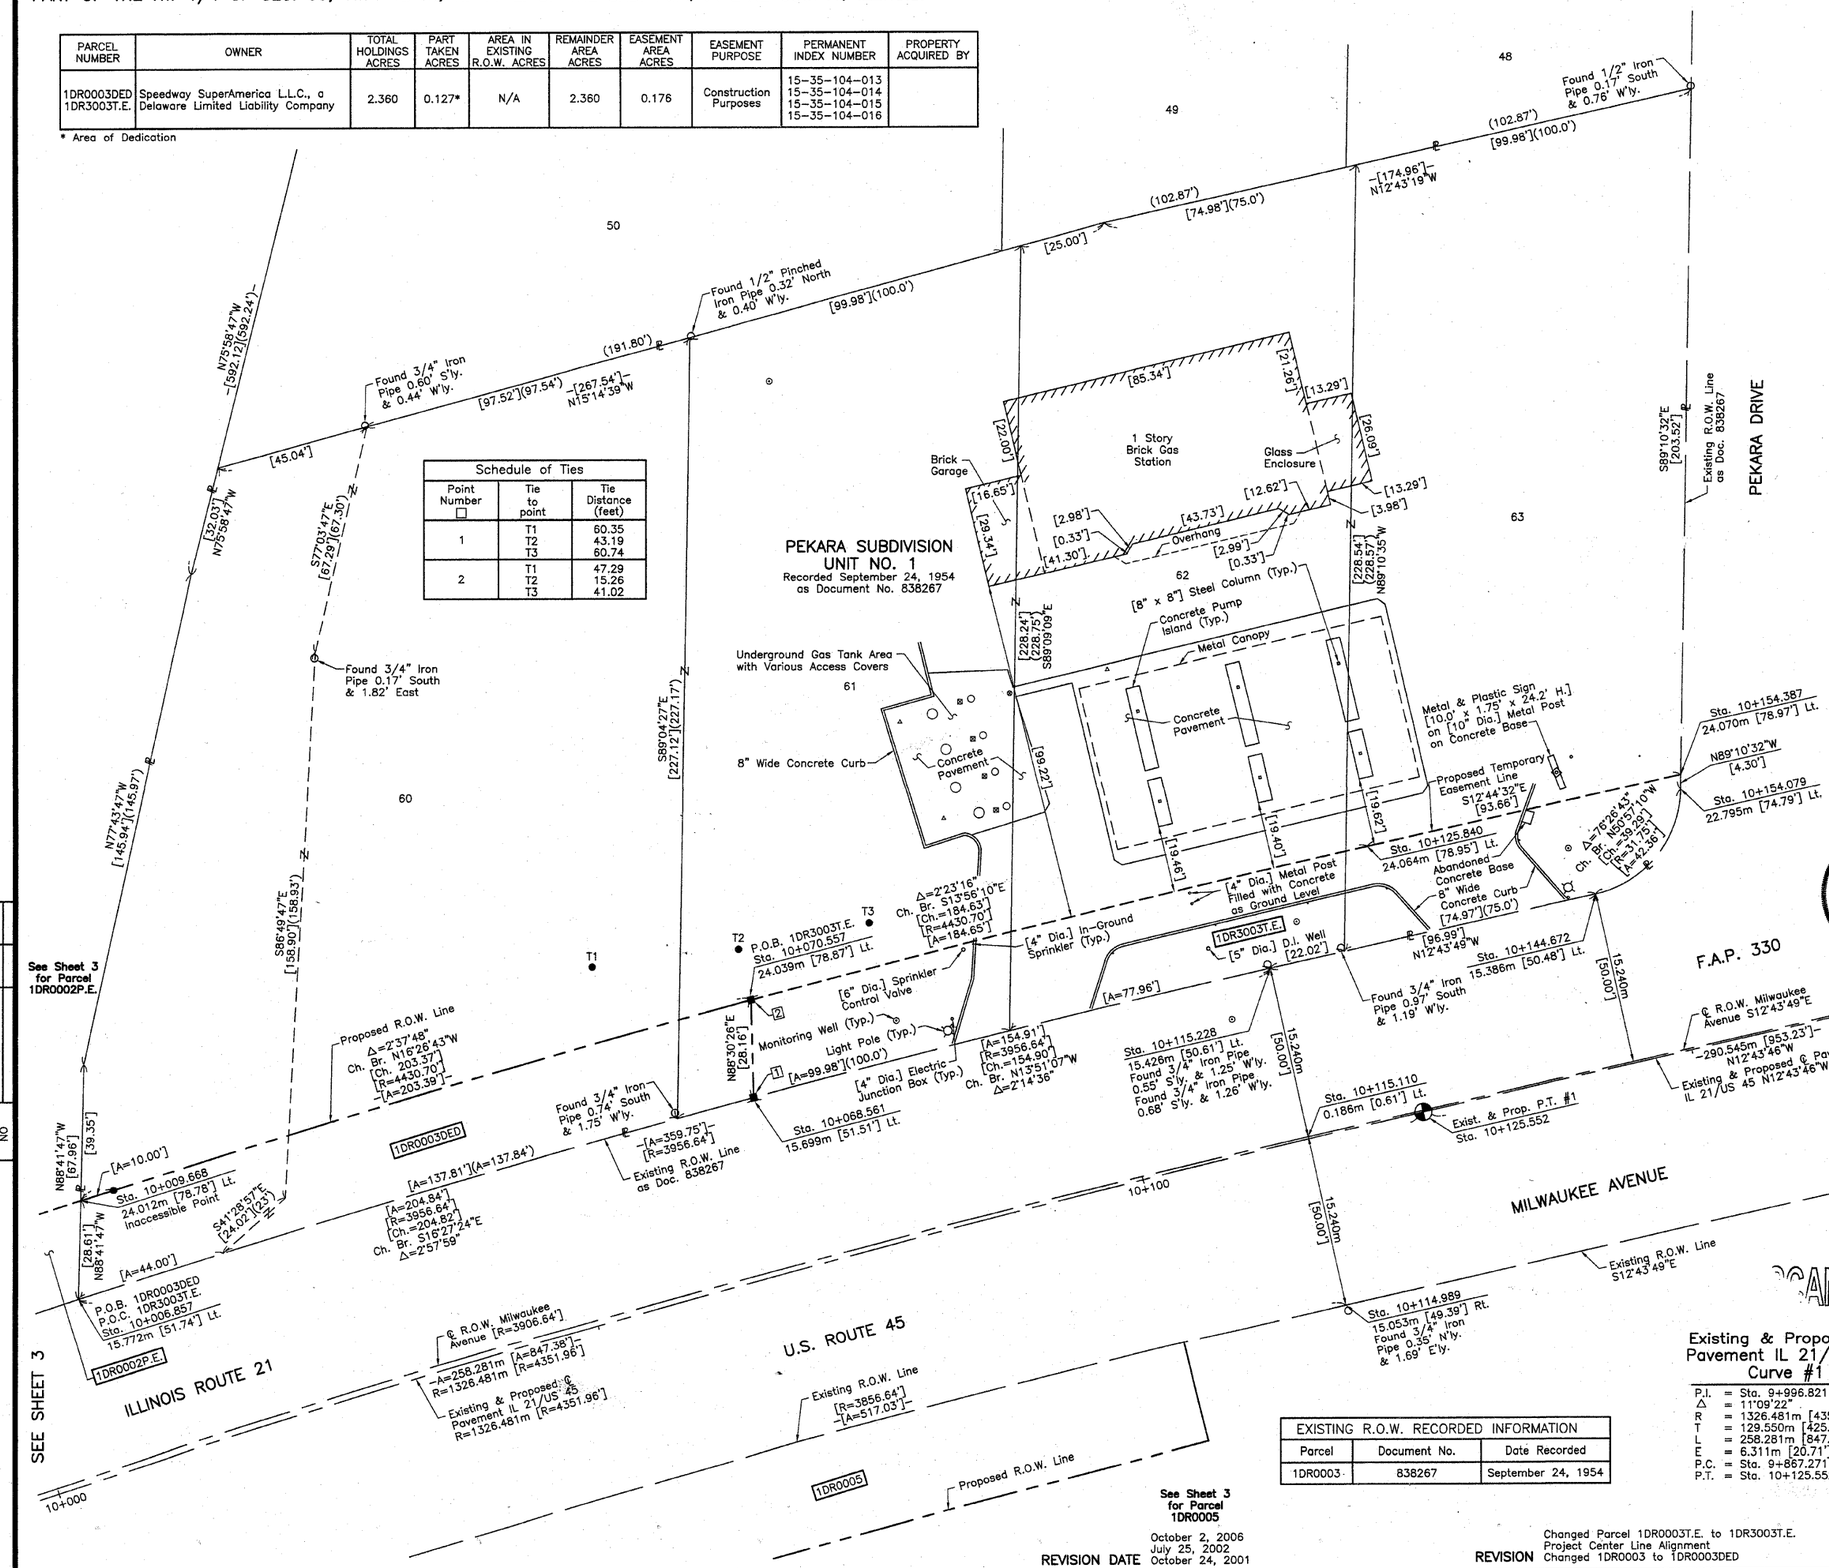

Schedule of Ties		
Point Number □	Tie to point	Tie Distance (feet)
1	T1 T2 T3	60.35 43.19 50.74
2	T1 T2 T3	47.29 15.26 41.02

LEGEND

SECTION CORNER (9 10 / 16 15)

QUARTER SECTION CORNER (16 — 15)

SECTION LINE
QUARTER SECTION LINE
QUARTER, QUARTER SECTION LINE
PLATTED LOT LINE
PROPERTY (DEED) LINE
APPARENT PROPERTY LINE
CENTER LINE
EXISTING RIGHT OF WAY LINE
PROPOSED RIGHT OF WAY LINE
PROPOSED EASEMENT
120.327m MEASURED DIMENSION
129.325m(Comp.) COMPUTED DIMENSION
RECORD DATA U.S. FOOT
MEASURED DIMENSION U.S. FOOT
EXISTING BUILDING

10 5 0 6.35
SCALE: 1:250

Bearings are referenced to the Illinois State Plane Coordinate Grid System, NAD27, East Zone.

○ IRON PIPE OR ROD FOUND
⊕ ."MAG" NAIL SET
\+ CUT CROSS FOUND OR SET
● 5/8" REBAR SET

● T1 T2 T3 ***THESE STAKES REFERENCE FOUND OR SET MONUMENTATION.*** SET 5/8 INCH IRON ROD FLUSH WITH GROUND TO TIE FOUND IRON STAKE. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER.

● BT1 BT2 BT3 ***THESE STAKES, IN CULTIVATED AREAS, REFERENCE FOUND OR SET MONUMENTATION.*** BURIED 5/8 INCH IRON ROD 20 INCHES BELOW GROUND TO TIE FOUND IRON STAKE. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER

■ ***STAKING OF PROPOSED RIGHT OF WAY.*** SET DIVISION OF HIGHWAYS SURVEY MARKER TO MONUMENT THE POSITION SHOWN. IDENTIFIED BY INSCRIPTION DATA AND SURVEYORS REGISTRATION NUMBER.

■ M ***STAKING OF PROPOSED RIGHT OF WAY IN CULTIVATED AREAS.*** BURIED 5/8 INCH METAL ROD 20 INCHES BELOW GROUND TO MARK FUTURE SURVEY MARKER POSITION IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER

PERMANENT SURVEY MARKER, I.D.O.T STD 2135 (TO BE SET BY OTHERS)

□ RIGHT OF WAY STAKING PROPOSED TO BE SET

STATE OF ILLINOIS)
)SS
COUNTY OF LAKE)

THIS IS TO CERTIFY THAT WE, JORGENSEN & ASSOCIATES, INC., AN ILLINOIS PROFESSIONAL DESIGN FIRM LAND SURVEYING CORPORATION, NUMBER 184-2771, HAVE SURVEYED THE PLAT OF HIGHWAYS SHOWN HEREON IN SECTION 35, TOWNSHIP 43N., RANGE 11E., OF THE THIRD PRINCIPAL MERIDIAN, LAKE COUNTY, THAT THE SURVEY IS TRUE AND COMPLETE AS SHOWN TO THE BEST OF MY KNOWLEDGE AND BELIEF, THAT THE PLAT CORRECTLY REPRESENTS SAID SURVEY, THAT ALL MONUMENTS FOUND AND ESTABLISHED ARE OF PERMANENT QUALITY AND OCCUPY THE POSITIONS SHOWN THEREON AND THAT THE MONUMENTS ARE SUFFICIENT TO ENABLE THE SURVEY TO BE RETRACED. MADE FOR THE DEPARTMENT OF TRANSPORTATION, STATE OF ILLINOIS.

DATED AT LAKE VILLA, ILLINOIS THIS 23rd DAY OF September 2002 A.D.

Christian H. Jorgensen
PRESIDENT
ILLINOIS PROFESSIONAL LAND SURVEYOR NO. 35-2797
LICENSE EXPIRATION DATE: NOVEMBER 30, 2002

CHRISTIAN H. JORGENSEN 2797 PROFESSIONAL LAND SURVEYOR STATE OF ILLINOIS LAKE VILLA, ILLINOIS

NOTE: COORDINATES ARE GROUND VALUES, CONVERTED TO METRIC UNITS.

COORDINATE TABLE			
STATION	OFFSET	NORTH	EAST
10+006.857	15.772m Lt.	610,308.4658	186,527.2172
10+009.668	24.012m Lt.	610,308.6641	186,518.4997
10+068.561	15.699m Lt.	610,368.3383	186,509.5314
10+070.557	24.039m Lt.	610,368.1147	186,500.9515
10+114.989	15.053m Rt.	610,420.8952	186,527.9587
10+115.110	0.186m Lt.	610,417.5368	186,513.0933
10+115.228	15.426m Lt.	610,414.1785	186,498.2279
10+125.840	24.064m Lt.	610,422.7347	186,487.3978
10+144.672	15.386m Lt.	610,443.0151	186,491.7133
10+154.079	22.795m Lt.	610,450.5590	186,482.4130
10+154.387	24.070m Lt.	610,450.5778	186,481.1014

SCANNED

Existing & Proposed ℄ Pavement IL 21/US 45 Curve #1

P.I. = Sta. 9+996.821
Δ = 11°09'22"
R = 1326.481m [4351.96']
T = 129.550m [425.03']
L = 258.281m [847.38']
E = 6.311m [20.71']
P.C. = Sta. 9+867.271
P.T. = Sta. 10+125.552

EXISTING R.O.W. RECORDED INFORMATION		
Parcel	Document No.	Date Recorded
1DR0003	838267	September 24, 1954

REVISION DATE	REVISION
October 2, 2006	Changed Parcel 1DR0003T.E. to 1DR3003T.E.
July 25, 2002	Project Center Line Alignment
October 24, 2001	Changed 1DR0003 to 1DR0003DED

MADE BY

JORGENSEN & ASSOCIATES, INC.
120 PARK AVENUE
LAKE VILLA, ILLINOIS 60046
(847) 356-3371

SHEET 1 IS A COVER SHEET AND IS NOT RECORDED.

PLAT OF HIGHWAYS
STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
F.A.P. 330 (IL 21/US 45)

SECTION 1Y-B-R-1 LAKE COUNTY
PROJECT JOB NO. R-91-059-01
STATION 10+000 TO STATION 10+150
SCALE: 1:250/1"=6.35 SHEET 4 OF 5

BUREAU OF LAND ACQUISITION
201 WEST CENTER COURT
SCHAUMBURG, ILLINOIS 60196

ROW PLAT	BY	DATE
MADE		
CHECKED		
INKED		
NOTEBOOK NO		