

GENERAL SEQUENCE OF WORK


1. INSTALL PERIMETER EROSION BARRIER, INLET AND PIPE PROTECTION, AND TEMPORARY DITCH CHECKS.
2. SITE CLEARING AND GRUBBING.
3. COMPLETE EARTHWORK AND INSTALL STORM SEWER.
4. CONSTRUCT PERMANENT SOIL EROSION AND SEDIMENT CONTROL ITEMS.
5. COMPLETE THE PERMANENT SOIL STABILIZATION.
6. REMOVE THE TEMPORARY SOIL EROSION AND SEDIMENT CONTROL ITEMS ONCE PERMANENT EROSION CONTROL ITEMS ARE ESTABLISHED.

NOTES FOR CONSTRUCTION STAGING

1. IN ADDITION TO THE INSPECTIONS OUTLINED IN THE PROJECT SPECIFICATIONS ALL TEMPORARY EROSION CONTROL ELEMENTS TO REMAIN FROM A PREVIOUS STAGE OF WORK SHALL BE VERIFIED PRIOR TO COMMENCING WITH THE FOLLOWING STAGES WORK. ANY ELEMENTS FOUND TO BE DEFICIENT OR NON OPERATIVE SHALL BE REPLACED AT ONCE.
2. THE CONTRACTOR WILL BE PERMITTED TO STOCKPILE IN AREAS OUTSIDE OF THE CURRENT STAGE OF CONSTRUCTION PROVIDED SOIL EROSION AND SEDIMENT CONTROL MEASURES ARE PROVIDED AT THE STOCKPILE SITE. THE CONTRACTOR'S SOIL EROSION AND SEDIMENT CONTROL PLAN MUST BE APPROVED BY THE ENGINEER PRIOR TO WORK BEGINNING AT THE STOCKPILE SITE.

TEMPORARY CONCRETE WASHOUT FACILITIES


1. THE CONTRACTOR MUST SUBMIT A PLAN OF HIS/HER PROPOSED TEMPORARY CONCRETE WASHOUT FACILITY TO THE RESIDENT ENGINEER FOR HIS/HER APPROVAL AT LEAST 10 DAYS PRIOR TO THE FIRST CONCRETE POUR.
2. TEMPORARY CONCRETE WASHOUT FACILITIES ARE TO BE IN PLACE BEFORE ANY DELIVERY OF CONCRETE TO THE CONSTRUCTION SITE.
3. TEMPORARY CONCRETE WASHOUT FACILITIES ARE TO BE LOCATED AT LEAST 50 FEET FROM STORM DRAIN INLETS, OPEN DRAINAGE FACILITIES, OR WATER BODIES. EACH FACILITY IS TO BE LOCATED AWAY FROM CONSTRUCTION TRAFFIC OR ACCESS AREAS TO PREVENT DISTURBANCE OR TRACKING.
4. A SIGN IS TO BE INSTALLED ADJACENT TO EACH TEMPORARY CONCRETE WASHOUT FACILITY TO INFORM CONCRETE EQUIPMENT OPERATORS OF THE DESIGNATED WASHOUT FACILITY.
5. TEMPORARY CONCRETE WASHOUT FACILITIES SHALL BE OF A TYPE APPROVED BY IDOT.
6. THE SIZE OF THE WASHOUT, INSPECTION, MAINTENANCE AND REMOVAL SHALL FOLLOW IDOT SPECIFICATIONS.

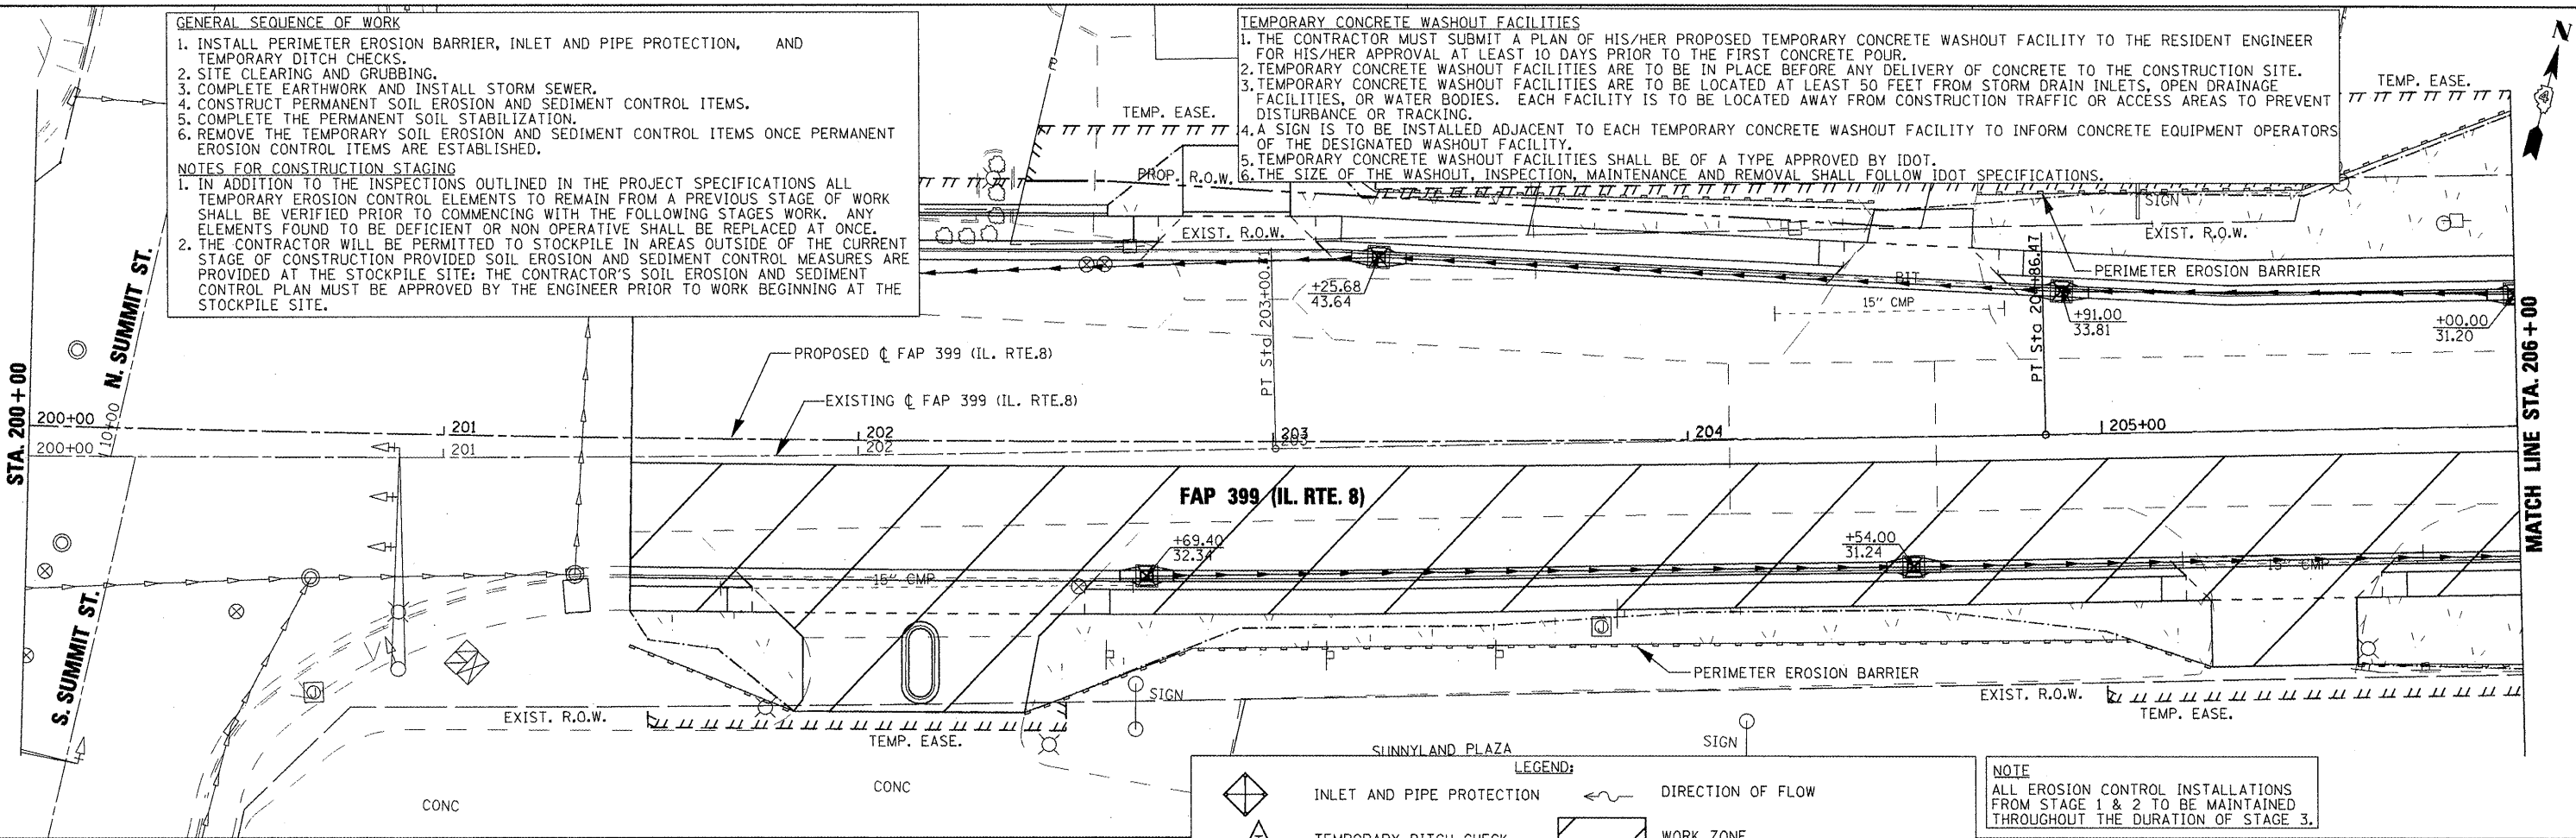

LEGEND:

- INLET AND PIPE PROTECTION
- TEMPORARY DITCH CHECK
- PERIMETER EROSION BARRIER
- DIRECTION OF FLOW
- WORK ZONE
- TEMPORARY EROSION CONTROL SEEDING (SEEDING CLASS 7)

NOTE
ALL EROSION CONTROL INSTALLATIONS FROM STAGE 1 & 2 TO BE MAINTAINED THROUGHOUT THE DURATION OF STAGE 3.

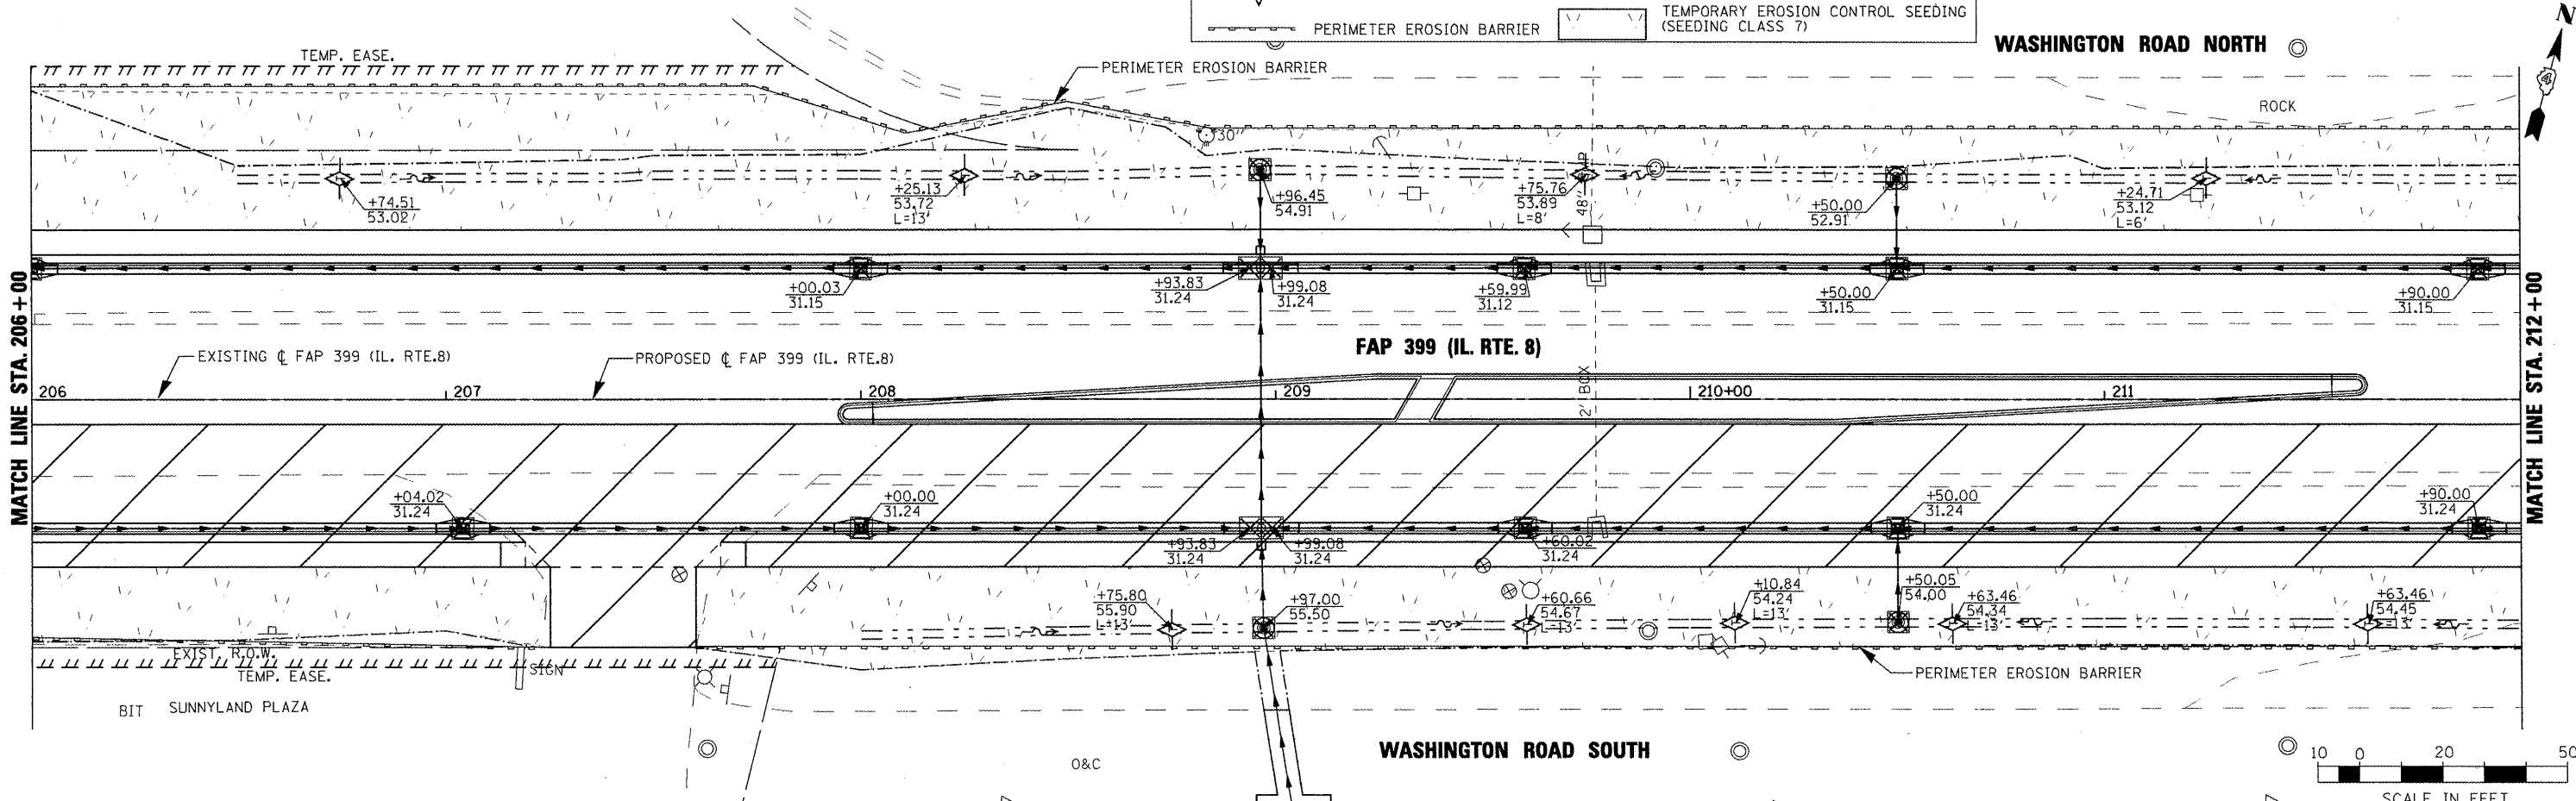

FILE NAME =	USER NAME = IDOT	DESIGNED - MD	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	FAP 399 (IL. RTE. 8) EROSION CONTROL PLAN- STAGE 3			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
x:\projects\200803566\dgn\04-Rte8-sht-E	05-31.dgn	DRAWN - LF	REVISED -		SCALE: AS SHOWN	SHEET NO.	OF	SHEETS	399	36 R-7	TAZEWELL	390	170
PLOT SCALE = 39.9999 / IN.	CHECKED - GG	REVISED -	DATE - 11/25/09		STA. 200+00.00	TO	STA. 212+00.00	ILLINOIS FED. AID PROJECT					
PLOT DATE = 10/21/2011	DATE -	REVISED -											

