SIGN DETAIL
1:80

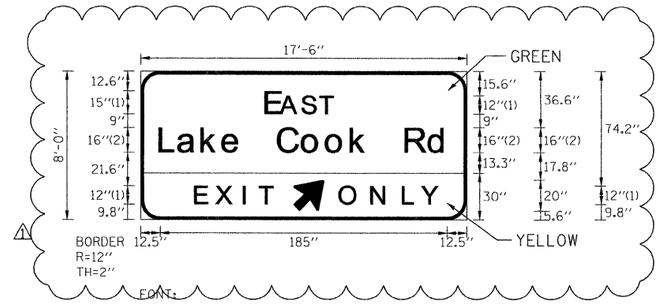

SIGN NUMBER	NB-53-TR-43
WIDTH x HGHT.	17'-6" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
ARSHRT	45	98.2	5.5	22.2	25

Panel Style: guide_fwy_overhead.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																		LENGTH	SERIES/SIZE
E	A	S	T																																ClearviewHwy-5-W
81	90.5	104.3	115.7																															43.3	15,12
L	a	k	e	C	o	o	k	R	d																										ClearviewHwy-5-W-R
12.5	24.3	39.5	52.9	88.7	104.3	119.7	135.6	170.9	186																									185	16/13
E	X	I	T																																ClearviewHwy-5-W
35.4	48.8	66.5	76.8																															50	12
O	N	L	Y																																ClearviewHwy-5-W
128.5	149.1	169.5	181.5																															63.5	12

SD-14

200 22ND Street, Suite 216, Lombard, IL 60148
630.705.0110 voice, 630.839.2566 fax
www.mps-il.com
MILLENNIA PROFESSIONAL SERVICES

DESIGNED - CJD	REVISED - 1	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	ILLINOIS ROUTE 53 RAND ROAD TO LAKE COOK ROAD
DRAWN - CJD	REVISED -		
CHECKED - TVN	REVISED -		
DATE - 2/24/2011	REVISED -		

SIGNING DETAILS
STA 485+00

SCALE: · SHEET NO. OF SHEETS STA. · TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2592	2010-003 I	COOK	43	31
		CONTRACT NO. 60K21		

FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT

P:\2009\ME09006_VarVar PhII\CADD\W019_IL53\Shts\D160K21-sht-sgn_6.dgn

FILE NAME = P:\2009\ME09006_VarVar PhII\CADD\W019_IL53\Shts\D160K21-sht-sgn_6.dgn
PLOT SCALE = 1 / 1
PLOT DATE = 2/24/2011
USER NAME = Millennia Professional Services