
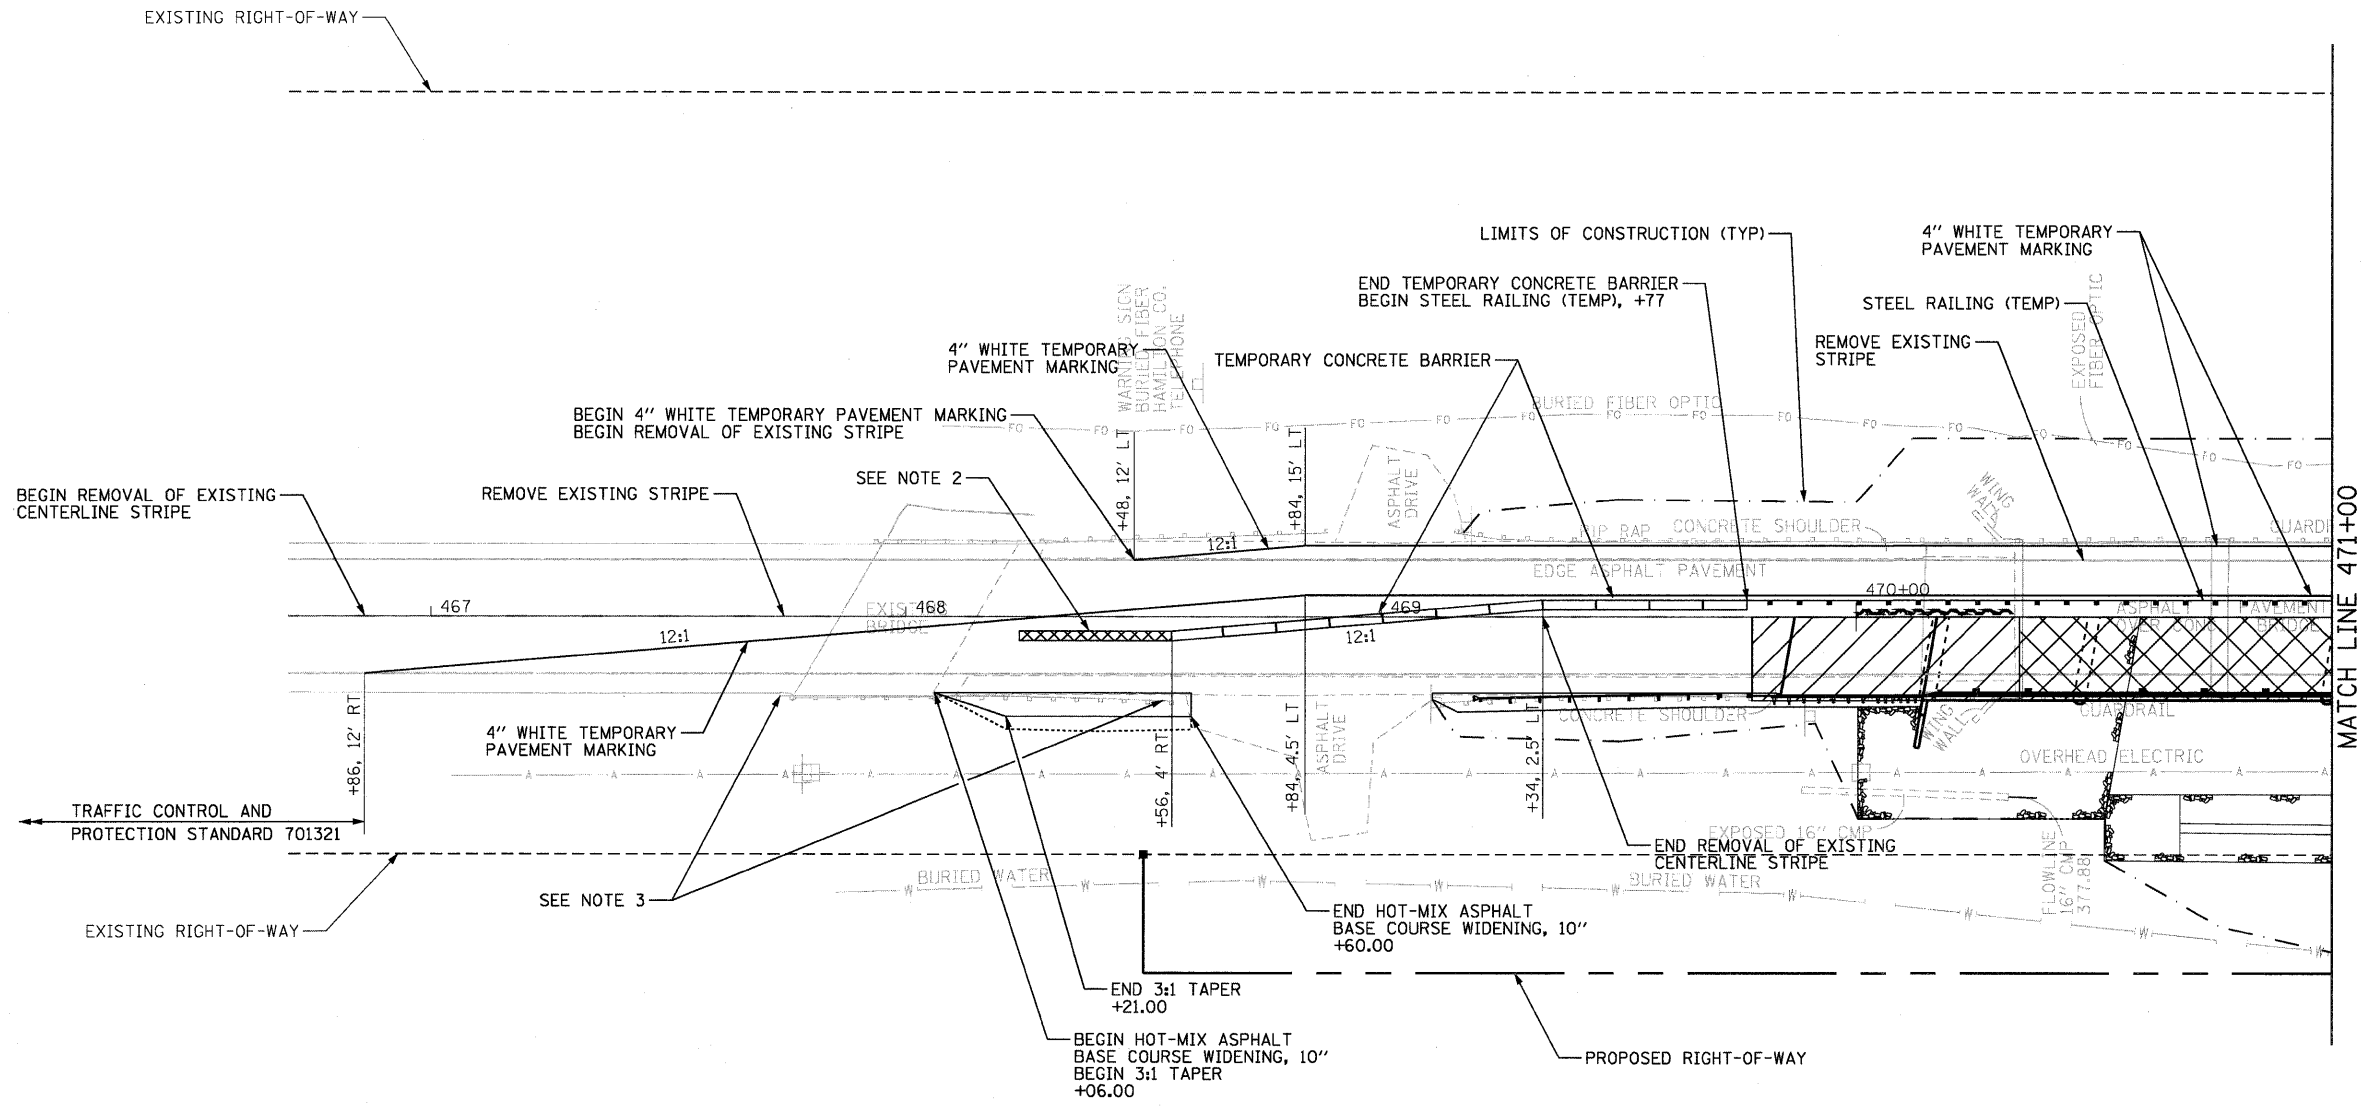


- NOTES:
1. TEMPORARY CONCRETE BARRIER OFFSET CALLOUTS ARE TO CENTERLINE OF BARRIER.
 2. IMPACT ATTENUATORS TEMPORARY (FULLY REDIRECTIVE, NARROW) TEST LEVEL 3.
 3. REMOVE TRAFFIC BARRIER TERMINALS, TYPE 6 AND TYPE 1 IMMEDIATELY FOLLOWING PLACEMENT OF THE IMPACT ATTENUATOR. REINSTALL THE TERMINALS IMMEDIATELY PRIOR TO REMOVING THE ATTENUATOR AT THE END OF STAGE 1.



LEGEND

BRIDGE REMOVAL	
PAVEMENT REMOVAL	
IMPACT ATTENUATOR, TEMPORARY	
TEMPORARY CONCRETE BARRIER	
TEMPORARY STEEL RAILING	
TEMPORARY SHORING	

STAGE 1 SEQUENCE OF CONSTRUCTION

1. CONSTRUCT BASE COURSE WIDENING (LEFT SIDE).
2. INSTALL TEMPORARY TRAFFIC SIGNALS.
3. INSTALL TRAFFIC CONTROL STANDARD 701321.
4. REMOVE THE EXISTING IL 242 SOUTHBOUND BRIDGE AND APPROACHES AS SPECIFIED IN THE STRUCTURAL PLANS.
5. INSTALL TEMPORARY SHORING IN LOCATIONS SPECIFIED IN THE STRUCTURAL PLANS.
6. CONSTRUCT THE IL 242 SOUTHBOUND BRIDGE AND APPROACHES AS SPECIFIED IN THE STRUCTURAL PLANS.
7. INSTALL LEFT SIDE GUARDRAIL AS SPECIFIED IN THE ROADWAY PLANS.
8. REMOVE TEMPORARY SHORING.
9. CONSTRUCT BASE COURSE WIDENING (RIGHT SIDE).

FILE NAME = d978016-sh1-staging0101.dgn	USER NAME = r08sr1	DESIGNED - APF	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGE 1 CONSTRUCTION	F.A. RTE. 776	SECTION (102)B-1	COUNTY HAMILTON	TOTAL SHEETS 53	SHEET NO. 10	
		DRAWN - APF	REVISED -			SHEET NO. 1 OF 4 SHEETS		STA. 466+70 TO STA. 471+00		CONTRACT NO. 78016	
		CHECKED - RSB	REVISED -			FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT					
		DATE - 1/15/2009	REVISED -								