


**PRE STAGE TYPICAL SECTION  
US ROUTE 30**

STA 260+30.00 TO 275+38.00

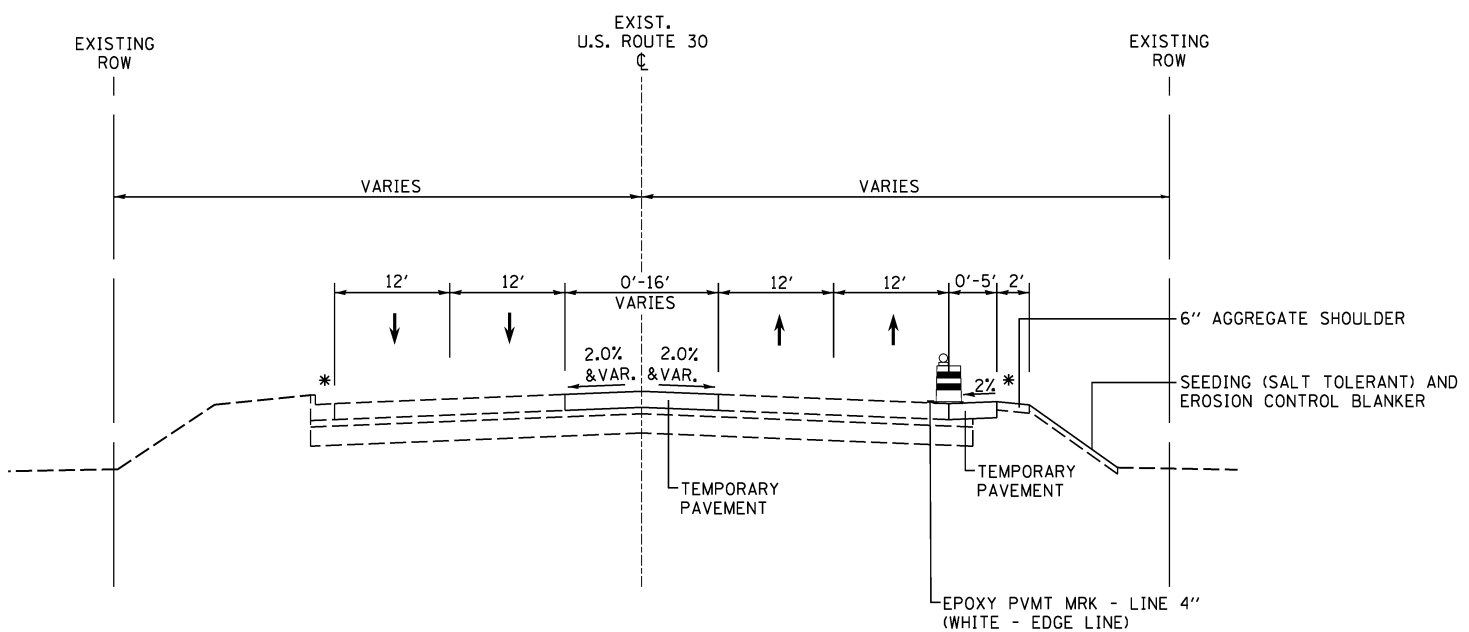

**PRE STAGE TYPICAL SECTION  
US ROUTE 30**

STA 275+38.00 TO 298+01.00

TEMPORARY PAVEMENT FOR ALL STAGES SHALL CONSIST OF THE FOLLOWING:  
  
2" HMA SURFACE COURSE, MIX "D", N70  
7" HMA BINDER COURSE, IL-19.0, N70  
  
OR  
  
9" PCC CONCRETE PAVEMENT (JOINTED)  
  
(BOTH PAVEMENT SECTIONS SHALL BE ON AGGREGATE BASE COURSE, TYPE B, 4" (TYP))

**ADVANCED PRE-STAGE 1A NOTES**

1. INSTALL TEMP PAVEMENT ALONG THE SOUTHBOUND CURB LINE OF ROUTE 30 AS WELL AS THE EXISTING MEDIAN AS DEPICTED ON THE PRE-STAGE MOT SHEETS. LANE CLOSURES FOR THIS WORK SHALL BE DAILY LANE CLOSURES ONLY, PER HIGHWAY STANDARD 701602.
2. INSTALLATION OF MAIN LINE STORM SEWER FROM STRUCTURE 39 TO STRUCTURE TEMP 7 WILL REQUIRE A LANE CLOSURE LONGER THAN ONE DAY. CLOSURE SHALL EXTEND FROM STA 265+00 - 277+00 AND FOLLOW HIGHWAY STANDARD 701602.
3. THE INSTALLATION OF STRUCTURE TEMP 7 AND STRUCTURE 39 WILL REQUIRE A LANE CLOSURE EXTENDING LONGER THAN ONE DAY. CLOSURE SHOULD FOLLOW HIGHWAY STANDARD 701606-08.
4. WHERE TEMPORARY PAVEMENT IS INSTALLED AND EXISTING CURB IS REMOVED, TYPE 24 FRAME AND GRATE IS TO BE REPLACED WITH TYPE 1 OPEN LID.
5. INSTALL TEMPORARY EROSION AND SEDIMENT CONTROL DEVICES PER SWPPP.
6. CONSTRUCT TEMPORARY PAVEMENT.
7. CONSTRUCT TEMPORARY DRAINAGE STRUCTURE AND STORM SEWER.
8. INSTALL TEMPORARY SIGNAL AT SAUK TRAIL AND ROUTE 30.
9. CONSTRUCT DRIVEWAY TO RELOCATED ALPINE VILLAGE ENTRANCE.
10. INSTALL TREE PROTECTION.

**ADVANCED PRE-STAGE 1B NOTES**

1. INSTALL TRAFFIC CONTROL PER HIGHWAY STANDARD 701606-08 TO CLOSE US 30 OUTSIDE LANE (NORTHBOUND ONLY) IN ORDER FOR CN RAILROAD FORCES TO INSTALL FOUNDATIONS FOR RELOCATED RAILROAD WARNING DEVICES NEEDED FOR STAGES 1 AND 2.
2. THIS STAGE WILL BE LIMITED TO 5 WORKING DAYS IMMEDIATELY BEFORE THE BEGINNING OF STAGE 1.

\* ALL LANE WIDTHS ARE MEASURED FROM THE WEST EDGE OF PAVEMENT.



V3 Companies  
7325 Janes Avenue  
Woodridge, IL 60517  
630.724.9200 phone  
630.724.9202 fax  
www.v3co.com

USER NAME = hshh	DESIGNED - DSS	REVISED -
PLOT SCALE = 10.0000' / 1in.	DRAWN - DRP	REVISED -
PLOT DATE = 8/21/2013	CHECKED - VJD	REVISED -
	DATE - 08/14/2013	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

**MAINTENANCE OF TRAFFIC - PRE STAGES 1A & 1B  
TYPICAL SECTIONS**

SCALE: N/A SHEET NO. 1 OF 6 SHEETS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
353	11-Y-A	COOK	354	40
CONTRACT NO. 60R19				
ILLINOIS FED. AID PROJECT				