SIGN DETAIL

1:75

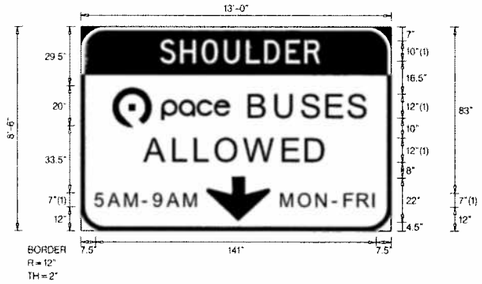

FONT:
(1) ClearviewHwy-5-W

Panel Style: REG2.ssi
M.U.T.C.D. 2009 Edition

SIGN NUMBER	name
WIDTH x HGHT.	13'-0" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: White
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black,White /Black

SYMBOL	ROT	X	Y	WID	HT
pace	0	12.5	52.5	59.4	20
ARDOWN	0	62	4.5	32	22

Panel Style: REG2.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																		LENGTH	SERIES-SIZE
S	H	O	U	L	D	E	R																													ClearviewHwy-5-W
35.9	46.4	57.7	70.5	82.2	91.3	102.9	112.6																											84.1	10
B	U	S	E	S																															ClearviewHwy-5-W
85.1	98.4	111.5	124.1	134.9																													58.4	12
A	L	L	O	W	E	D																													ClearviewHwy-5-W
32.5	47.2	58.1	68.4	82.7	102.1	113.8																											90.9	12
5	A	M	–	9	A	M																													ClearviewHwy-5-W
7.5	14.1	22.6	31.8	37	43.8	52.4																											51.3	7
M	O	N	–	F	R	I																													ClearviewHwy-5-W
101	109.9	118.9	127.4	132.9	139.5	147.1																											47.5	7

FILE NAME = c:\pwwork\pwidot\galbanjr\d0381808\D1252014-sht-details.dgn	USER NAME = galbanjr	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION
		DRAWN -	REVISED -	
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -	
Default	PLOT DATE = 2/27/2014	DATE -	REVISED -	

SIGN DETAIL SHEET
I-55 BUS ON SHOULDER PROJECT

SCALE: | SHEET OF SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55	2014-009SG	COOK	32	24
		CONTRACT NO. 60X90		
	ILLINOIS FED. AID PROJECT			