


**STAGE I CONSTRUCTION**

(STA. 14+70 TO STA. 20+15)

THIS STAGE WILL CONSIST OF THE FOLLOWING:

1. PROPOSED STORM SEWER CONNECTION TO EXISTING 120" STORM SEWER AT FRANKLIN AVE.
2. COMPLETION OF ALL OTHER DRAINAGE AND UTILITY WORK WITHIN THIS AREA, INCLUDING THE TEMPORARY TIE IN OF THE SEWER AT EXCHANGE, WHICH SHALL BE PAID FOR AS TEMPORARY DRAINAGE CONNECTION
3. ROADWAY RECONSTRUCTION.
4. COMPLETION OF ANY IMPROVEMENTS PLANNED BY RAILROAD.

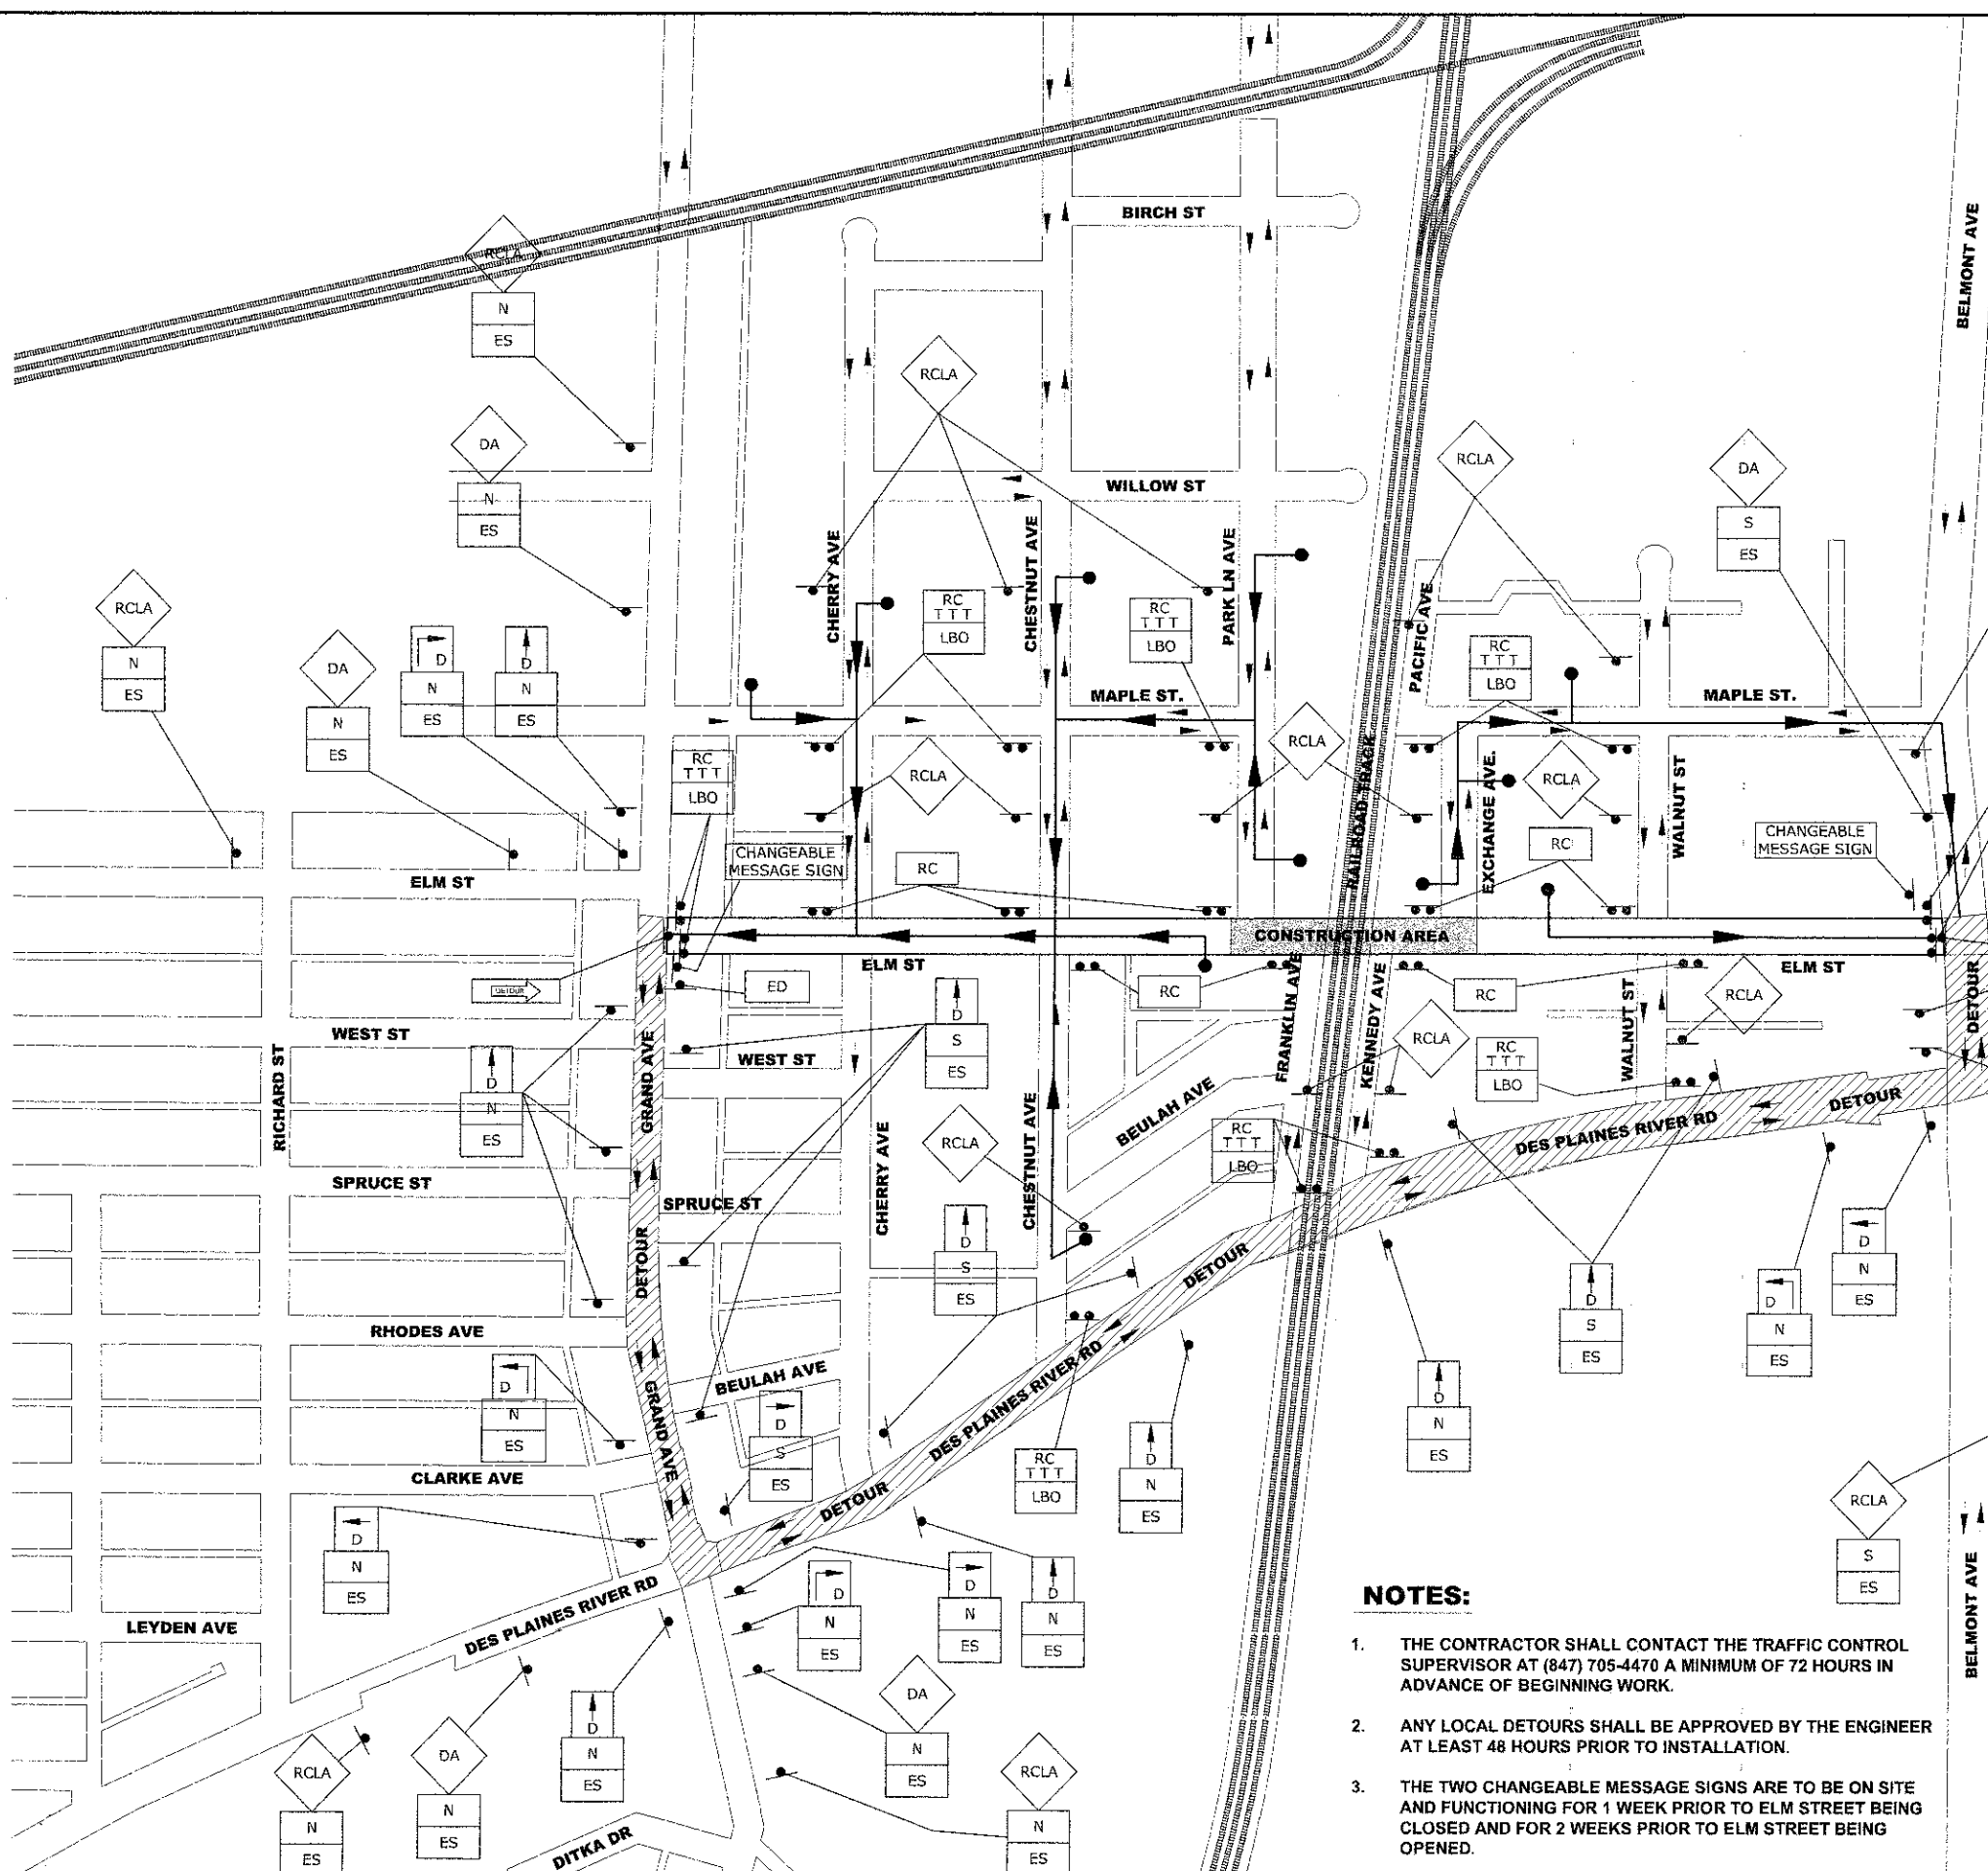

**PROJECT STAGING & LOCAL ACCESS**

1. ACCESS MUST BE MAINTAINED AT ALL TIMES FOR EMERGENCY VEHICLES.
2. THE TRENCHES FOR STORM SEWER LATERALS ON EAST HALF OF ROAD SHALL BE BACKFILLED TO THE TOP OF THE EXISTING PAVEMENT TO PROVIDE LOCAL ACCESS.
3. THE CONTRACTOR SHALL BE RESPONSIBLE FOR BAGGING ALL REGULATORY SIGNS THAT ARE NOT APPLICABLE DURING CONSTRUCTION.
4. ACCESS MUST BE MAINTAINED FOR GARBAGE COLLECTION FOR THE DURATION OF THIS PROJECT. IF ACCESS IS UNAVAILABLE DURING PICK-UP, IT WILL BE THE CONTRACTOR'S RESPONSIBILITY TO RELOCATE REFUSE CONTAINERS TO A SUITABLE LOCATION TO BE PICKED UP. THE CONTRACTOR WILL BE RESPONSIBLE FOR RETURNING THE CONTAINERS TO THE PROPER LOCATION AFTER COLLECTION.
5. ALL UNDERGROUND WORK MUST BE COMPLETED PRIOR TO REMOVING PAVEMENT ON EAST SIDE. THE WEST SIDE WILL HAVE PAVEMENT REMOVED PRIOR TO INSTALLATION OF STORM SEWERS.

**NOTES:**

1. THE CONTRACTOR SHALL CONTACT THE TRAFFIC CONTROL SUPERVISOR AT (847) 705-4470 A MINIMUM OF 72 HOURS IN ADVANCE OF BEGINNING WORK.
2. ANY LOCAL DETOURS SHALL BE APPROVED BY THE ENGINEER AT LEAST 48 HOURS PRIOR TO INSTALLATION.
3. THE TWO CHANGEABLE MESSAGE SIGNS ARE TO BE ON SITE AND FUNCTIONING FOR 1 WEEK PRIOR TO ELM STREET BEING CLOSED AND FOR 2 WEEKS PRIOR TO ELM STREET BEING OPENED.

Drawing file: W:\Projects\76012052\... ELM STREET RECONSTRUCTION PHASE II\18-21\_Maintenance of Traffic.dwg Dec 07, 2012 - 2:42pm

**HANCOCK ENGINEERING**  
 Civil Engineers  
 Municipal Consultants  
 Established 1911  
 3913 Roosevelt Road  
 Wheeling, Illinois 60154-4780  
 Phone: 708/965-0390  
 Fax: 708/965-4212

DESIGNED -	CB/SBC	REVISED -	
DRAWN -	ECW, MK, DMM	REVISED -	
CHECKED -	MDL	REVISED -	
DATE -	12-7-12	REVISED -	

**STATE OF ILLINOIS  
 DEPARTMENT OF TRANSPORTATION**

**MAINTENANCE OF TRAFFIC DETOUR FOR THROUGH  
 TRAFFIC SIGNING PLAN  
 STAGE I**

SCALE: NOT TO SCALE    SHEET NO. 3 OF 4 SHEETS    STA. -    TO STA. -

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1260	12-00097-00-PV	COOK	56	20
FIELD BOOK NO. : X		CONTRACT NO. 63774		
FED. ROAD DIST. NO. 1		ILLINOIS	FED. AID PROJECT	