



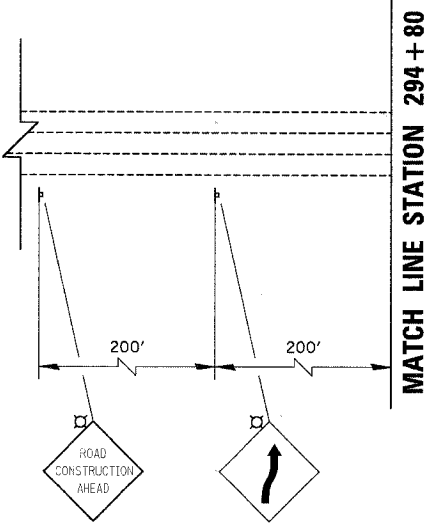









F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2585	97-00071-00-PV	COOK	116	35
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

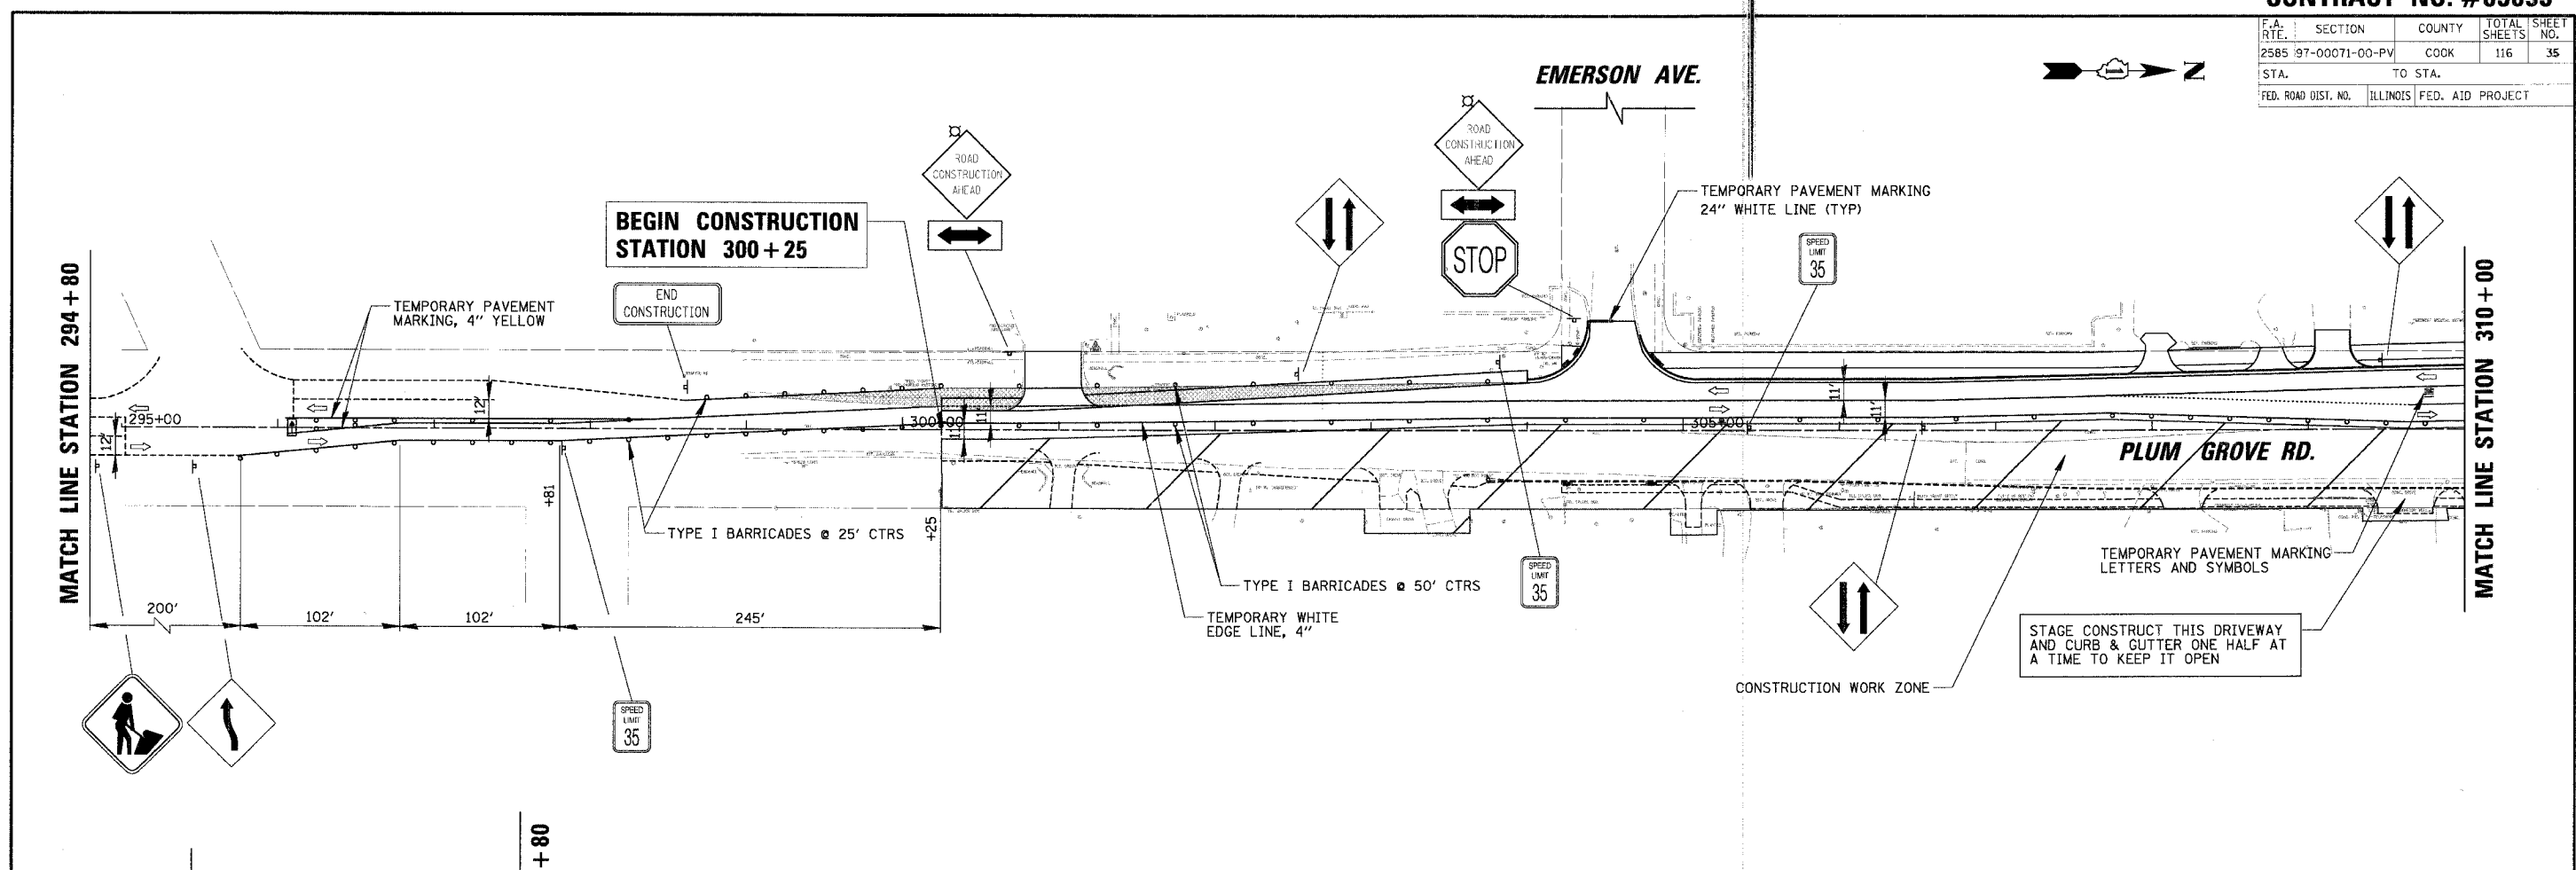

LEGEND

-  CONSTRUCTION WORK ZONE
-  TEMPORARY PAVEMENT
-  DRUM OR BARRICADE (TYPE I) 50' CTRS (TYP.) - 25' CTRS IN TAPERS, CURVES AND RADII
-  TYPE III BARRICADE
-  ARROW BOARD
-  SIGN ON PORTABLE OR PERMANENT SUPPORT
-  SIGN WITH 18"x18" ORANGE FLAG ATTACHED
-  DIRECTION OF TRAFFIC FLOW
-  FLASHING LIGHT
-  VERTICAL PANELS

Maintenance of Construction Notes

Stage 2 MOT:
 Maintain one through lane in each direction and left turn lanes at Kirchoff Rd. and Euclid Ave. on the newly constructed west side of Plum Grove Rd. Install proposed permanent pavement markings. Close the through lanes adjacent to the median on Kirchoff Road. Maintain 1 through lane in each direction and a left turn lane at Plum Grove Road. Maintain the proposed permanent lane configurations on the newly constructed Dupont Ave. Close the through lanes adjacent to the median on Euclid Avenue. Maintain 1 through lane in each direction and left turn lanes at Plum Grove Road.

Stage 2 Construction:
 Construct the proposed NB lanes and appurtenances along Plum Grove Rd. Construct the proposed median and adjacent pavement on Kirchoff Rd. Construct the proposed median and adjacent pavement of Euclid Ave. Switch traffic over to Stage 3 configuration

DATE	BY
DATE	BY
DATE	BY

CHRISTOPHER B. BURKE ENGINEERING LTD.
 9575 West Higgins Road, Suite 600
 Rosemont, Illinois 60018
 (847) 823-0500

DATE	BY
DATE	BY
DATE	BY

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
PLUM GROVE ROAD
MAINTENANCE OF TRAFFIC
STAGE II
STATION 300+25 TO STATION 310+00
 SCALE: 50'
 DATE: 6/8/2006
 DRAWN BY: PMM
 CHECKED BY: MCW