F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
9089	04-00180-02-PV	MADISON	92	54
FED. ROAD DIST. NO. _	ILLINOIS	FED. AID PROJECT		

CONTRACT NO. 97299

N QUADRANT

STATIONING ALONG 20TH STREET	OFFSET TO E.O.P.	E.O.P. ELEVATION	STATIONING ALONG OMAHA STREET	OFFSET TO E.O.P.	DISTANCE ALONG RAD.
	FOOT	FOOT		FOOT	FOOT
126+10.50	24.18 LT	414.42	N/A	N/A	0.000
126+17.31	30.69 LT	414.78	N/A	N/A	10.00
126+18.70	37.00 LT	414.83	N/A	N/A	16.51

E QUADRANT

STATIONING ALONG 20TH STREET	OFFSET TO E.O.P.	E.O.P. ELEVATION	STATIONING ALONG OMAHA STREET	OFFSET TO E.O.P.	DISTANCE ALONG RAD.
	FOOT	FOOT		FOOT	FOOT
126+54.70	22.00 LT	414.51	N/A	N/A	0.000
126+45.43	25.21 LT	414.39	N/A	N/A	10.00
126+40.12	33.47 LT	414.26	N/A	N/A	20.00
126+39.70	37.00 LT	414.22	N/A	N/A	23.56

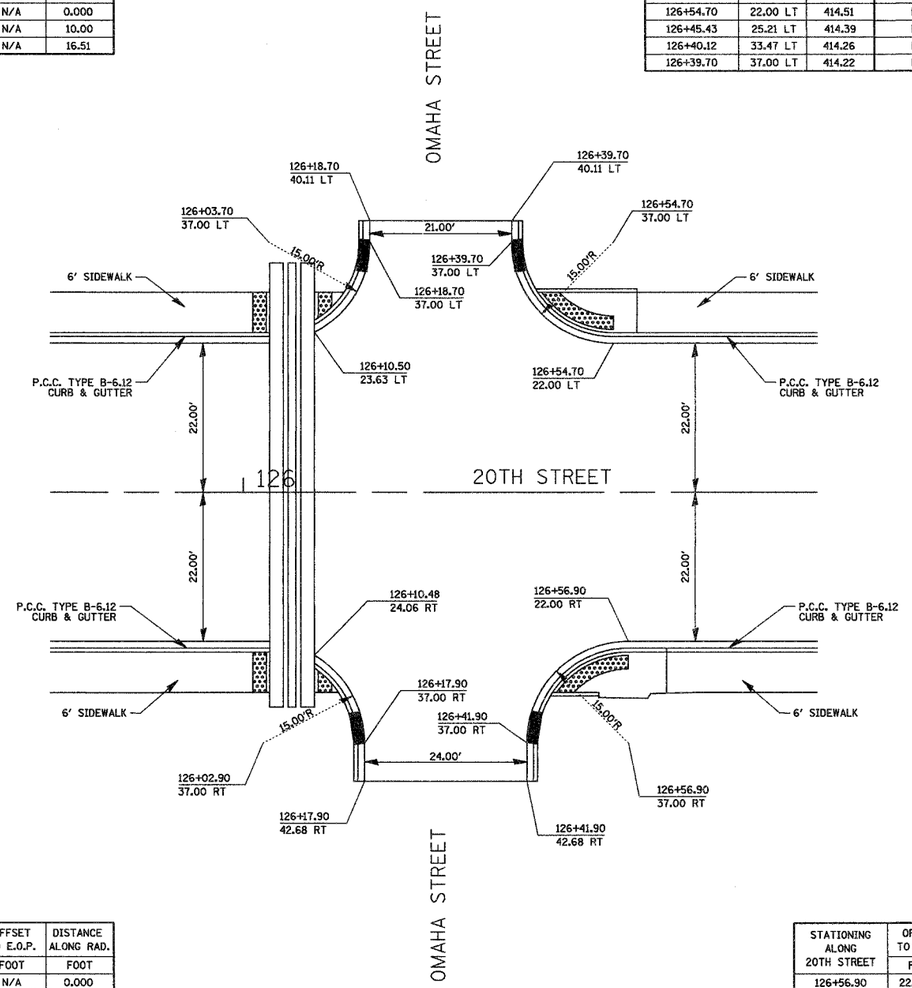

W QUADRANT

STATIONING ALONG 20TH STREET	OFFSET TO E.O.P.	E.O.P. ELEVATION	STATIONING ALONG OMAHA STREET	OFFSET TO E.O.P.	DISTANCE ALONG RAD.
	FOOT	FOOT		FOOT	FOOT
126+10.48	24.62 RT	414.42	N/A	N/A	0.000
126+16.86	31.52 RT	414.63	N/A	N/A	10.00
126+17.90	37.00 RT	414.71	N/A	N/A	15.61

S QUADRANT

STATIONING ALONG 20TH STREET	OFFSET TO E.O.P.	E.O.P. ELEVATION	STATIONING ALONG OMAHA STREET	OFFSET TO E.O.P.	DISTANCE ALONG RAD.
	FOOT	FOOT		FOOT	FOOT
126+56.90	22.00 RT	414.51	N/A	N/A	0.000
126+47.62	25.21 RT	414.55	N/A	N/A	10.00
126+42.32	33.47 RT	414.59	N/A	N/A	20.00
126+41.90	37.00 RT	414.60	N/A	N/A	23.56

0 10 20
SCALE

FINAL SURVEY — SURVEYED / PLOTTED / NOTE BOOK / TEMPLATE / AREAS / NO. / AREAS CHECKED — BY — DATE

ORIGINAL SURVEY — SURVEYED / PLOTTED / NOTE BOOK / TEMPLATE / AREAS / NO. / AREAS CHECKED — BY — DATE

Juneau Associates, Inc. P.C.
CONSULTING ENGINEERS AND LAND SURVEYORS
2100 State Street, P.O. Box 1325, Granite City, Illinois 62040, Phone:(618)877-1400/(618)452-9535, Fax:(618)452-9541
100 North Research Drive, Edwardsville, Illinois 62025, Phone: (618)659-0900/(618) 659-0800, Fax: (618)659-0941

GEOMETRICS
F.A.U. ROUTE 9089
20TH STREET (PHASES II, III & IV)
GRANITE CITY, ILLINOIS
SECTION No. 04-00180-02-PV

REVISIONS			
NO.	DATE	BY	REMARKS
DWG. NO.			

SCALE: 1 inch = 10 feet

DSN. BY:	BFK	DATE:	12/26/06	SHEET
DWN. BY:	JJB	DATE:	12/26/06	54
CHK'D:	BFK	DATE:	12/26/06	
JOB NO.	E030204	DGN. NAME:	GEO_05	OF 92 SHTS