


NOTE: THE PEDESTRIAN SIGNAL HEAD IN THE NORTHWEST CORNER ON THE 25FT. WOOD POLE SHALL BE BAGGED AND DISCONNECTED DURING STAGE II.2A, II.2B, AND II.3A. IT WILL BE NEEDED AGAIN IN STAGES II.3B AND II.4A.

SIGNAL HEAD PLACEMENTS FOR STAGES: II.3A AND II.3B

I.D.O.T. TRAFFIC SIGNAL INSTALLATION ELECTRICAL SERVICE REQUIREMENTS					TOTAL WATTAGE
TYPE	NO LAMPS	WATTAGE	%OPERATION		
SIGNAL (RED)	16	135	17	0.50	136
(YELLOW)	16	135	25	0.25	100
(GREEN)	20	135	15	0.25	75
ARROW		135	12	0.10	
PED. SIGNAL	8	90	25	1.00	200
CONTROLLER	1	100	100	1.00	100
ILLUM. SIGN				0.05	
VIDEO SYSTEM	1	150		1.00	150
FLASHER				0.50	
ENERGY COSTS TO:				TOTAL =	761

ENERGY SUPPLY CONTACT: ELLIE SARALLO
 PHONE: (630) 424 5124
 COMPANY: COMMONWEALTH EDISON

FILE NAME =	USER NAME = #USER#	DESIGNED - PKG	REVISED -
#FILE#		DRAWN - MAA, EA	REVISED -
	PLOT SCALE = #SCALE#	CHECKED - PKG	REVISED -
	PLOT DATE = #DATE#	DATE - 12/16/2011	REVISED -

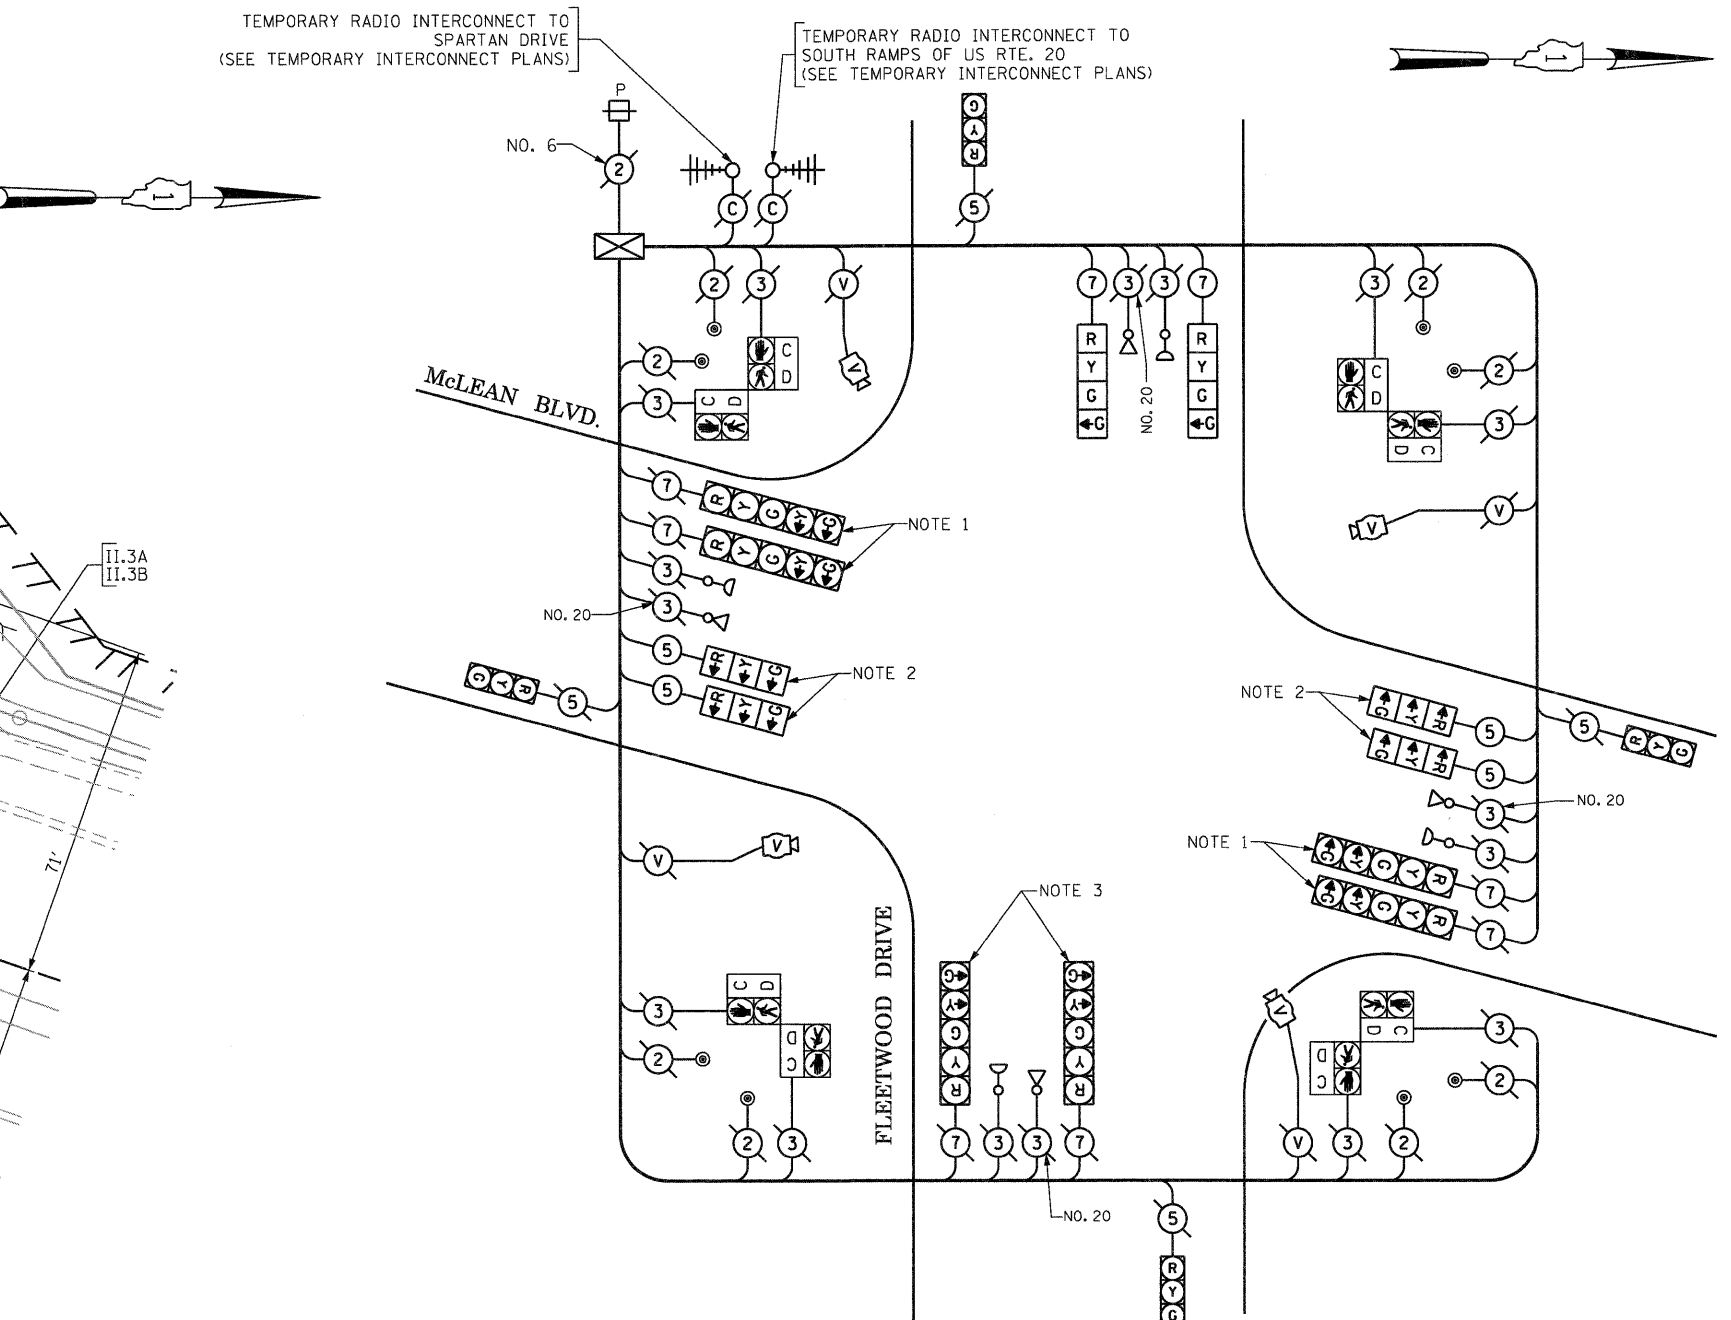

- NOTE 1: DURING CONSTRUCTION STAGES II.3A AND II.3B THE GREEN AND YELLOW LEFT ARROW INDICATION SECTIONS FOR THE NORTHBOUND AND SOUTHBOUND DIRECTION OF TRAFFIC SHALL BE BAGGED AND DISCONNECTED AT THE CONTROLLER. THEY SHALL BE UNBAGGED AND CONNECTED AT THE CONTROLLER AFTER CONSTRUCTION STAGE II.3B UNTIL PROPOSED TRAFFIC SIGNALS ARE MADE OPERATIONAL.
- NOTE 2: THESE SIGNAL HEADS WITH ALL ARROW INDICATIONS SHALL BE BAGGED AND DISCONNECTED AT THE CONTROLLER AFTER CONSTRUCTION STAGE II.3B.
- NOTE 3: THE YELLOW LEFT ARROW INDICATION SECTION IN THE 5-SECTION SIGNAL HEADS FOR THE EASTBOUND DIRECTION SHALL REMAIN BAGGED AND DISCONNECTED AT THE CONTROLLER THRU CONSTRUCTION STAGES II.3A AND II.3B.
- NOTE 4: ALL THE VIDEO DETECTION ZONES SHALL BE REDEFINED FOR EACH CONSTRUCTION STAGE. THE COST OF THIS WORK SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR "MODIFY TEMPORARY TRAFFIC SIGNAL INSTALLATION".

TEMPORARY CABLE PLAN
 (NOT TO SCALE)
 STAGES: II.3A AND II.3B

THE TRAFFIC SIGNAL CONTROL EQUIPMENT FOR THIS PROJECT SHALL BE "EAGLE" TO MATCH THE EXISTING ADJACENT SYSTEM.

STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION

TEMPORARY TRAFFIC SIGNAL PLAN AND TEMPORARY CABLE PLAN			
McLEAN BOULEVARD AT FLEETWOOD DRIVE			
STAGE II.3A AND STAGE II.3B (SHEET 6 OF 10)			
SCALE: 1"=20'	SHEET NO. OF SHEETS	STA. TO STA.	

F.A.P. RTE. 345	SECTION BR-R	COUNTY KANE	TOTAL SHEETS 794	SHEET NO. 398
CONTRACT NO. 60H45				
FED. ROAD DIST. NO. - ILLINOIS FED. AID PROJECT				