

**LEGEND**


- WORK AREA
- TEMPORARY CONCRETE BARRIER
- TEMPORARY IMPACT ATTENUATOR
- SIGN ON PORTABLE OR PERMANENT SUPPORT
- TYPE C BIDIRECTIONAL REFLECTOR (INCLUDED WITH THE COST FOR CONCRETE BARRIER)
- DRUM
- FLEXIBLE DELINEATOR
- RAISED REFLECTIVE PAVEMENT MARKER, TYPE 2
- TYPE III BARRICADE
- LIGHTS, TYPE A

**TRAFFIC CONTROL STANDARDS**  
701321, 701606, 701801

**STAGE II - TRAFFIC CONTROL ITEMS**

TEMPORARY PAVEMENT MARKING - LINE 5"	2781 FOOT
TEMPORARY PAVEMENT MARKING - LINE 12"	700 FOOT
WORK ZONE PAVEMENT MARKING REMOVAL	3481 FOOT
TEMPORARY CONCRETE BARRIER-RELOCATE	237.5 FOOT
TEMPORARY RAISED REFLECTIVE PAVEMENT MARKER	8 EACH
FLEXIBLE DELINEATORS	9 EACH
IMPACT ATTENUATORS (TEMPORARY)-RELOCATE	2 EACH

- STAGE II**
- WORK IN STAGE II SHALL CONSIST OF THE FOLLOWING:
1. REMOVAL OF STAGE I TEMPORARY PAVEMENT MARKINGS, FLEXIBLE DELINEATORS AND TEMPORARY RAISED MARKERS.
  2. RELOCATION AND INSTALLATION OF TEMPORARY CONCRETE BARRIER, ADVANCE WARNING SIGNS, BARRICADES AND TEMPORARY IMPACT ATTENUATORS AS SHOWN ON THE STAGE II TRAFFIC CONTROL PLAN.
  3. INSTALLATION OF TEMPORARY PAVEMENT MARKINGS, FLEXIBLE DELINEATORS AND RAISED PAVEMENT MARKINGS.
  4. REMOVAL OF THE WESTBOUND BRIDGE DECK, AND APPROACH PAVEMENTS.
  5. CONSTRUCTION OF THE NEW WESTBOUND SUPERSTRUCTURE AND APPROACH PAVEMENTS.
  6. REMOVAL OF ALL TEMPORARY MARKING AND INSTALLATION OF PERMANENT PAVEMENT MARKINGS.

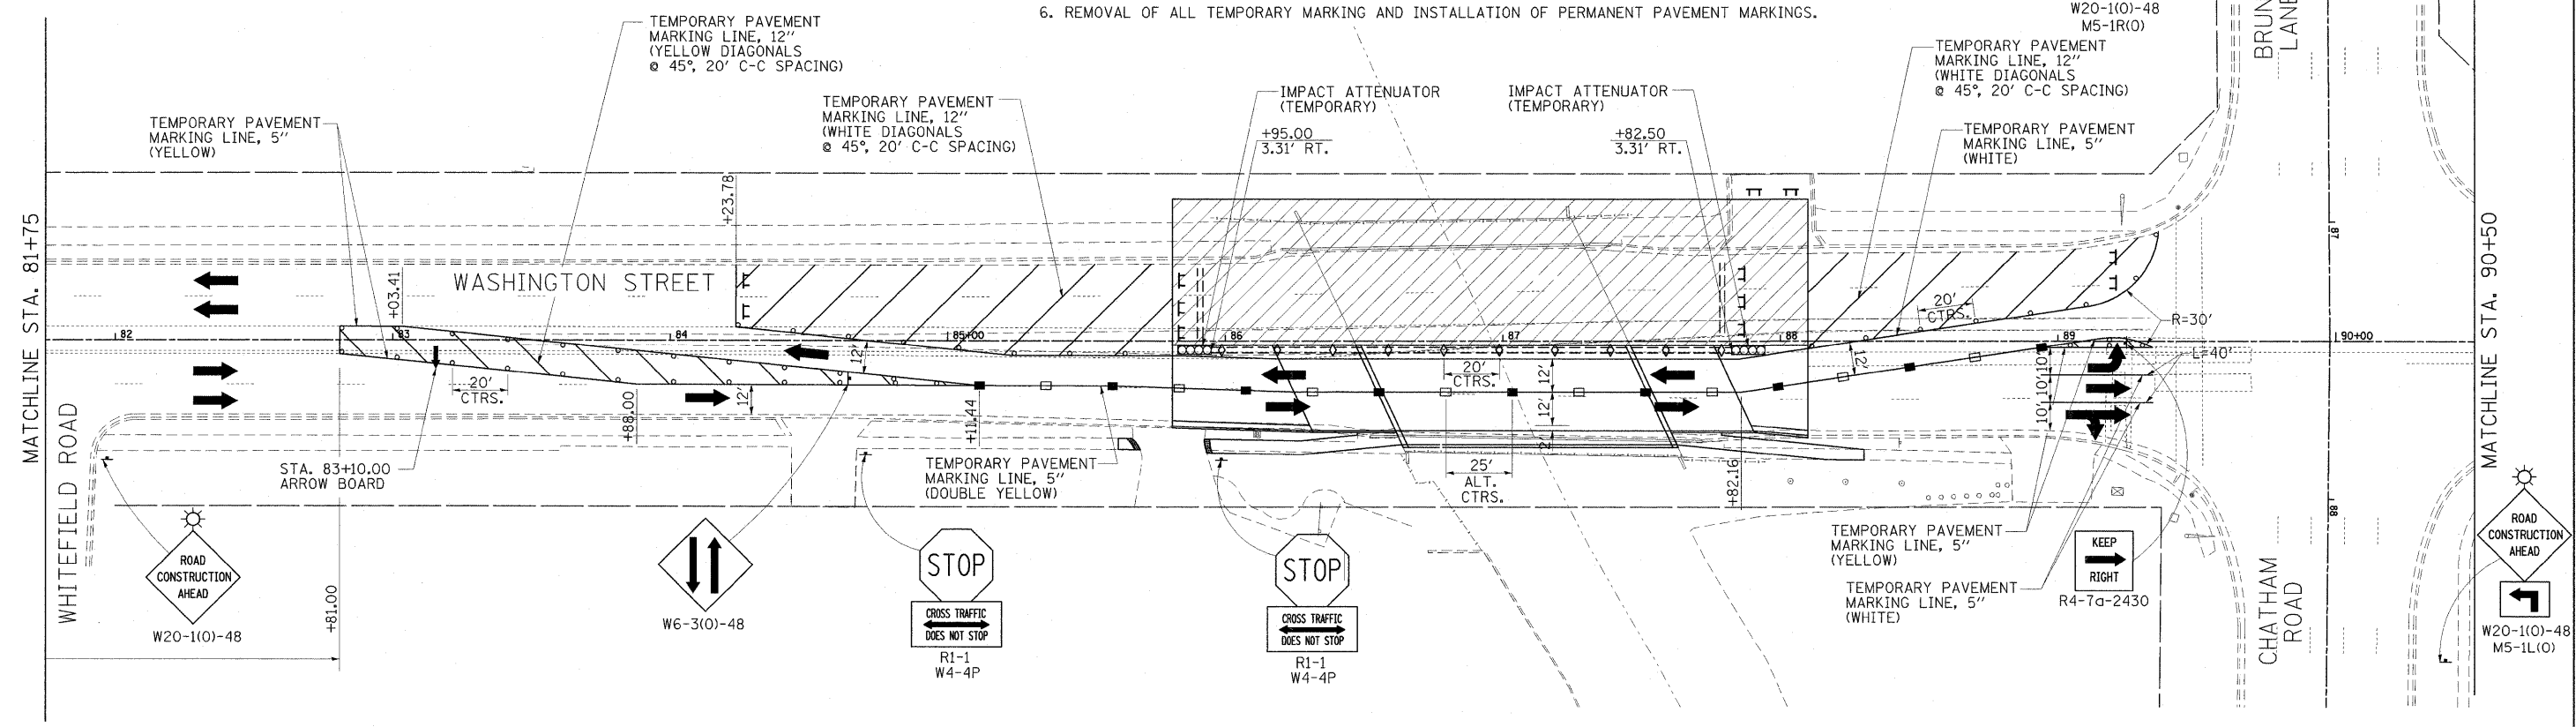

FILE NAME =  
...Sheets\MOT\_STG 2.SHT01.dgn

USER NAME = Brad Downen  
PLOT SCALE = 30.0000 / IN.  
PLOT DATE = 3/10/2009

DESIGNED - MJO  
DRAWN - GLD  
CHECKED - SPH  
DATE - 03/10/2009

REVISED -  
REVISED -  
REVISED -  
REVISED -

**CITY OF SPRINGFIELD  
SPRINGFIELD, ILLINOIS**

**MAINTENANCE OF TRAFFIC STAGE II  
S.N. 084-6001 (E)  
WASHINGTON STREET OVER JACKSONVILLE BRANCH**

F.A.U. RTE. 7977	SECTION 05-00443-00-BR	COUNTY SANGAMON	TOTAL SHEETS 28	SHEET NO. 8
FED. ROAD DIST. NO. 6 [ILLINOIS] FED. AID PROJECT			CONTRACT NO. 3485	