


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
669	11W-3,RS-8,*	TAZEWELL	442	98
STA.		TO STA. 1+22		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

• 11BR-1, 11BR-2

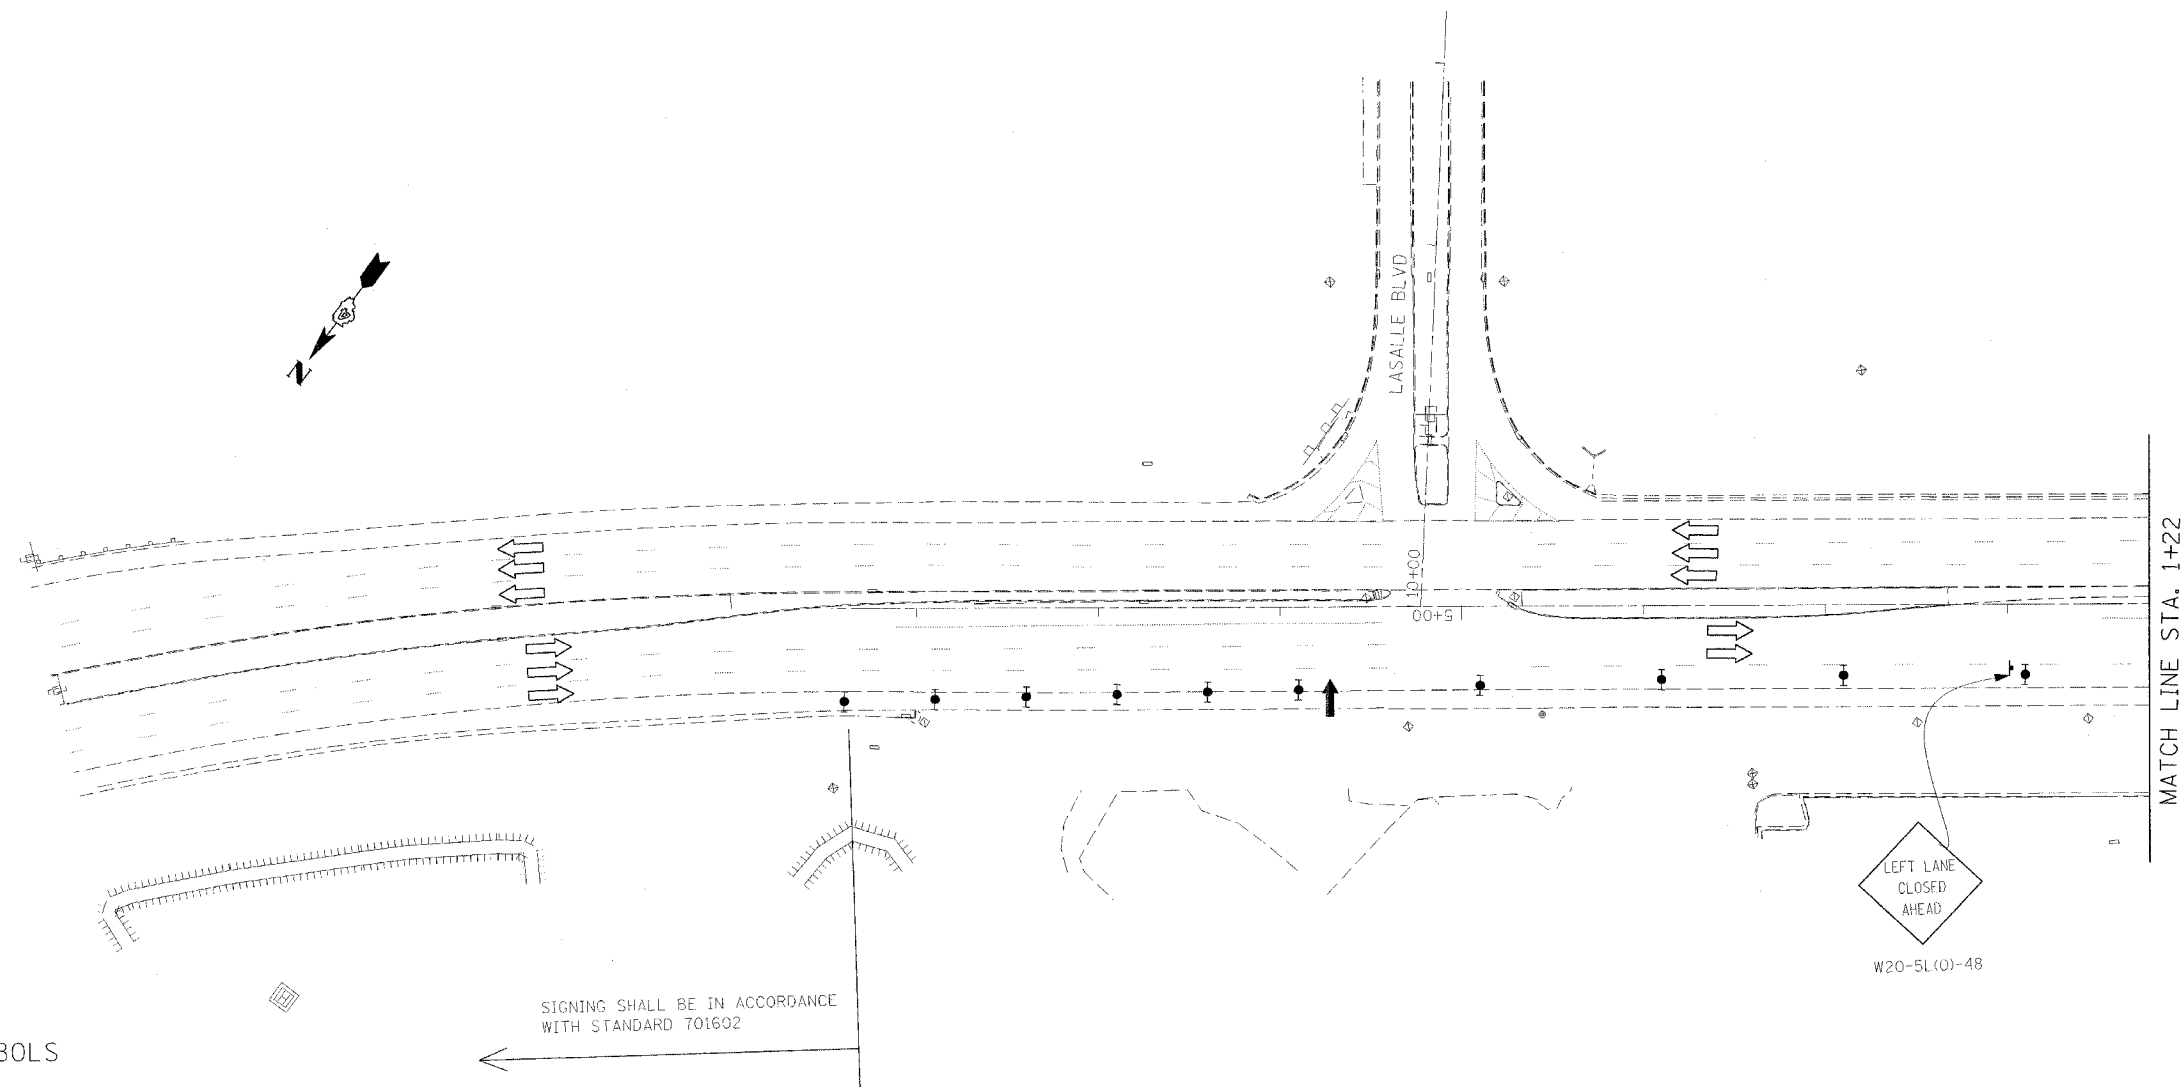

**SYMBOLS**


- Arrow board
- Work area
- Sign
- Direction indicator barricade with steady burn monodirectional light
- Drum with steady burn monodirectional light
- Type III barricade with flashing monodirectional lights
- Flexible delineator
- Type II barricade, drum, or vertical barricade with steady burn monodirectional light
- Traffic signal
- Induction loop detector (5'x5')
- Induction loop detector (6'x20')
- Vertical panel
- Flagger with traffic control sign

**CONSTRUCTION GENERAL NOTES**

1. PERFORM FULL AND PARTIAL DEPTH MEDIAN REMOVAL, AND FILL MEDIAN INLETS.
2. PLACE PCC BASE COURSE WIDENING (VARIABLE DEPTH) IN MEDIAN WHERE APPLICABLE AND INLAY MEDIAN WITH BIT CONC BINDER TO MATCH THE EXISTING SURFACE ELEVATION ON EACH SIDE OF THE MEDIAN.
3. PLACE TEMP PVMT MARKING ALONG MEDIAN AT THE END OF THE STAGE. SEE STAGE 1 STRIPING PLAN.

**TRAFFIC CONTROL GENERAL NOTES**

- ① CLOSE THE NB & SB PASSING LANES AND THE NB FAR OUTSIDE LANE FOR THE WORK IN CONSTRUCTION GENERAL NOTES STEPS 1-2 USING STANDARD 701602, EXCEPT AS SHOWN OTHERWISE. SIGNING AT SIDEROADS SHALL BE PLACED ACCORDING TO STANDARD 701602.
- ② A CHECK BARRICADE SHALL BE PLACED IN THE MIDDLE OF THE CLOSED LANE AT 1000' CENTERS.
- ③ USE STANDARD 701426 FOR THE CONSTRUCTION GENERAL NOTES STEP 3.



REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION  
 IL RTE 29  
 WESLEY RD TO IL RTE 98  
 SUGGESTED STAGES OF CONSTRUCTION  
 AND TRAFFIC CONTROL  
 STAGE 1A

SCALE: VERT. \_\_\_\_\_  
 HORIZ. \_\_\_\_\_  
 DATE \_\_\_\_\_

DRAWN BY \_\_\_\_\_  
 CHECKED BY \_\_\_\_\_