


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
669	11W-3,RS-8,*	TAZEWELL	442	105
STA. 286+00		TO STA. 299+00		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	

• 11BR-1, 11BR-2

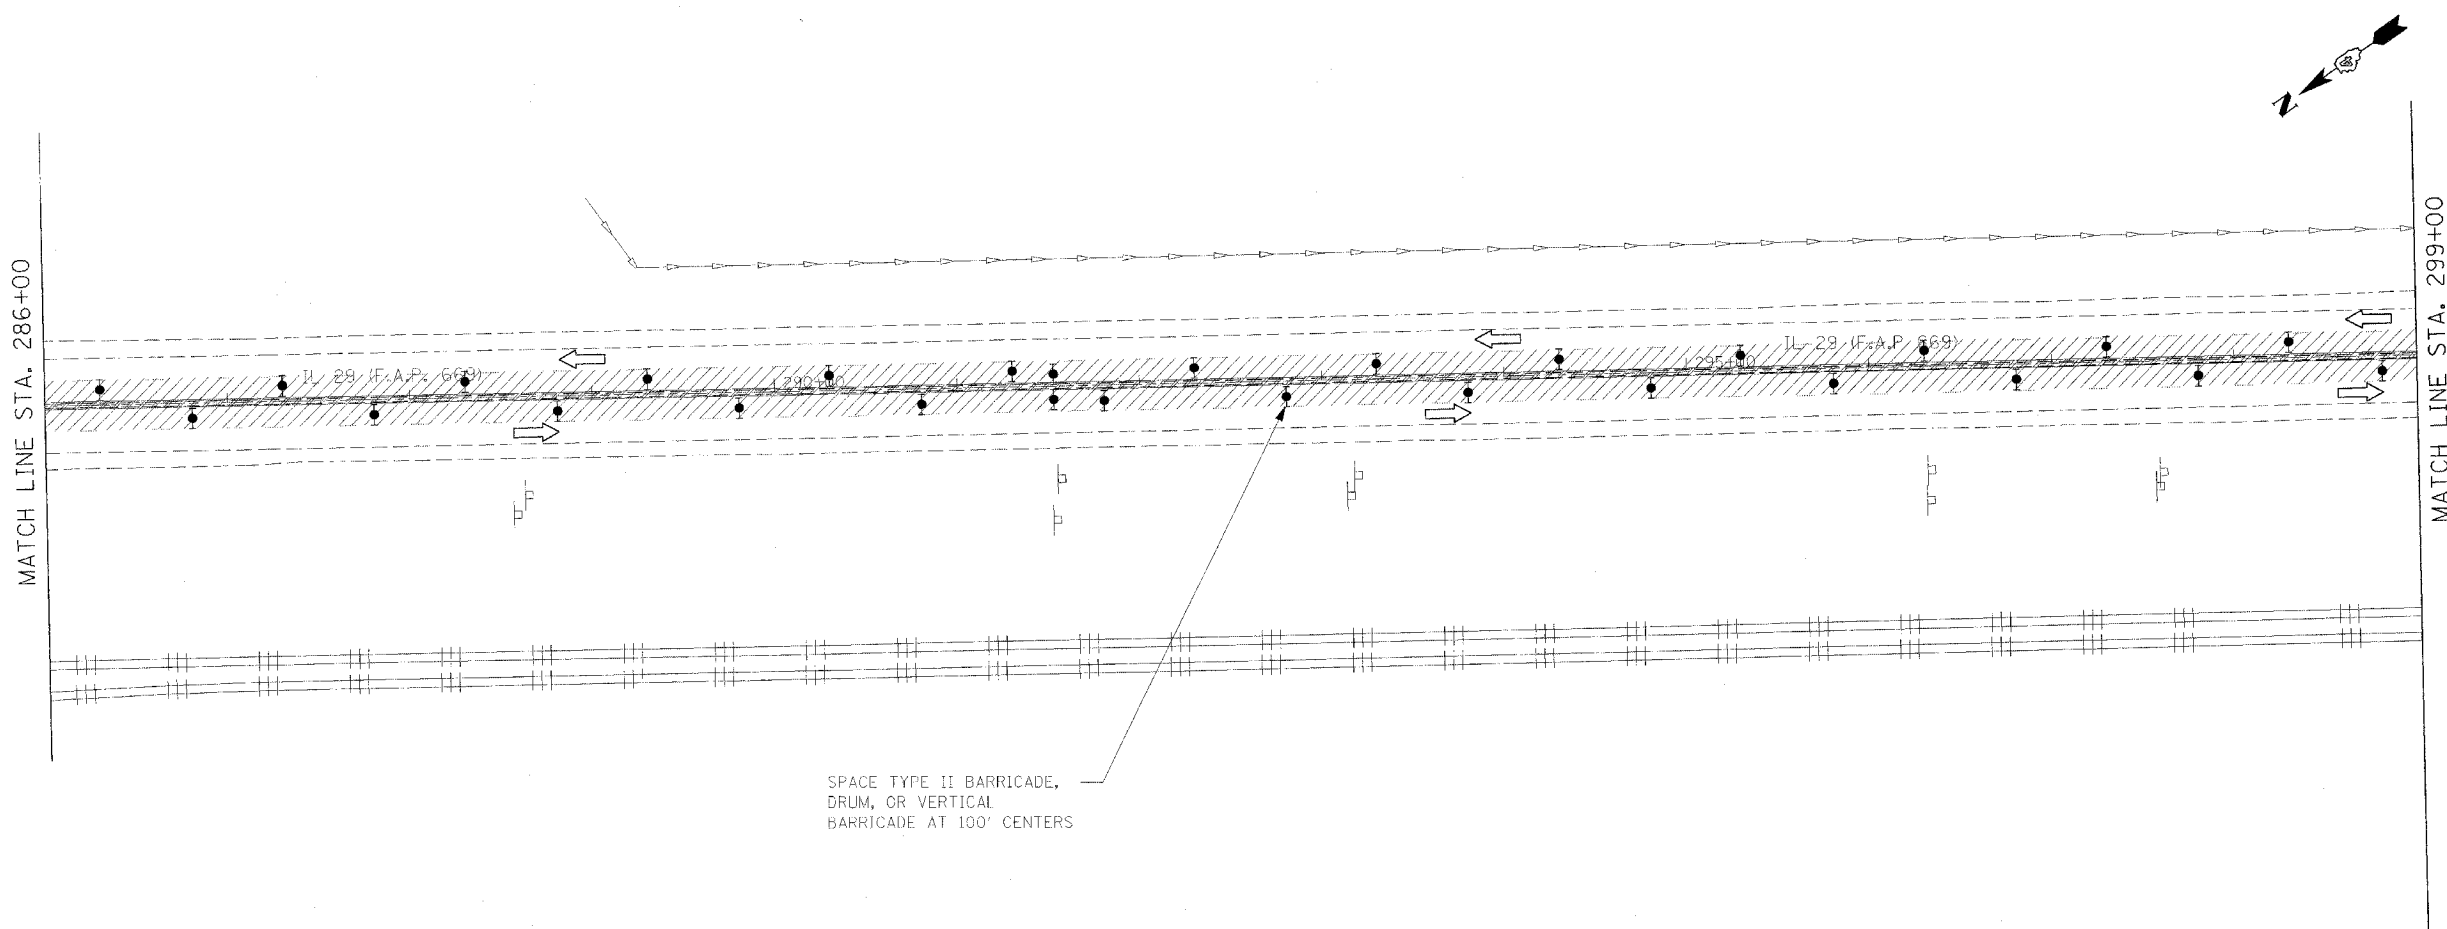

SPACE TYPE II BARRICADE, DRUM, OR VERTICAL BARRICADE AT 100' CENTERS

SYMBOLS

- Arrow board
- Work area
- Sign
- Direction indicator barricade with steady burn monodirectional light
- Type II barricade, drum, or vertical barricade
- Type II barricade, drum, or vertical barricade with steady burn monodirectional light
- Flagger with traffic control sign

CONSTRUCTION GENERAL NOTES

1. PERFORM FULL AND PARTIAL DEPTH MEDIAN REMOVAL, AND FILL MEDIAN INLETS.
2. PLACE PCC BASE COURSE WIDENING (VARIABLE DEPTH) IN MEDIAN WHERE APPLICABLE AND INLAY MEDIAN WITH BIT CONC BINDER TO MATCH THE EXISTING SURFACE ELEVATION ON EACH SIDE OF THE MEDIAN.
3. CONSTRUCT PROPOSED MEDIAN IL 29 STA. 333+00 TO STA. 334+00.
4. PLACE TEMP PVMT MARKING ALONG MEDIAN AT THE END OF THE STAGE. SEE STAGE 1 STRIPING PLAN.

TRAFFIC CONTROL GENERAL NOTES

- ① CLOSE THE NB & SB PASSING LANES FOR CONSTRUCTION OF THE CONSTRUCTION GENERAL NOTES STEPS 1 - 3 USING STANDARD 701422. STRIPE ACCORDING TO STANDARD 701422. SIGNING AT SIDEROADS SHALL BE PLACED ACCORDING TO STANDARD 701602.
- ② A CHECK BARRICADE SHALL BE PLACED IN THE MIDDLE OF THE CLOSED LANE AT 1000' CENTERS.
- ③ USE STANDARD 701426 FOR THE CONSTRUCTION GENERAL NOTES STEP 4.



REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
 IL RTE 29
 WESLEY RD TO IL RTE 98
 SUGGESTED STAGES OF CONSTRUCTION
 AND TRAFFIC CONTROL
 STAGE 1B
 SCALE: VERT. _____
 HORIZ. _____
 DATE _____
 DRAWN BY _____
 CHECKED BY _____

PLOT DATE = 4/18/2006
 FILE NAME = c:\puro\secta\99\papak\phase-11\stage1b.dgn
 PLOT SCALE = 1"=50'-0" / M.
 REFERENCE = 89EFS