




EROSION CONTROL LEGEND

-  TEMPORARY EROSION CONTROL SEEDING AND TEMPORARY MULCH
-  TEMPORARY DITCH CHECK
-  PERIMETER EROSION BARRIER

NOTES:

1. THE CONSTRUCTION LIMITS WILL BE STAKED BY THE CONTRACTOR PRIOR TO COMMENCING CONSTRUCTION. THE CONSTRUCTION LIMITS MAY BE ADJUSTED BY THE ENGINEER TO PRESERVE TREES AND NO ADDITIONAL COMPENSATION WILL BE PAID TO THE CONTRACTOR FOR CHANGED CONSTRUCTION LIMITS.
2. TEMPORARY EROSION CONTROLS SHALL BE INSTALLED BEFORE ANY SOIL-DISTURBING ACTIVITIES.
3. THIS EROSION CONTROL PLAN MAY BE CHANGED AND UPDATED ACCORDING TO OBSERVED FIELD PERFORMANCE OF THE OF THE EROSION CONTROL MEASURES. IF CHANGES ARE MADE, AN UPDATED EROSION CONTROL PLAN SHALL BE COMPILED.
4. TEMPORARY EROSION CONTROLS SHALL NOT BE PAID FOR UNLESS THEY ARE PROPERLY INSTALLED AND MAINTAINED.
5. TEMPORARY EROSION CONTROL SEEDING SHALL BE APPLIED EVERY SEVEN (7) DAYS, AT A RATE OF 100 LB. PER ACRE, ACCORDING TO ARTICLE 280.04(F) OF THE STANDARD SPECIFICATIONS FOR BRIDGE AND ROAD CONSTRUCTION (ADOPTED JANUARY 1, 2002).
6. ONCE PERMANENT EROSION CONTROLS AS PROPOSED IN THE PLANS ARE FUNCTIONAL AND ESTABLISHED, TEMPORARY EROSION CONTROL ITEMS SHALL BE REMOVED, THE AREA CLEANED UP AND DISTURBED TURF RESEDED. THE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT BID PRICE FOR THE VARIOUS TEMPORARY EROSION CONTROL PAY ITEMS.

PERIMETER EROSION BARRIER


| LOCATION | FEET |
|-------------------------------------|-------------|
| STA. 217+66.07 LT. TO 219+27.50 LT. | 240 |
| STA. 217+66.07 RT. TO 219+34.00 RT. | 210 |
| STA. 220+70.00 LT. TO 223+36.11 LT. | 330 |
| STA. 220+63.25 RT. TO 223+36.11 RT. | 330 |
| TOTAL | 1110 |

TEMPORARY DITCH CHECKS

| LOCATION | EACH |
|----------------------|-----------|
| STA. 217+72 LT.& RT. | 1,1 |
| STA. 217+80 LT.& RT. | 1,1 |
| STA. 217+88 LT.& RT. | 1,1 |
| STA. 217+96 LT.& RT. | 1,1 |
| STA. 218+09 LT.& RT. | 1,1 |
| STA. 218+22 LT.& RT. | 1,1 |
| STA. 218+35 LT.& RT. | 1,1 |
| STA. 218+48 LT.& RT. | 1,1 |
| STA. 218+61 LT.& RT. | 1,1 |
| STA. 218+74 LT.& RT. | 1,1 |
| STA. 218+87 LT.& RT. | 1,1 |
| STA. 219+00 LT.& RT. | 1,1 |
| STA. 219+13 LT.& RT. | 1,1 |
| STA. 219+26 LT.& RT. | 1,1 |
| STA. 220+70 LT.& RT. | 1,1 |
| STA. 220+85 LT.& RT. | 1,1 |
| STA. 221+00 LT.& RT. | 1,1 |
| STA. 221+15 LT.& RT. | 1,1 |
| STA. 221+30 LT.& RT. | 1,1 |
| STA. 221+45 LT.& RT. | 1,1 |
| STA. 221+60 LT.& RT. | 1,1 |
| STA. 221+75 LT.& RT. | 1,1 |
| SUBTOTAL | 44 |

TEMPORARY DITCH CHECKS

| LOCATION | EACH |
|----------------------|-----------|
| STA. 221+90 LT.& RT. | 1,1 |
| STA. 222+05 LT.& RT. | 1,1 |
| STA. 222+20 LT.& RT. | 1,1 |
| STA. 222+35 LT.& RT. | 1,1 |
| STA. 222+50 LT.& RT. | 1,1 |
| STA. 222+65 LT.& RT. | 1,1 |
| STA. 222+80 LT.& RT. | 1,1 |
| STA. 222+95 LT.& RT. | 1,1 |
| STA. 223+10 LT.& RT. | 1,1 |
| STA. 223+25 LT.& RT. | 1,1 |
| SUBTOTAL | 20 |
| TOTAL | 64 |

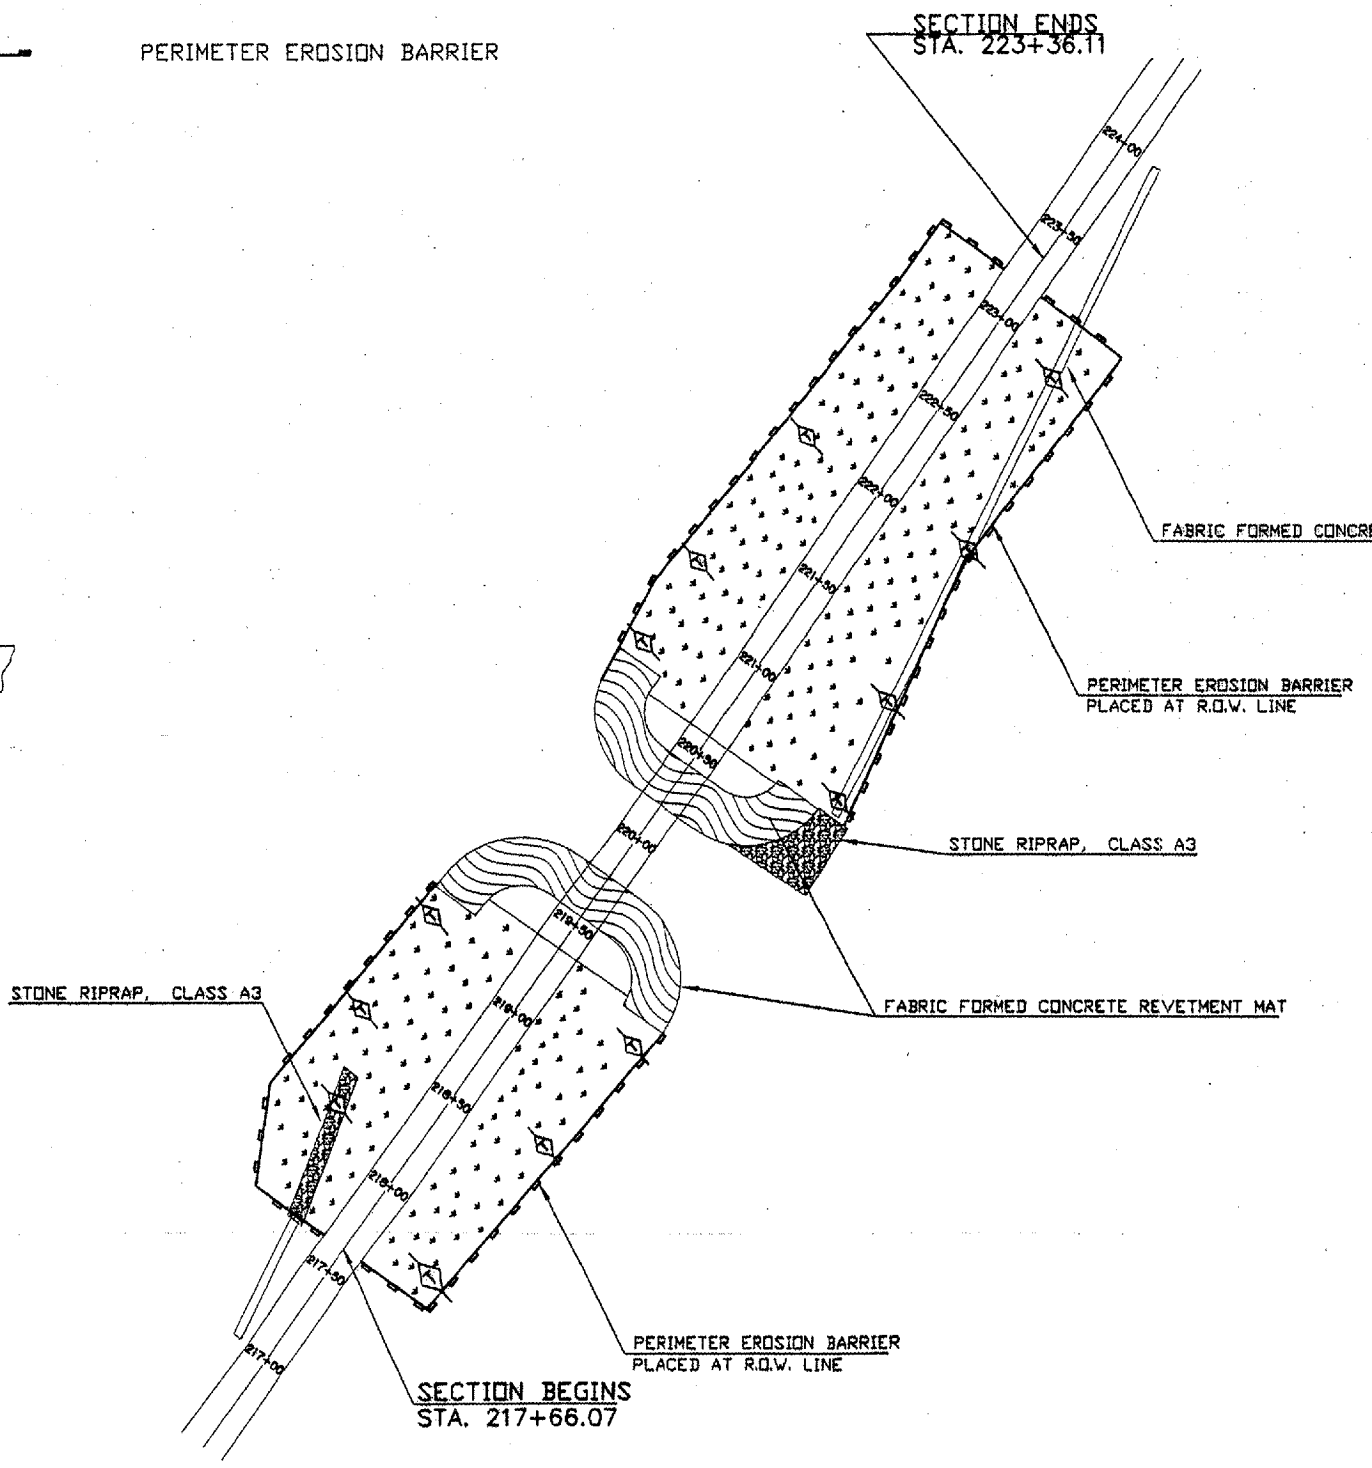

EROSION CONTROL PLAN

filename:swppp