ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAS 929	01-00056-00-RS	JOHNSON	27	1
PROJECT NO. SR-929(119)		CONTRACT NO. 99164		

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

PLANS FOR PROPOSED

SURFACE TRANSPORTATION PROGRAM

FAS ROUTE 929
SECTION 01-00056-00-RS
PROJECT NO: SR-929(119)
JOB NO: C-99-040-02

JOHNSON COUNTY



MATTHEW L. BARNETT
PROFESSIONAL ENGINEER
STATE OF ILLINOIS

SIGNATURE
11/30/05
LIC. EXP. DATE

SUMMARY OF QUANTITIES

I000-2A

CODE NO.	PAY ITEM	UNIT	TOTAL
X4066416	BITUMINOUS CONCRETE SURFACE COURSE, SUPERPAVE, MIX "C", N70	TON	4,732
X4066616	BITUMINOUS CONCRETE BINDER COURSE, SUPERPAVE, IL-19.0, N70	TON	8,081
20200500	EARTH EXCAVATION (WIDENING)	CU YD	276
28100807	STONE DUMPED RIPRAP, CLASS A4	TON	40
35101400	AGGREGATE BASE COURSE, TYPE B	TON	350
40200800	AGGREGATE SURFACE COURSE, TYPE B	TON	200
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GAL	1553
40600300	AGGREGATE (PRIME COAT)	TON	30
44003510	MEDIAN REMOVAL PARTIAL DEPTH	SQ FT	116
48101200	AGGREGATE SHOULDERS, TYPE B	TON	6,000
54390090	INSERTION CULVERT LINER 12"	FOOT	53
54390210	INSERTION CULVERT LINER 30"	FOOT	148
54390230	INSERTION CULVERT LINER 36"	FOOT	80
72000100	SIGN PANEL - TYPE 1	SQ FT	203
72800100	TELESCOPING STEEL SIGN SUPPORT	FOOT	673
78001110	PAINT PAVEMENT MARKING - LINE 4"	FOOT	73,320
78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	490

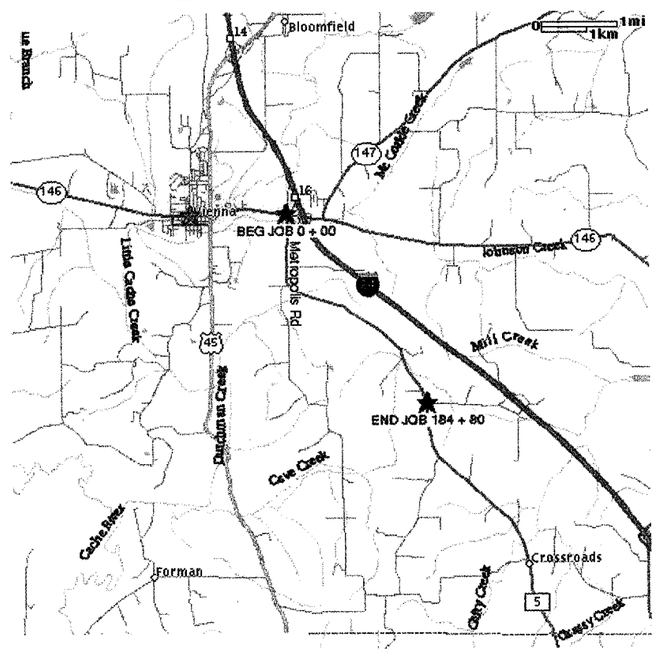

LOCATION MAP

SCALE 1" = 2 MILES

NET LENGTH OF IMPROVEMENT = 18,480.00 FT. = 3.5 0 MILES

INDEX OF SHEETS

1. COVER SHEET
2. TYPICAL SECTIONS
3-10 PLAN & PROFILE
11. INTERSECTION DETAIL
12. TYPICAL ENTRANCE & SIDE ROAD DETAILS
13. MISCELLANEOUS DETAILS
14-25 CROSS SECTIONS
26. PAINT DETAIL
27. BRIDGE DETAIL

STANDARDS

701006-01, 701011-01, 701301-02, 701306-01, 701502-01
701311-02, 701502, 701001-01, 701422-01 TRAFFIC CONTROL
720001 SIGN PANEL MOUNTING DETAILS
720006 SIGN PANEL ERECTION DETAILS
780001-01 TYPICAL PAVEMENT MARKINGS
781001-02 RAISED REFLECTIVE PAVEMENT MARKERS
BLR-24-1 MAILBOX TURNOUT

CLASSIFICATION: LOCAL ROAD
ADT: STA. 0+00 - 4+00 = 2750
STA. 4+00 - 184+80 = 710
DESIGN SPEED: 50

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED 4-5-05
LOCAL AGENCY REPRESENTATIVE

PASSED 4/8/05
ENGINEER OF LOCAL ROADS AND STREETS

APPROVED April 11, 2005
MARY C. LAMIE, P.E.
DEPUTY DIRECTOR OF HIGHWAYS
REGION FIVE ENGINEER

J.U.L.I.E. 1-800-892-0123

CONTRACT NO. 99164

(PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS)

SHAWNEE SURVEY & CONSULTING, INC
PHONE: (618) 658-6065 FAX: (618) 658-9190
P.O. BOX 125
104 S. FOURTH STREET
VIENNA, IL 62995
PLSF NO.: 048-000151 PDF NO.: 104-02344

JOHNSON COUNTY HIGHWAY DEPARTMENT
P.O. BOX 247
VIENNA, IL 62995

OLD METROPOLIS ROAD RESURFACING PROJECT
FAS ROUTE 929, CH5
SECTION 01-00056-00-RS

FUNDING OR PROJECT NUMBER

DRAWING INFORMATION
DRAWN BY: P. RUZICH ■ PRELIMINARY
DATE: ☐ BID / CONSTRUCTION
CHECKED BY: KDM
SCALE: 1" = 2 MILES ☐ FINAL / RECORD
JOB NO.: 2001-134

DRAWING REVISIONS

REV.	DATE	REVISIONS
1	01/23/02	
1	08/12/02	
2	12/13/04	
3	1/14/05	

SHEET NUMBER

COVER