







EROSION CONTROL PLAN & STORMWATER POLLUTION PREVENTION PLAN

THIS PROJECT DISTURBS 0.73 ACRES OF TOTAL LAND AREA. COMPLIANCE WITH THE NATIONAL POLLUTION DISCHARGE ELIMINATION SYSTEM (NPDES) STORMWATER PERMIT IS NECESSARY IF A PROJECT DISTURBS 1 OR MORE ACRES OF TOTAL LAND AREA; AN NPDES STORMWATER PERMIT WILL NOT BE REQUIRED FOR THIS PROJECT.


F.A.J.U. RTE. 2661	SECTION 00-00095-1-BR	COUNTY LAKE	TOTAL SHEETS 28	SHEET NO. 7
EROSION AND SEDIMENT CONTROL PLAN				
C-9-69-00	ILLINOIS	CONTRACT NO. 83789		

LEGEND

-  EXISTING DITCH LINE
-  PROPOSED DITCH LINE
-  SILT FENCE
-  TEMPORARY DITCH CHECKS
-  SEEDING CLASS 2A
-  SEEDING CLASS 3


**PROJECT BEGINS
STA. 113+31.22**

**PROJECT ENDS
STA. 119+50.00**

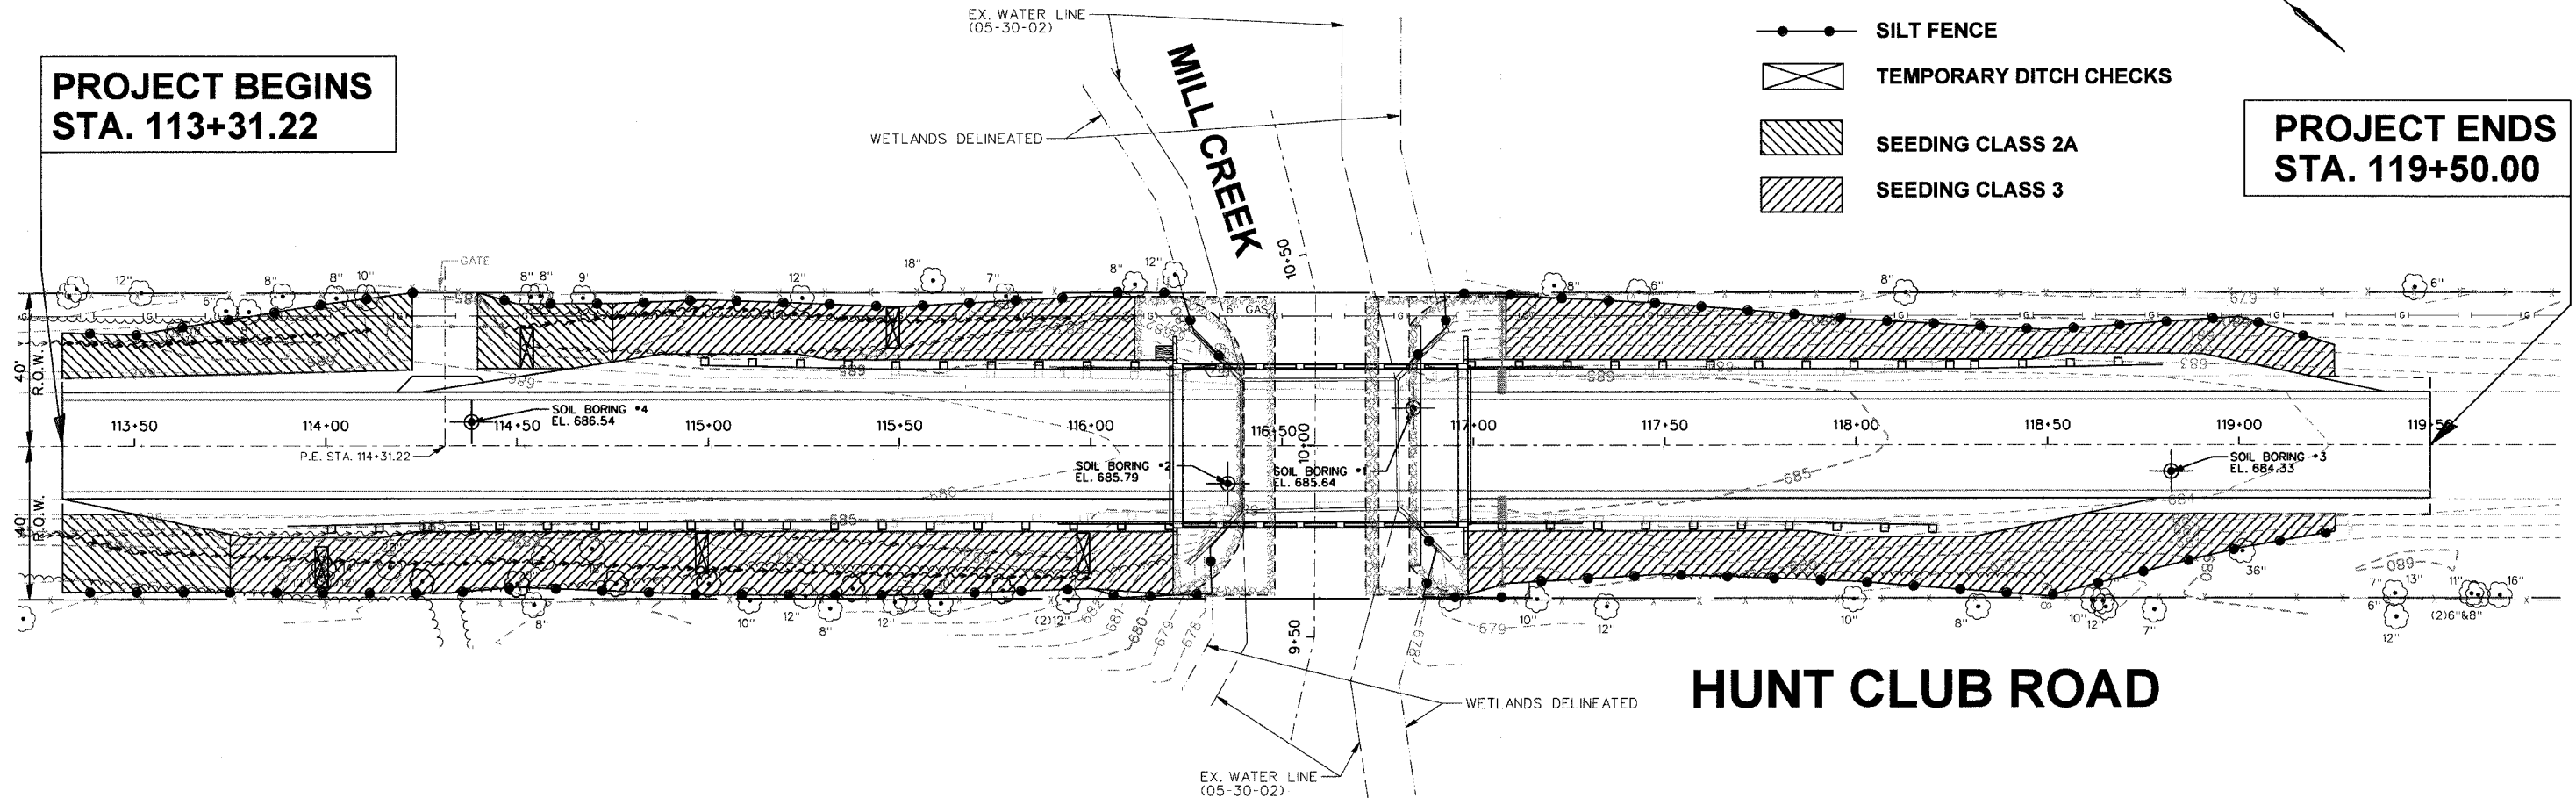

HUNT CLUB ROAD

DRAINAGE BASINS OF LAKE COUNTY

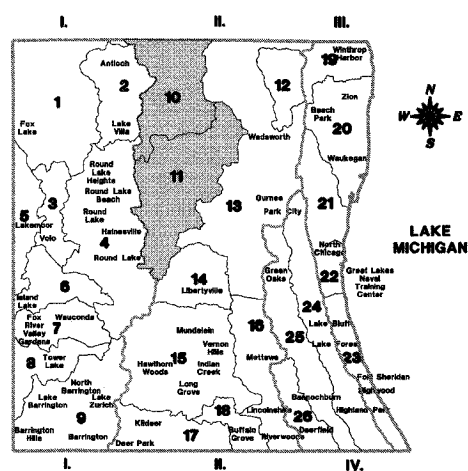

- I. FOX RIVER WATERSHED**
 - 1. Upper Fox River
 - 2. Sequoit Creek
 - 3. Fish Lake Drain
 - 4. Squaw Creek
 - 5. Lower Fox River
 - 6. Mutton Creek
 - 7. Slossum Lake Drain
 - 8. Tower Lake Drain
 - 9. Flint Creek
- II. DES PLAINES RIVER WATERSHED**
 - 10. North Mill Creek
 - 11. Mill Creek
 - 12. Newport Drainage Ditch
 - 13. Upper Des Plaines River
 - 14. Bull Creek
 - 15. Indian Creek
 - 16. Lower Des Plaines River
 - 17. Buffalo Creek
 - 18. Apaklake Creek
 - 19. Kellogg Creek
 - 20. Dead River
 - 21. Waukagan River
 - 22. Peitbone Creek
- III. LAKE MICHIGAN WATERSHED**
 - 23. Buff/Revere
 - 24. Skokie River
 - 25. Middle Fork
 - 26. West Fork
- IV. CHICAGO RIVER WATERSHED**
 - 27. ...
 - 28. ...
 - 29. ...
 - 30. ...
 - 31. ...
 - 32. ...
 - 33. ...

GENERAL NOTES FOR EROSION CONTROL

- A. SOIL DISTURBANCE SHALL BE CONDUCTED IN SUCH A MANNER AS TO MINIMIZE EROSION. SOIL STABILIZATION MEASURES SHALL CONSIDER THE TIME OF YEAR, SITE CONDITIONS AND THE USE OF TEMPORARY OR PERMANENT MEASURES.
 - B. SOIL EROSION AND SEDIMENT CONTROL FEATURES SHALL BE CONSTRUCTED PRIOR TO THE COMMENCEMENT OF HYDROLOGIC DISTURBANCE OF UPLAND AREAS.
 - C. DISTURBED AREAS SHALL BE STABILIZED WITH TEMPORARY OR PERMANENT MEASURES WITHIN 14 CALENDAR DAYS OF THE END OF ACTIVE HYDROLOGIC DISTURBANCE, OR REDISTURBANCE.
 - D. AREAS OR EMBANKMENTS HAVING SLOPES GREATER THAN OR EQUAL TO 3:1H/V, AND APPROVED BY THE ENFORCEMENT OFFICER, SHALL BE STABILIZED WITH SOO, MAT, BLANKET OR FABRIC IN COMBINATION WITH SEEDING.
 - E. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN 30 DAYS AFTER FINAL SITE STABILIZATION IS ACHIEVED OR AFTER THE TEMPORARY MEASURES ARE NO LONGER NEEDED.
 - F. ALL TEMPORARY AND PERMANENT EROSION CONTROL MEASURES MUST BE MAINTAINED AND REPAIRED AS NEEDED. THE PROPERTY OWNER SHALL BE ULTIMATELY RESPONSIBLE FOR MAINTENANCE AND REPAIR.
 - G. A STABILIZED MAT OF AGGREGATE UNDERLAIN WITH FILTER CLOTH (OR OTHER APPROPRIATE MEASURE) SHALL BE LOCATED AT ANY POINT WHERE TRAFFIC WILL BE ENTERING OR LEAVING A CONSTRUCTION SITE TO OR FROM A PUBLIC RIGHT-OF-WAY, STREET, ALLEY OR PARKING AREA. ANY SEDIMENT OR SOIL REACHING AN IMPROVED PUBLIC RIGHT-OF-WAY, STREET, ALLEY OR PARKING AREA SHALL BE REMOVED BY SCRAPING OR STREET CLEANING AS ACCUMULATIONS WARRANT AND TRANSPORTED TO A CONTROLLED SEDIMENT DISPOSAL AREA.
 - H. SOIL STOCKPILES SHALL NOT BE LOCATED IN A FLOOD PRONE AREA OR A DESIGNATED BUFFER PROTECTING WATERS OF THE UNITED STATES OR ISOLATED WATERS OF LAKE COUNTY.
 - I. IF DEWATERING SERVICES ARE USED, ADJOINING PROPERTIES AND DISCHARGE LOCATIONS SHALL BE PROTECTED FROM EROSION. DISCHARGES SHALL BE ROUTED THROUGH AN EFFECTIVE SEDIMENT CONTROL MEASURE (e.g. SEDIMENT TRAP, SEDIMENT BASIN, OR OTHER APPROPRIATE MEASURE).
 - J. THE EROSION CONTROL MEASURES INDICATED ON THE PLANS ARE THE MINIMUM REQUIREMENTS. ADDITIONAL MEASURES MAY BE REQUIRED, AS DIRECTED BY THE ENGINEER OR GOVERNING AGENCY.
 - K. PERIMETER EROSION BARRIER SHALL BE INSTALLED AT LOCATIONS SPECIFIED IN THE PLANS AT 1 FOOT OR MORE OUTSIDE THE TOE OF SLOPE OR INSIDE THE RIGHT-OF-WAY WHICHEVER IS CLOSER TO THE CENTERLINE, OR AS DIRECTED BY THE ENGINEER PRIOR TO THE START OF ANY EARTHWORK, CULVERT, OR STORM SEWER CONSTRUCTION.
 - L. THE PERIMETER EROSION BARRIER SHALL REMAIN IN PLACE UNTIL ALL DISTURBED AREAS HAVE BEEN STABILIZED WITH VEGETATION. AT THIS TIME, THE PERIMETER EROSION BARRIER SHALL BE REMOVED AND THE AREAS DAMAGED BY THE FENCE INSTALLATION RESTORED.
 - M. THE INSTALLATION, REMOVAL AND THE RESTORATION OF THE AREA DISTURBED BY THE PERIMETER EROSION BARRIER IS INCLUDED IN THE PAY ITEM PERIMETER EROSION BARRIER.
 - N. THE DITCH CHECKS, SPECIAL SHALL BE INSTALLED AS SHOWN ON THE SPECIAL DETAIL LC1005 AS GRADING PROGRESSES THROUGH THE PROJECT.
 - O. UNLESS OTHERWISE DESIGNATED, ALL RESTORATION AREAS SHALL BE SEEDDED WITH CLASS 4A AND COVERED WITH EROSION CONTROL BLANKET.
- APPLICABLE STANDARDS, SPECIFICATIONS, AND SPECIAL PROVISIONS FOR EROSION AND SEDIMENT CONTROL
- SPECIAL PROVISION FOR TEMPORARY DITCH CHECK
SPECIAL PROVISION FOR PERIMETER EROSION BARRIER
SPECIAL PROVISION FOR EROSION CONTROL FABRIC
SPECIAL PROVISION FOR SEEDING
DOT HIGHWAY STANDARD 28000
LCDDT STANDARD DETAIL LC1005

SEQUENCE OF EROSION CONTROL OPERATIONS

1. INSTALL PERIMETER EROSION BARRIER AND WETLAND PROTECTION BARRIERS AT LOCATIONS SPECIFIED IN THE PLANS PRIOR TO THE START OF ANY EARTHWORK.
2. BEGIN CONSTRUCTION AND INSTALL TEMPORARY DITCH CHECKS AS WORK PROGRESSES.
3. PLACE SOO AT THE SIDE SLOPES OF THE CREEK AS SHOWN TO ELIMINATE THE EROSION AT THESE AREAS.
4. THE TEMPORARY DITCH CHECKS ARE TO REMAIN IN PLACE UNTIL THE AREA IS STABILIZED WITH SEEDING AND BLANKET.
5. SEEDING SHALL BE COMPLETED IN STAGES AS SECTIONS OF THE CONSTRUCTION ARE COMPLETED AS DEFINED IN THE SPECIAL PROVISIONS OR WHEN THE CONSTRUCTION WILL BE SHUT DOWN FOR THE SEASON. ALSO ANY STOCKPILES OF DIRT TO BE USED IN THE NEXT SEASON SHALL BE SEEDDED WITH TEMPORARY SEED AND MULCHED.
6. WHEN THE PROJECT HAS BEEN STABILIZED WITH VEGETATION THE PERIMETER EROSION BARRIER SHALL BE REMOVED AND THE AREAS DAMAGED BY THE FENCE INSTALLATION RESTORED.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
EROSION AND SEDIMENT CONTROL PLAN

SCALE: VERT. 1" = 20'
HORIZ. 1" = 20'

DRAWN BY AJP
CHECKED BY CRF