
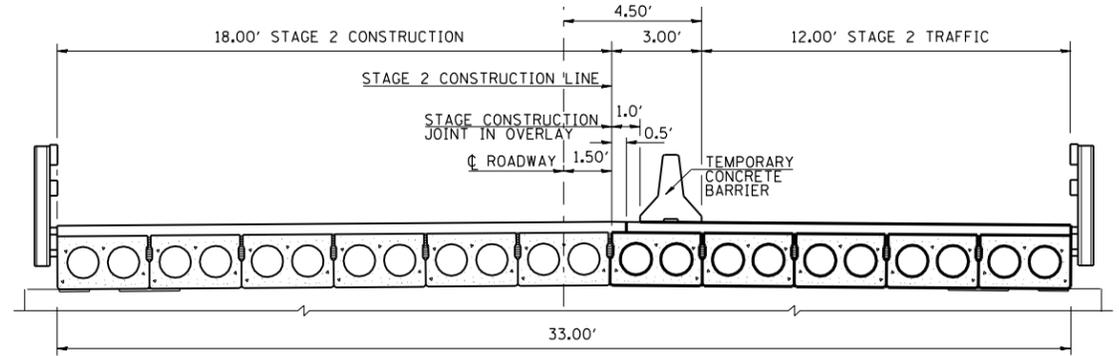


F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
7825	(K-15D)BR	ADAMS	31	13
STA. 129+40.00		TO STA. 135+80.00		
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	


**LEGEND**

-  WORK AREA
-  SIGN
-  TYPE III BARRICADE
-  DRUM WITH STEADY BURNING LIGHT
-  TRAFFIC SIGNAL
-  TYPE C BIDIRECTIONAL REFLECTOR
-  TEMPORARY CONCRETE BARRIER (STD 704001)
-  IMPACT ATTENUATOR
-  STEADY BURNING LIGHTS AND DOUBLE VERTICAL PANELS
-  DOUBLE VERTICAL PANEL

**TEMPORARY SIGNAL PHASE DIAGRAM**

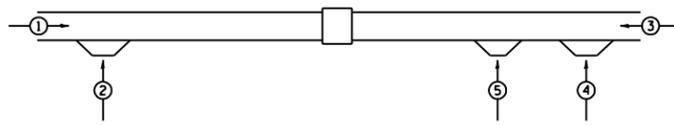

**STAGE 2 CONSTRUCTION**

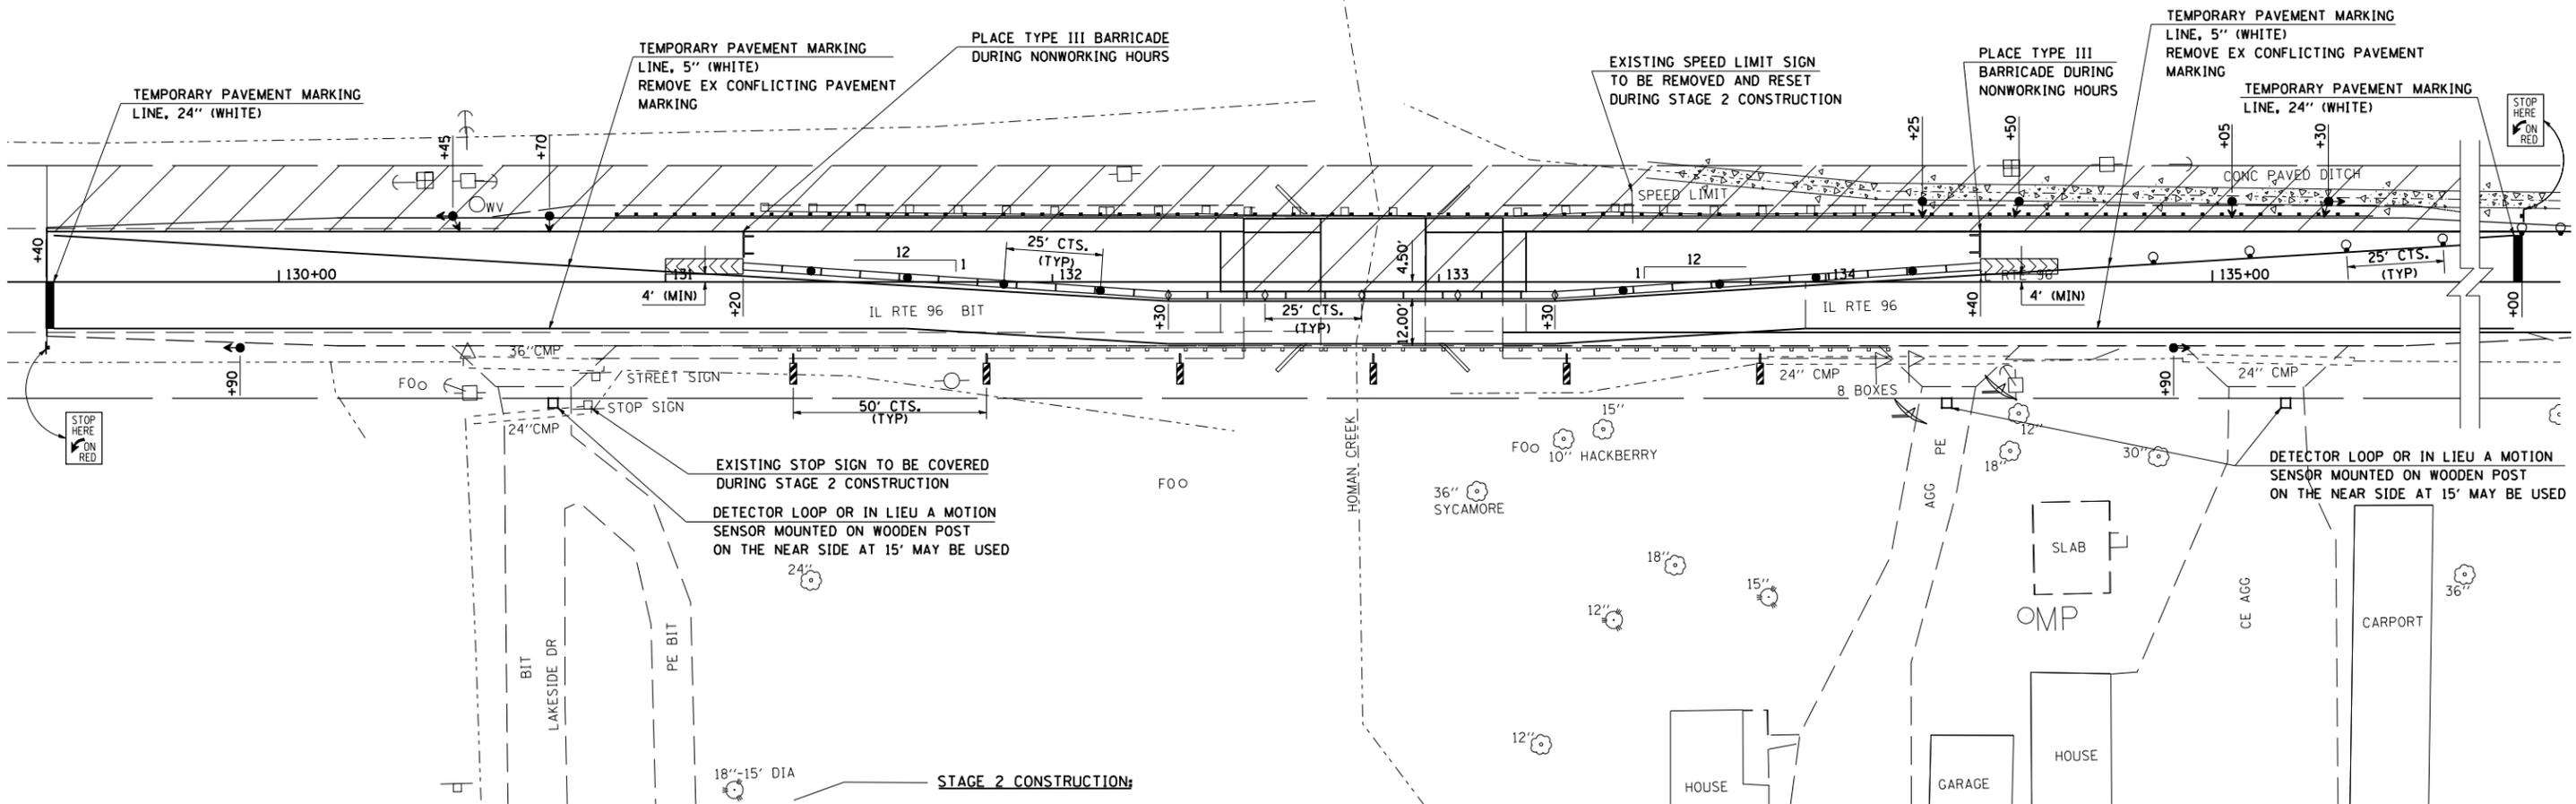


**STAGE 2 CONSTRUCTION:**

1. RELOCATE TEMPORARY CONCRETE BARRIER AND OTHER TRAFFIC CONTROL ITEMS IN ACCORDANCE WITH STANDARD 701321 AND STAGE 2 TRAFFIC DETAILS.
2. SHIFT TRAFFIC TO RIGHT (NORTHBOUND) LANE.
3. REMOVE EXISTING DECK BEAMS, GUARDRAIL AND PAVEMENT FOR NEW APPROACHES LEFT OF CENTERLINE.
4. CONSTRUCT NEW DECK BEAMS AND APPROACH PAVEMENT LEFT OF CENTERLINE.
5. CONSTRUCT WIDENING, EMBANKMENT, AND RIPRAP LEFT OF CENTERLINE.
6. INSTALL PROPOSED GUARDRAIL LEFT OF CENTERLINE.

**STAGE 3 CONSTRUCTION:**

1. REMOVE TRAFFIC CONTROL ITEMS ASSOCIATED WITH STANDARD 701321 AND RESTORE TWO-LANE TWO-WAY TRAFFIC
2. MILL ROADWAY AND CONSTRUCT THE HMA SURFACE COURSE/SHOULDERS, AGGREGATE SHOULDERS, AND STRIPING USING THE APPROPRIATE TRAFFIC CONTROL

REVISIONS	
NAME	DATE



ILLINOIS DEPARTMENT OF TRANSPORTATION  
**TRAFFIC CONTROL DETAILS**  
 STAGE 2  
 DATE: 05/31/07  
 DRAWN BY JCW  
 CHECKED BY JRB

PLOT DATE = 6/29/2007  
 FILE NAME = c:\projects\6851685\hutchison\_fm\124477.mxd.dgn  
 PLOT SCALE = 42.3524 / IN.  
 USER NAME = laughlin-1