SIGN DETAIL

1:100

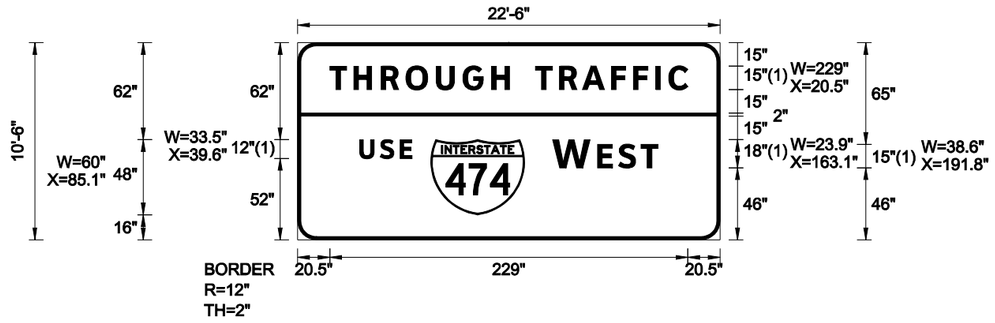

FONT:
(1) ClearviewHwy-5-W

M.U.T.C.D.: 2009 Edition

Panel Style: guide_fwy_advance_a_clearview.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

STA.	501+21
WIDTH x HGHT.	22'-6" x 10'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Color 24
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Color 92/Color 92

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	85.1	16	60	48

LETTER POSITIONS (X)

																																				LENGTH	SERIES/SIZE
T	H	R	O	U	G	H		T	R	A	F	F	I	C																								ClearviewHwy-5-W
20.5	35.9	53.4	69.2	88.6	105.6	124	135.5	152	167.4	182.2	200.6	214.8	228.9	237.3																							229	15
U	S	E																																				ClearviewHwy-5-W
39.6	52.8	65.4																																			33.5	12
W	E	S	T																																			ClearviewHwy-5-W
163.1	191.8	205.3	219.6																																		67.3	18,15

FILE NAME =	DESIGNED - SMS	REVISED -	
...\D468620-sht-signdetail03.dgn	DRAWN - SMS	REVISED -	
USER NAME = IDOT	CHECKED - LDC	REVISED -	
PLOT DATE = 7/16/2012	DATE - JULY 20, 2012	REVISED -	

Kaskaskia Engineering Group, LLC

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN PANEL DETAILS

SCALE: | SHEET NO. 3 OF 37 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	90-(14R;(14HB-4,14,14HVB)BR)	TAZEWELL	2433	1586
		CONTRACT NO. 68620		
	ILLINOIS FED. AID PROJECT			