SIGN DETAIL

1:100

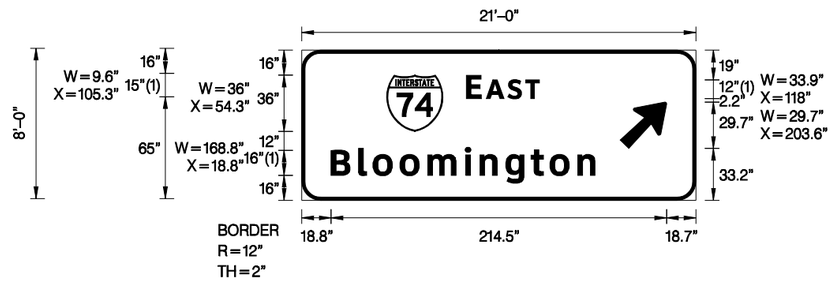

FONT:
(1) ClearviewHwy–5–W
M.U.T.C.D.: 2009 Edition

SIGN NUMBER	4S090I155R031.9
WIDTH x HGHT.	21'–0" x 8'–0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Color 24
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Color 100/Color 100

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	54.3	44	36	36
AR_Type A	315	203.6	33.2	24	37.7

Panel Style: guide_fwy_overhead_2009.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

											LENGTH	SERIES/SIZE
E	A	S	T									ClearviewHwy–5–W
105.3	118	131.8	143.3								46.7	15,12
B	I	o	o	m	i	n	g	t	o	n		ClearviewHwy–5–W
18.8	36.4	45.6	62.8	80.6	104.5	113.9	130.5	146.6	158.7	176.5	168.8	16/13

FILE NAME =	DESIGNED - SMS	REVISED -	
...\D468620-sht-signdetail21.dgn	DRAWN - SMS	REVISED -	
USER NAME = IDOT	CHECKED - LDC	REVISED -	
PLOT DATE = 7/16/2012	DATE - JULY 20, 2012	REVISED -	

Kaskaskia Engineering Group, LLC

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN PANEL DETAILS

SCALE: | SHEET NO. 21 OF 37 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	90-(14R;(14HB-4,14,14HVB)BR)	TAZEWELL	2433	1604
		CONTRACT NO. 68620		
	ILLINOIS FED. AID PROJECT			

• 74 & 155