SIGN DETAIL

1:100

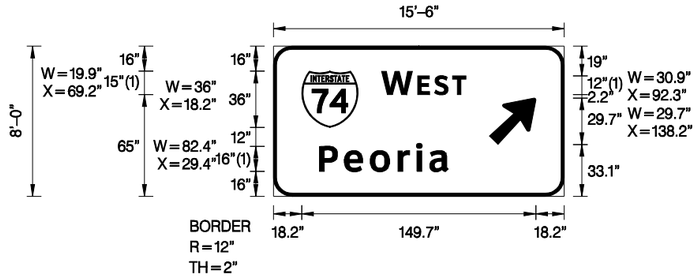

FONT:
(1) ClearviewHwy–5–W

M.U.T.C.D.: 2009 Edition

Panel Style: guide_fwy_overhead_2009.ssi

Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

SIGN NUMBER	4C090LMORL102.2
WIDTH x HGHT.	15'–6" x 8'–0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Color 24
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Color 92/Color 100

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	18.2	44	36	36
AR_Type A	315	138.2	33.1	24	37.7

LETTER POSITIONS (X)

																																				LENGTH	SERIES/SIZE
W	E	S	T																																			ClearviewHwy–5–W
69.2	92.3	103	114.5																																		54	15,12
P	e	o	r	i	a																																		ClearviewHwy–5–W
29.4	45.4	62	79.8	91.5	100																																82.4	1613

FILE NAME =	DESIGNED - SMS	REVISED -	Kaskaskia Engineering Group, LLC	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGN PANEL DETAILS
...\D468620-sht-signdetail27.dgn	DRAWN - SMS	REVISED -			
USER NAME = IDOT	CHECKED - LDC	REVISED -			SCALE: / SHEET NO. 27 OF 37 SHEETS / STA. / TO STA.
PLOT DATE = 7/16/2012	DATE - JULY 20, 2012	REVISED -			

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	90-[14R;(14HB-4,14,14HVB)BR]	TAZEWELL	2433	1610
		CONTRACT NO. 68620		
	ILLINOIS FED. AID PROJECT			

• 74 & 155