## NORTH CURB LINE

| Location | Station | Offset | Theoretical Grade Elevations |
|---|---|---|---|
| End W. Appr. Pav't. | 148+55.67 | -20.00 | 847.69 |
| A | 148+65.67 | -20.00 | 847.74 |
| B | 148+75.67 | -20.00 | 847.78 |
| Bk. W. Abut. | 148+85.67 | -20.00 | 847.82 |

## NORTH EDGE OF PAVEMENT

| Location | Station | Offset | Theoretical Grade Elevations |
|---|---|---|---|
| End W. Appr. Pav't. | 148+57.67 | -12.00 | 847.86 |
| A | 148+67.67 | -12.00 | 847.91 |
| B | 148+77.67 | -12.00 | 847.96 |
| Bk. W. Abut. | 148+87.67 | -12.00 | 847.99 |

## ℄ ROADWAY & PG

| Location | Station | Offset | Theoretical Grade Elevations |
|---|---|---|---|
| End W. Appr. Pav't. | 148+60.66 | 0.00 | 848.13 |
| A | 148+70.66 | 0.00 | 848.18 |
| B | 148+80.66 | 0.00 | 848.22 |
| Bk. W. Abut. | 148+90.66 | 0.00 | 848.25 |

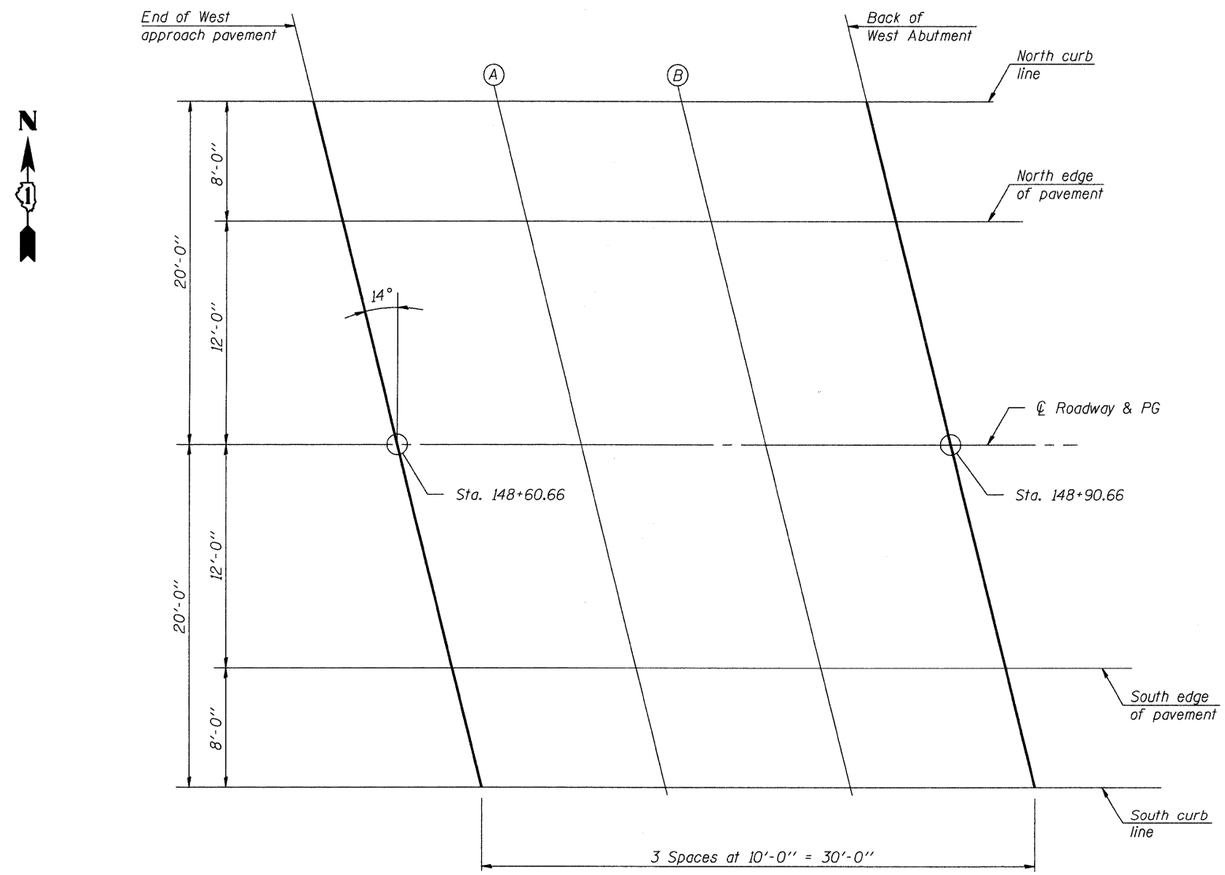


PLAN

## SOUTH EDGE OF PAVEMENT

| Location | Station | Offset | Theoretical Grade Elevations |
|---|---|---|---|
| End W. Appr. Pav't. | 148+63.65 | 12.00 | 847.89 |
| A | 148+73.65 | 12.00 | 847.94 |
| B | 148+83.65 | 12.00 | 847.98 |
| Bk. W. Abut. | 148+93.65 | 12.00 | 848.01 |

## SOUTH CURB LINE

| Location | Station | Offset | Theoretical Grade Elevations |
|---|---|---|---|
| End W. Appr. Pav't. | 148+65.65 | 20.00 | 847.74 |
| A | 148+75.65 | 20.00 | 847.78 |
| B | 148+85.65 | 20.00 | 847.82 |
| Bk. W. Abut. | 148+95.65 | 20.00 | 847.85 |

FILE NAME = \\uschgifc207\c60895873\c60895873\900.cad\901.dr-eanga\sheet\structural\056-3177 60895873 SB6_Top of West Approach Slab Elevations.sht

Sheet No. S-6 of 23

AECOM

USER NAME = dobezicd
PLOT SCALE = 0:1 '1' / IN.
PLOT DATE = 5/28/2009

| | | |
|---|---|---|
| DESIGNED - | DD | REVISED - |
| DRAWN - | DD | REVISED - |
| CHECKED - | ATB | REVISED - |
| DATE - | 3/18/2009 | REVISED - |

**MCHENRY COUNTY**
**DIVISION OF TRANSPORTATION**

**TOP OF WEST APPROACH SLAB ELEVATIONS**
**STRUCTURE NO. 056-3177**

SCALE: | SHEET NO. OF SHEETS | STA. TO STA.

| F.A.S. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 0031 | 06-00323-00-BR | MCHENRY | 53 | 25 |
| | | CONTRACT NO. 63218 | | |
| FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT | | |