





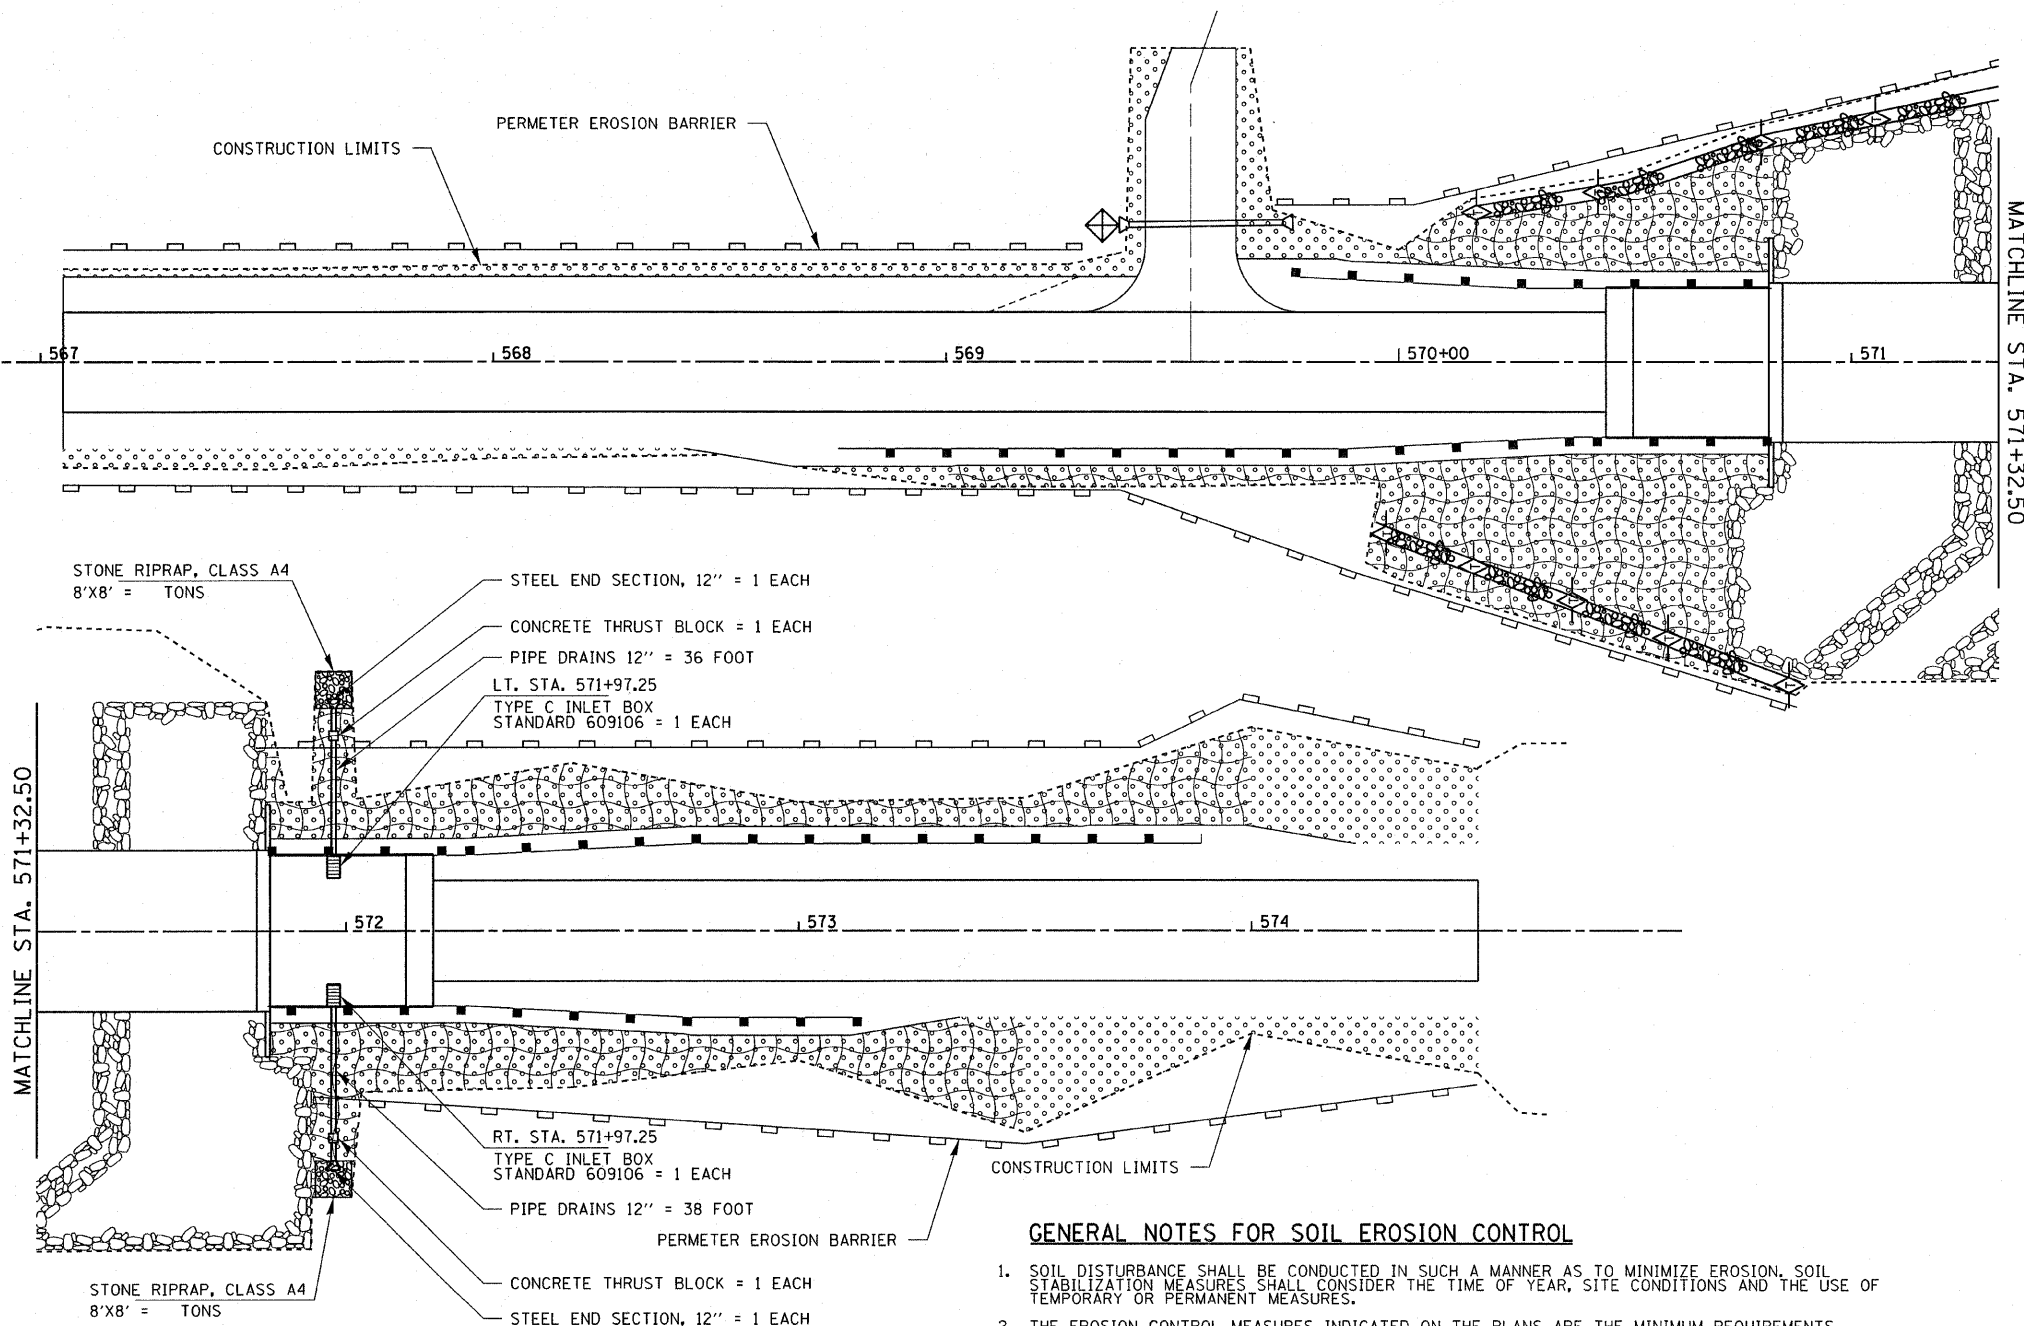




EROSION CONTROL PLAN & STORMWATER POLLUTION PREVENTION PLAN

THIS PROJECT DISTURBS 1.0 ACRES OF TOTAL LAND AREA.

ROUTE NO. F.A.P. 665	SECTION (144-B)BR	COUNTY FULTON	TOTAL SHEETS 67	SHEET NO. 15
FED. ROAD DIST. NO.		ILLINOIS CONTRACT NO. 68091		



LEGEND

-  INLET & PIPE PROTECTION
-  TEMPORARY DITCH CHECK
-  PERIMETER EROSION BARRIER
-  SEEDING, CLASS 2A
-  EROSION CONTROL BLANKET
-  RIPRAP DITCH - STONE RIPRAP CLASS A4
-  STONE RIPRAP CLASS A4 (SEE BRIDGE PLANS)

GENERAL NOTES FOR SOIL EROSION CONTROL

- SOIL DISTURBANCE SHALL BE CONDUCTED IN SUCH A MANNER AS TO MINIMIZE EROSION. SOIL STABILIZATION MEASURES SHALL CONSIDER THE TIME OF YEAR, SITE CONDITIONS AND THE USE OF TEMPORARY OR PERMANENT MEASURES.
- THE EROSION CONTROL MEASURES INDICATED ON THE PLANS ARE THE MINIMUM REQUIREMENTS. ADDITIONAL MEASURES MAY BE REQUIRED, AS DIRECTED BY THE ENGINEER.
- SOIL EROSION AND SEDIMENT CONTROL FEATURES SHALL BE CONSTRUCTED PRIOR TO THE COMMENCEMENT OF CLEARING OR EARTHWORK ACTIVITIES, OF UPLAND AREAS.
- THE CONTRACTOR SHALL CLEAN UP AND GRADE THE WORK AREA AS THE PROJECT PROGRESSES TO ELIMINATE THE CONCENTRATION OF RUNOFF. THE PAVEMENT SHALL BE CLEANED DAILY TO REMOVE EARTH MATERIAL TO THE SATISFACTION OF THE ENGINEER.
- DISTURBED AREAS SHALL BE STABILIZED WITH TEMPORARY OR PERMANENT MEASURES WITHIN 14 CALENDAR DAYS OF THE END OF ACTIVE HYDROLOGIC DISTURBANCE.
- AREAS OR EMBANKMENTS HAVING SLOPES GREATER 3H:1V SHALL BE STABILIZED WITH EROSION CONTROL BLANKET IN COMBINATION WITH SEEDING.
- ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN 30 DAYS AFTER FINAL SITE STABILIZATION IS ACHIEVED OR AFTER THE TEMPORARY MEASURES ARE NO LONGER NEEDED.
- SEE SPECIAL PROVISIONS FOR STORMWATER POLLUTION PREVENTION PLAN.

HAMPTON, LENZINI & RENWICK, INC.
CIVIL & STRUCTURAL ENGINEERS
LAND SURVEYORS

3085 STEVENSON DRIVE, SUITE 201
SPRINGFIELD, ILLINOIS 62703
(217) 546-3400

ELGIN • SPRINGFIELD

PROJECT NUMBER: 12-37-0003-1 DATE: 08/13/08
DESIGNED: L.F.S. CHECKED: S.W.M. DRAWN: D.T.M.

EROSION CONTROL PLAN
F.A.P. ROUTE 665 (IL 116) OVER LITTLERS CREEK
SECTION (144-B) BR
FULTON COUNTY
STATION 571+32.50
STRUCTURE NO. 029-0066