NOTE: DISTANCES SHALL BE PROVIDED BY IDOT DISTRICT 4 OPERATIONS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	(34-6,55-1)	HANCOCK/ McDONOUGH	433	245
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

STATE CONTRACT NO. 68206

SIGN DETAIL

1:10

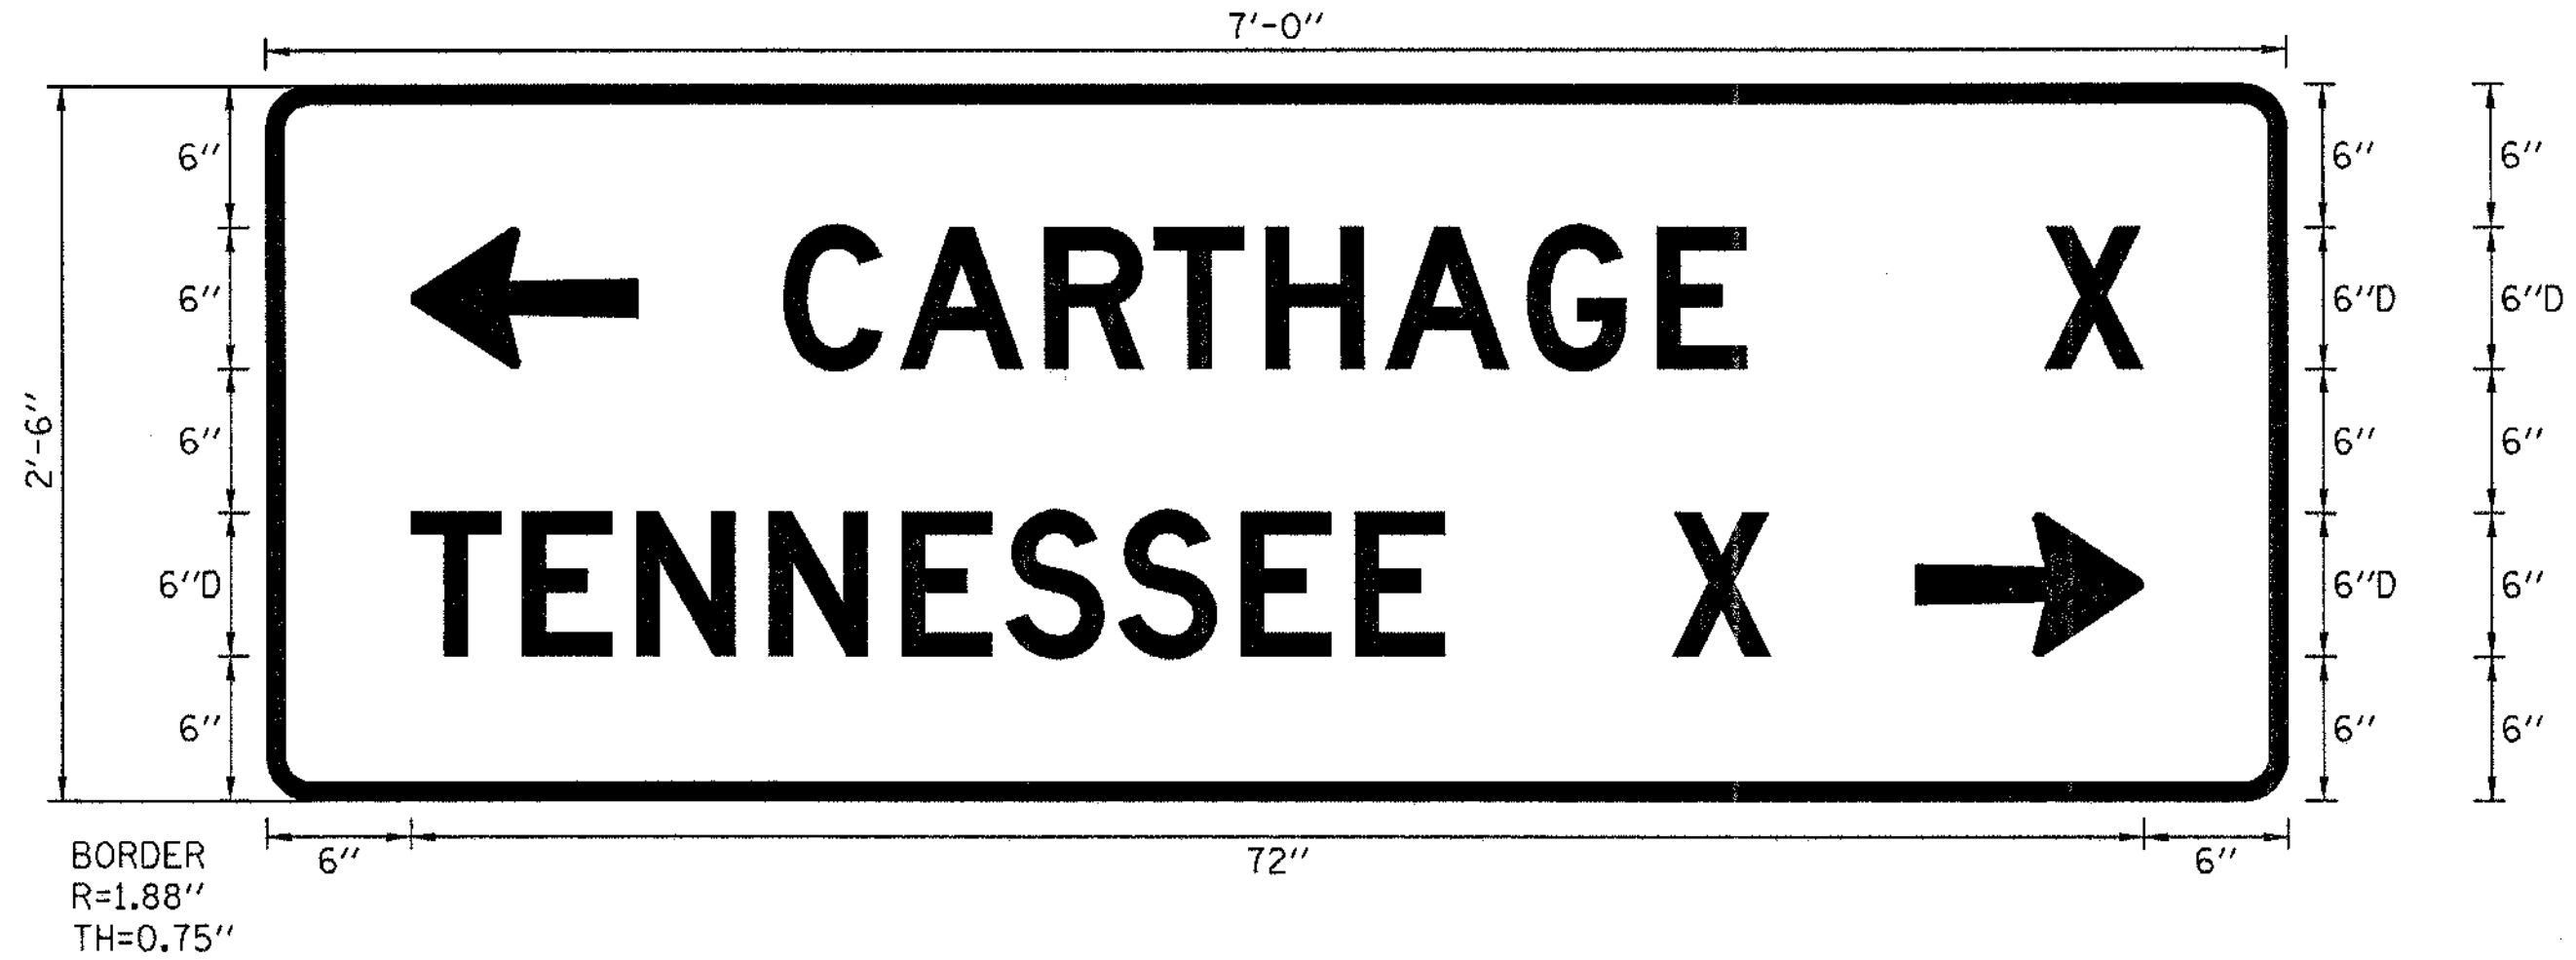

SIGN NUMBER	D1–2A
WIDTH x HGHT.	7'–0" x 2'–6"
BORDER WIDTH	0.75"
CORNER RADIUS	1.88"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/Pure White

SYMBOL	ROT	X	Y	WID	HT
ARMED	180	6	18	6	9.4
ARMED	0	68.5	6	6	9.5

Panel Style: D1–2A.ssi

Dimensions are in inches.tenths

Letter spacings are to start of next letter

LETTER POSITIONS (X)

													LENGTH	SERIES/SIZE
	C	A	R	T	H	A	G	E		X				D 2000
21.5	4.9	6	4.6	4.6	5	5.9	5.4	3.7	12.4	4.1	6		56.5	6
	T	E	N	N	E	S	S	E	E		X			D 2000
6	4.6	4.7	5.5	5.5	4.3	4.7	5.1	4.7	3.7	9.5	4.1	21.5	56.5	6

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SIGN PANEL STANDARDS

SHEET 6 OF 14

SCALE: VERT. N/A HORIZ. N/A

DATE 6/21/04

DRAWN BY BDS

CHECKED BY SRD

Plot Date: 7/19/2006
Plot Time: 10:27:10 AM
Plotted By: bschmidt
Pen Table: idot.tbl
Filename: i:\03033\Cad\T\Construction_Plans\223_DetailsSignPanel.dgn