SIGN DETAIL
TEMP_SIGN – 19

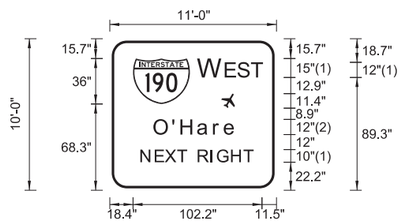

SIGN NUMBER	Temp_Sign – 6
WIDTH x HGHT.	11'–0" x 10'–0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	18.4	68.3	45	36
Airport	330	88.2	65	11.7	12

Panel Style: Guide_Expressway_Temporary.ssi
Dimensions are in inches.tenths

FONT:
(1) ClearviewHwy-4-W
(2) ClearviewHwy-5-W

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																						LENGTH	SERIES/SIZE
W	E	S	T																				ClearviewHwy–4–W
70.6	91.8	101.8	112.5																			49.9	15,12
O	'	H	a	r	e																		ClearviewHwy–5–W
35.6	50.4	56.9	70.1	82.9	91.4																	64.6	12/9.8
N	E	X	T		R	I	G	H	T														ClearviewHwy–4–W
24.9	36.2	44.2	53.9	60.6	70.3	80.4	85.4	96.6	106.5													88.2	10

SIGN DETAIL
TEMP_SIGN – 20

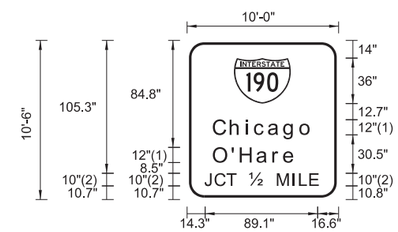

SIGN NUMBER	Temp_Sign – 8
WIDTH x HGHT.	10'–0" x 10'–6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	37.1	76	45	36

Panel Style: Guide_Expressway_Temporary.ssi
Dimensions are in inches.tenths

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-4-W

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																						LENGTH	SERIES/SIZE
C	h	i	c	a	g	o																	ClearviewHwy–5–W
21.4	34.8	47.5	54.1	65	77.3	90.1																77.9	12/9.8
O	'	H	a	r	e																		ClearviewHwy–5–W
21.4	36.2	42.8	55.9	68.7	77.2																	64.6	12/9.8
J	C	T																					ClearviewHwy–4–W
14.3	22.4	31.9																				24.2	10
12																							ClearviewHwy–4–W
48.5																						13.3	10
M	I	L	E																				ClearviewHwy–4–W
71.8	84	89.4	97.5																			31.6	10

TIS–04

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - MM	REVISED -
		DRAWN - MM	REVISED -
	PLOT SCALE = $SCALE$	CHECKED - KDA	REVISED -
	PLOT DATE = $DATE$	DATE - 10/19/12	REVISED -

TENG & ASSOCIATES, INC.
ENGINEERS/ARCHITECTS/PLANNERS
CHICAGO, ILLINOIS

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY INFORMATION SIGN
MANNHEIM ROAD

SCALE: N.T.S | SHEET NO. OF SHEETS | STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	0105-WRS	COOK	537	169
		CONTRACT NO. 60P35		
		ILLINOIS FED. AID PROJECT		

..\D160P35-MOT-GUIDESIGN\DGN..\D160P35-BORDER1.DGN
12-05-2012,15:46:13 B4/ZEKKJ F:\DOC_EMP\CH-#0012584-02\COMMON\PSE1\TEMPSHEETPLOT\D160P35-SHT-TEMPINFSIGN_6.DGN