SIGN DETAIL
DETOUR_SIGN – 3

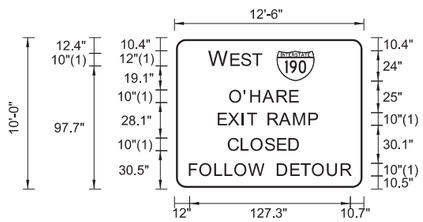

SIGN NUMBER	D–14 & D–16
WIDTH x HGHT.	12'–6" x 10'–0"
BORDER WIDTH	1.5"
CORNER RADIUS	8"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Orange
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	80.9	85.6	30	24

Panel Style: Construction_Sign_Temporary.ssi
Dimensions are in inches.tenths

FONT:
(1) ClearviewHwy-4-W

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																						LENGTH	SERIES/SIZE
W	E	S	T																				ClearviewHwy–4–W
27.9	45	53.2	62.2																			41	12,10
O	'	H	A	R	E																		ClearviewHwy–4–W
44	55.5	60.6	70.3	81.5	91.6																	53.5	10
E	X	I	T		R	A	M	P															ClearviewHwy–4–W
34.9	42.9	53.5	58	64.7	74.4	83.4	94.6	106.8														78.7	10
C	L	O	S	E	D																		ClearviewHwy–4–W
42.9	53.2	60.9	72.1	82	90.9																	55.6	10
F	O	L	L	O	W		D	E	T	O	U	R											ClearviewHwy–4–W
12	20.3	32.3	40.4	48.1	59.4	71.7	81.7	92.4	100.5	109.5	121.4	132.3										127.3	10

SIGN DETAIL
DETOUR_SIGN – 4

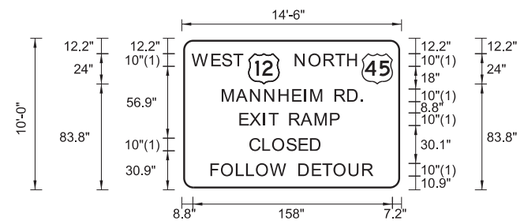

SIGN NUMBER	D–15
WIDTH x HGHT.	14'–6" x 10'–0"
BORDER WIDTH	1.5"
CORNER RADIUS	8"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Orange
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT
M1_4	0	53	83.8	24	24
M1_4	0	142.8	83.8	24	24

Panel Style: Construction_Sign_Temporary.ssi
Dimensions are in inches.tenths

FONT:
(1) ClearviewHwy-4-W

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																						LENGTH	SERIES/SIZE
W	E	S	T																				ClearviewHwy–4–W
8.8	24.1	32.4	41.3																			39.2	10
N	O	R	T	H																			ClearviewHwy–4–W
90.1	101	113	122.1	131.5	138.7																	50.4	10
M	A	N	N	H	E	I	M		R	D	.												ClearviewHwy–4–W
32.4	43.5	54.7	66	77.3	88.1	97.1	102.5	111	121.6	131.7	142											111.8	10
E	X	I	T		R	A	M	P															ClearviewHwy–4–W
46.3	54.2	64.8	69.4	76	85.7	94.7	106	118.1														78.7	10
C	L	O	S	E	D																		ClearviewHwy–4–W
54.2	64.5	72.2	83.5	93.3	102.3																	55.6	10
F	O	L	L	O	W		D	E	T	O	U	R											ClearviewHwy–4–W
23.4	31.7	43.6	51.7	59.4	70.7	83	93	103.8	111.8	120.8	132.8	143.6										127.3	10

TIS–05

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - MAM	REVISED -
		DRAWN - MAM	REVISED -
	PLOT SCALE = $SCALE$	CHECKED - KDA	REVISED -
TENG & ASSOCIATES, INC. ENGINEERS/ARCHITECTS/PLANNERS CHICAGO, ILLINOIS	PLOT DATE = $DATE$	DATE - 10/19/12	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY INFORMATION SIGN
DETOUR PLAN

SCALE: N.T.S. | SHEET NO. OF SHEETS | STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	0105-WRS	COOK	537	170
		CONTRACT NO. 60P35		
		ILLINOIS FED. AID PROJECT		

..\D160P35-MOT.GUIDESIGN.DGN..\D160P35-BORDER1.DGN
10-25-2012,15:16:13 BAJZEKJ F:\DOC_EXP\CH-6080\2584-02\COMMON\PSE1\TEMPSHEETPLOT\D160P35-SHT-TEMPINFSIGN-4.DGN