CONTRACT NO. 66528

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
649	*	LIVINGSTON	15	4
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

*(16)RS-4,(17,28)RS-2

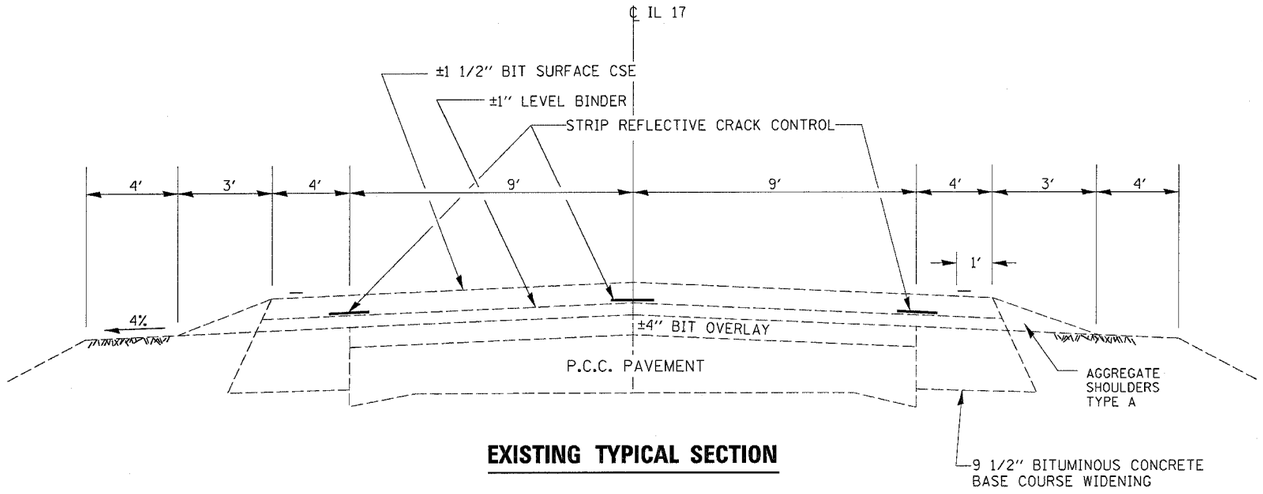

EXISTING TYPICAL SECTION

MIXTURES TABLE			
	SUPERPAVE SURFACE	SUPERPAVE LEVEL BINDER	SUPERPAVE INCIDENTAL SURFACE
PG GRADE	PG 64-22	PG 64-22	PG 64-22
MAX % RAP ALLOWABLE**	10	15	15
DESIGN AIR VOIDS	4.0% @ N70	4.0% @ N70	4.0% @ N50
MIXTURE COMPOSITION	IL 12.5 OR IL 9.5	IL 9.5	IL 12.5 OR IL 9.5
FRICTION AGGREGATE	MIXTURE C		MIXTURE C
PLANT LIMITS	CLASS I	CLASS I	CLASS I
DENSITY TEST METHOD	CORRELATION	SATISFACTION OF THE ENGINEER	

** IF RAP OPTION IS SELECTED, THE ASPHALT CEMENT GRADE MAY NEED TO BE ADJUSTED. THIS WILL BE DETERMINED BY THE ENGINEER.

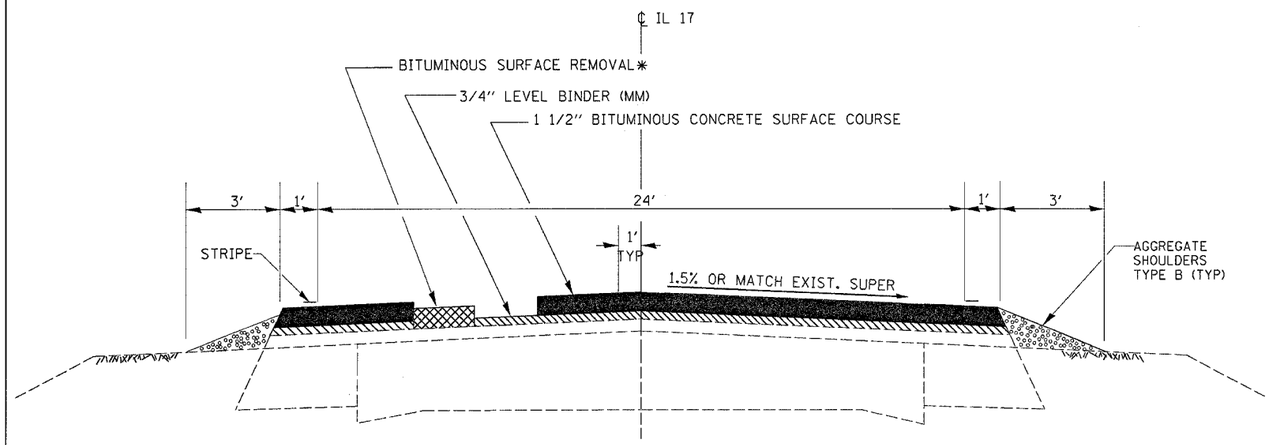

PROPOSED TYPICAL SECTION

*STA. 101+90 TO STA. 263+66 - 1 1/2"
*STA. 263+96 TO STA. 710+26 - 3/4"

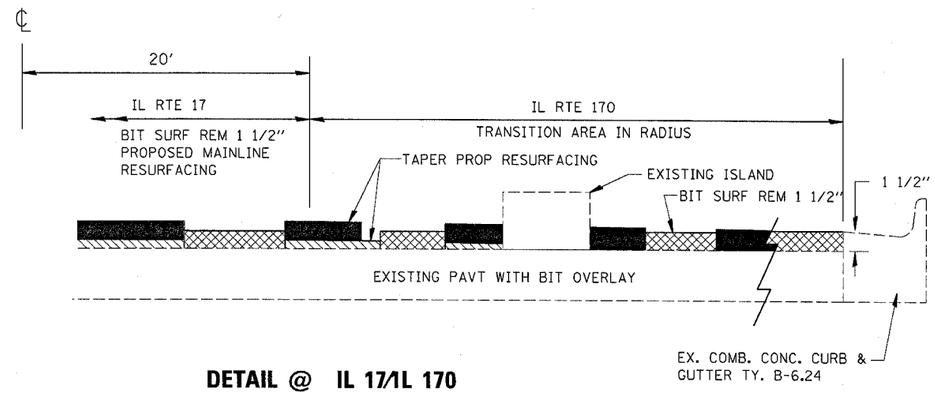

DETAIL @ IL 17/IL 170

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS

SCALE: VERT.
HORIZ.
DATE

DRAWN BY
CHECKED BY

PLOT DATE = 11/6/2004
FILE NAME = #FILE#
PLOT SCALE = #SCALE#
REFERENCE = #REF#