STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

WEST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
End of S. Appr. Slab	164+42.82	-16.000	609.78
A_1	164+52.82	-16.000	609.86
A_2	164+62.82	-16.000	609.94
BK. S. Abut.	164+72.82	-16.000	610.00

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End of S. Appr. Slab	164+45.13	-12.000	609.88
A_1	164+55.13	-12.000	609.96
A_2	164+65.13	-12.000	610.04
BK. S. Abut.	164+75.13	-12.000	610.10

℄ IL RTE. 84, P.G.L., LONG. CONSTR. JT. & STAGE CONSTR. LINE

Location	Station	Offset	Theoretical Grade Elevations
End of S. Appr. Slab	164+52.06	0.000	610.13
A_1	164+62.06	0.000	610.20
A_2	164+72.06	0.000	610.27
BK. S. Abut.	164+82.06	0.000	610.33

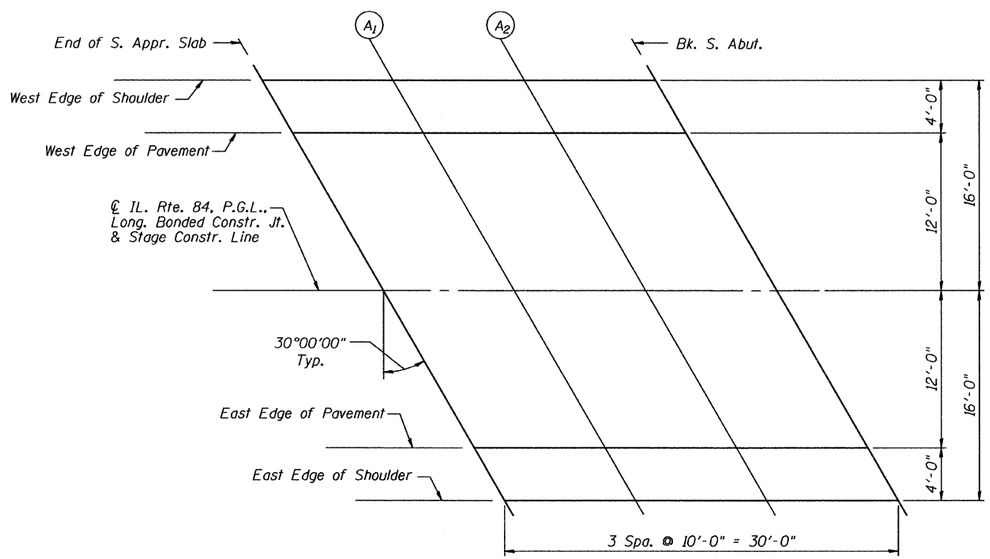

PLAN

N

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End of S. Appr. Slab	164+58.99	12.000	609.99
A_1	164+68.99	12.000	610.06
A_2	164+78.99	12.000	610.13
BK. S. Abut.	164+88.99	12.000	610.18

EAST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
End of S. Appr. Slab	164+61.30	16.000	609.93
A_1	164+71.30	16.000	610.00
A_2	164+81.30	16.000	610.06
BK. S. Abut.	164+91.30	16.000	610.11

DESIGNED	J.Z.
CHECKED	J.J.G.
DRAWN	R.B.H.
CHECKED	J.J.G.

GRAEF 8501 W. Higgins Road; Suite 280 Chicago, Illinois 60631 (773) 399-0112

TOP OF SOUTH APPROACH SLAB ELEVATIONS

Illinois Rte. 84 Over Apple River Tributary

STATION 165+50.00 STRUCTURE NO. 043-0078

SHEET NO.	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
SA7 OF 25 SHEETS	308	104BR-1	JO DAVIESS	126	43
			CONTRACT NO. 64B26		
	10-15-2010	ILLINOIS	FED. AID PROJECT		

h:\jobs2010\2010381\cad\structure1\dgn\00\SA07_TOP_OF_S_APPROACH.dgn
12/13/2010