



**SN 060-0130
STAGE I CONSTRUCTION**


RIGHT TURN LANE
CLOSED, ±700 FT
DRUMS AT 25' CTS.
SEE STANDARD 701701
FOR DETAILS NOT
SHOWN ON THE PLANS.

IMPACT ATTENUATORS, TEMPORARY
NON-REDIRECTIVE, TL 3 - 1 EACH

TEMPORARY CONCRETE BARRIER
325 FT

IMPACT ATTENUATORS, TEMPORARY
FULLY-REDIRECTIVE, NARROW, TL 3 - 1 EACH
MAX WIDTH = 3'-2"
MAX LENGTH = 24'

Sta. 422+87.8 ILL RTE. 143
Sta. 837+78.6 ILL RTE. 159

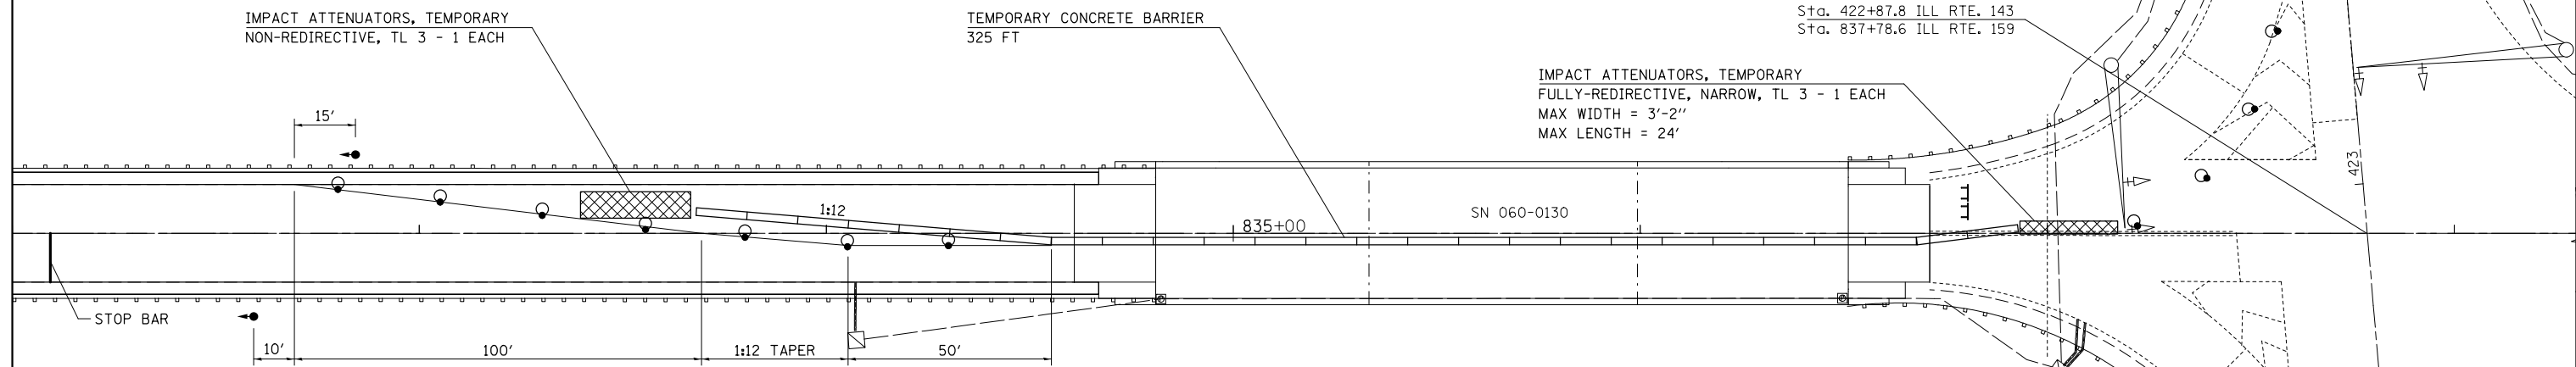


SUGGESTED SEQUENCE OF CONSTRUCTION:

- STAGE I -
COORDINATE THE REVISION OF THE EXISTING TRAFFIC SIGNAL PHASING WITH THE BUREAU OF OPERATIONS.
PLACE STOP BAR AS SHOWN ON THE PLANS.
REMOVE CONFLICTING PAVEMENT MARKING.
PLACE TEMPORARY CONCRETE BARRIER AND IMPACT ATTENUATORS, TEMPORARY.
SEE STANDARD 701321 FOR DETAILS NOT SHOWN ON THE PLANS.
COMPLETE STRUCTURE REPAIRS FOR STAGE I CONSTRUCTION.
PLACE WATERPROOFING MEMBRANE SYSTEM AND HMA SURFACE COURSE OVER STRUCTURE FOR STAGE I.
CONSTRUCT TEMPORARY RAMPS ON BOTH ENDS OF THE STRUCTURE FOR STAGE I.
- STAGE II -
RELOCATE TEMPORARY CONCRETE BARRIER AND IMPACT ATTENUATORS.
COMPLETE STRUCTURE REPAIRS FOR STAGE II CONSTRUCTION.
PLACE WATERPROOFING MEMBRANE SYSTEM AND HMA SURFACE COURSE OVER STRUCTURE FOR STAGE II.
CONSTRUCT TEMPORARY RAMPS ON BOTH ENDS OF THE STRUCTURE FOR STAGE II.

**SN 060-0130
STAGE II CONSTRUCTION**

Sta. 422+87.8 ILL RTE. 143
Sta. 837+78.6 ILL RTE. 159

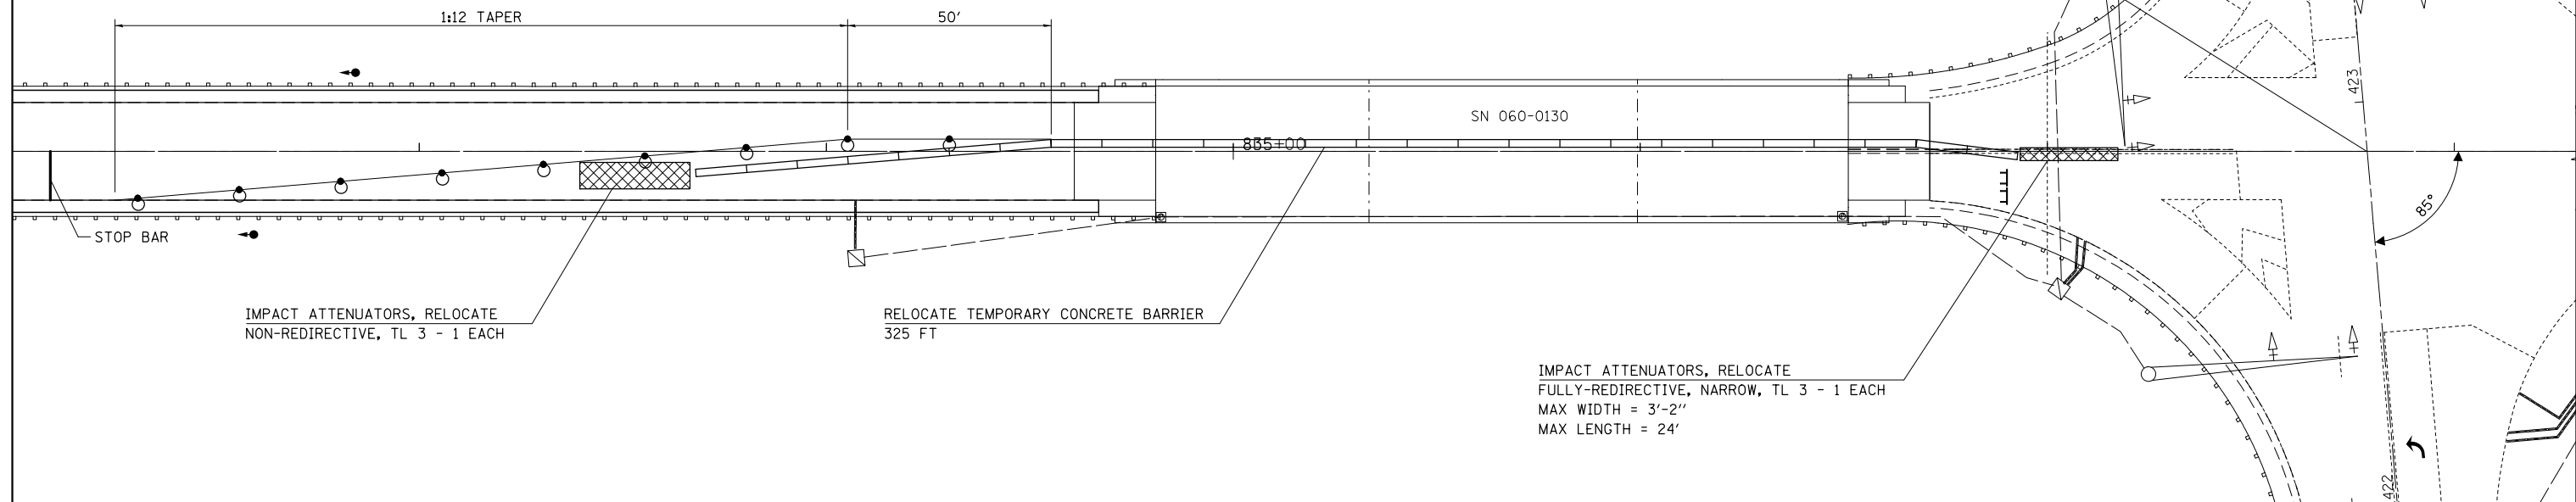

IMPACT ATTENUATORS, RELOCATE
NON-REDIRECTIVE, TL 3 - 1 EACH

RELOCATE TEMPORARY CONCRETE BARRIER
325 FT

IMPACT ATTENUATORS, RELOCATE
FULLY-REDIRECTIVE, NARROW, TL 3 - 1 EACH
MAX WIDTH = 3'-2"
MAX LENGTH = 24'

FILE NAME =	USER NAME = challandeske	DESIGNED -	REVISED -
et:\pw\work\p\dot\challandeske\d0332017\0876625-sht-plan1.dgn		DRAWN -	REVISED -
	PLOT SCALE = 100.0000' / in.	CHECKED -	REVISED -
#MODELNAME#	PLOT DATE = 1/17/2014	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

**SN 060-0130
STAGE CONSTRUCTION**

SCALE: 20 SHEET 1 OF 1 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
604	(103,125)RS-2, 125-BR-2	MADISON	46	16
CONTRACT NO. 76G25				
ILLINOIS FED. AID PROJECT				