


SAND MODULE IMPACT ATTENUATOR LAYOUT  
(IF OPTION USED)

**SEQUENCE OF CONSTRUCTION - STAGE I**

SEE STANDARD 701321 FOR LAYOUT OF TRAFFIC CONTROL.  
 PLACE 'HMA BASE COURSE WIDENING, 9 INCH' FOR 3 FT WIDENING AS SHOWN ON PLANS.  
 PLACE 512.5 FT TEMPORARY CONCRETE BARRIER AND 2 EACH IMPACT ATTENUATORS, TEMPORARY.  
 REMOVE SKIP-DASH AND SOLID EDGE PAVEMENT MARKING BETWEEN STOP BARS.

**SEQUENCE OF CONSTRUCTION - STAGE II**

SEE STANDARD 701321 FOR DETAILS NOT SHOWN ON PLANS.  
 PLACE A 46 FT HOT-MIX ASPHALT RAMP ON THE WEST END OF THE STRUCTURE AND A 77 FT HOT-MIX ASPHALT RAMP ON THE EAST END OF THE STRUCTURE.  
 PLACE 'HMA BASE COURSE WIDENING, 9 INCH FOR 3 FT WIDENING AS SHOWN ON PLANS.  
 PLACE TRAFFIC BARRIER TERMINAL, TYPE 6 AND TEMPORARY GUARDRAIL ON BOTH ENDS OF STRUCTURE.  
 RELOCATE 512.5 FT OF TEMPORARY CONCRETE BARRIER AND RELOCATE 2 EACH IMPACT ATTENUATORS, TEMPORARY.

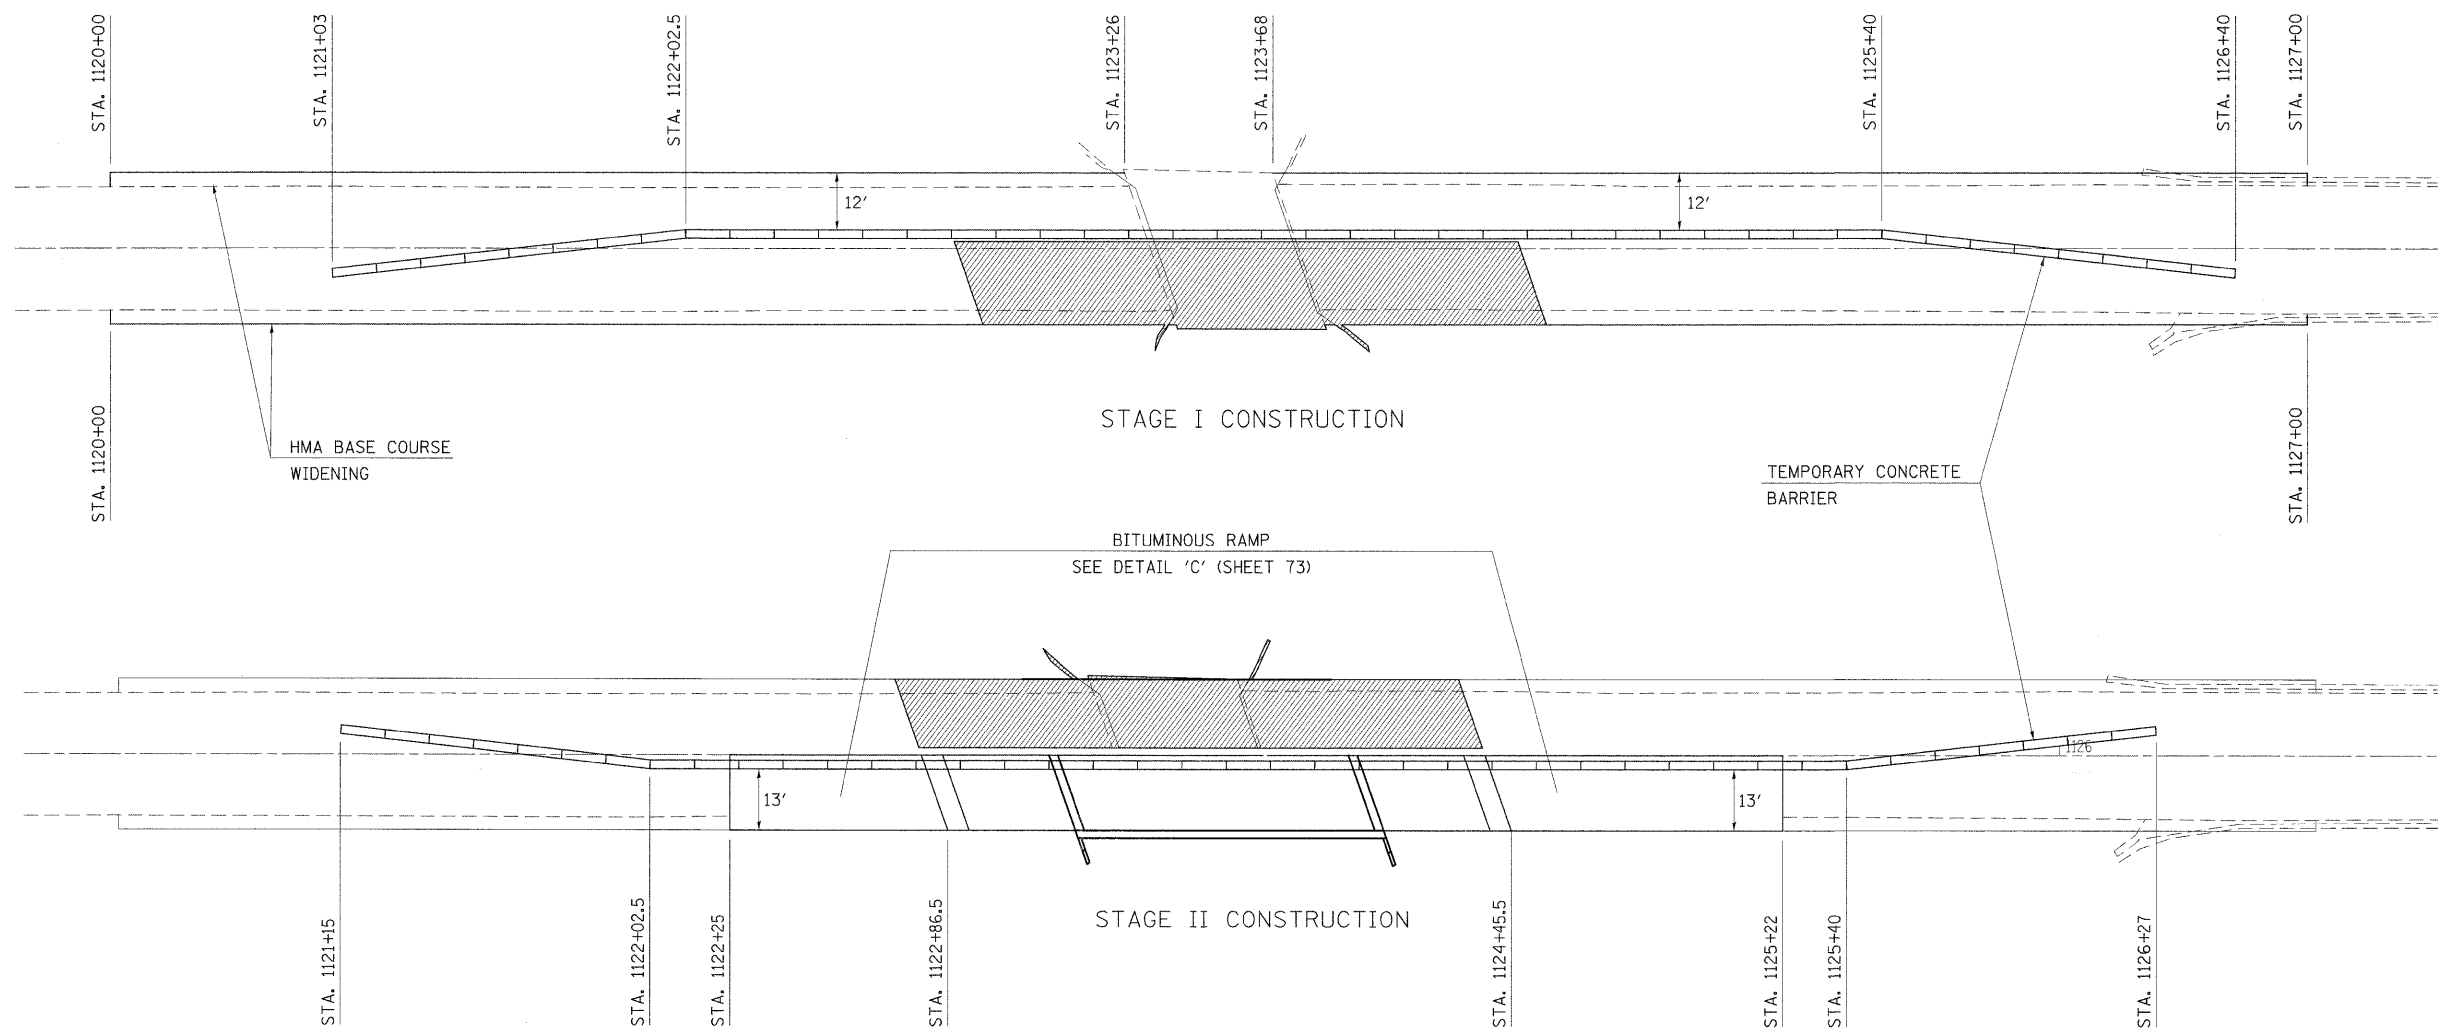

FILE NAME =	USER NAME = harbaughrd	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>STAGE CONSTRUCTION DETAILS (SN 031-0042)</b>	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
ct:\pw_work\pzdots\harbaughrd\dms51889\p	01506a.dgn	DRAWN -	REVISED -			761	104-BR-2	GREENE	82	45	
PLOT SCALE = 50,0000' / IN.		CHECKED -	REVISED -			SCALE: NTS    SHEET NO.    OF    SHEETS    STA.    TO STA.					
PLOT DATE = 12/18/2008		DATE -	REVISED -			FED. ROAD DIST. NO.    ILLINOIS FED. AID PROJECT    CONTRACT NO. 76987					