











LEGEND

	W1-4b-(O)-48 (NO. OF ARROW SHALL MATCH THE NO. OF LANES OPEN TO TRAFFIC AND THE DIRECTION OF TRAVEL.)
	W13-1-(O) -24
	4' x 8' 1" BORDER WITH 10" CAPITAL LETTERS BACKGROUND SHEETING SHALL BE THE SAME AS ALL DIAMOND SHAPED CONSTRUCTION SIGNS. (STATE OWNED)
	W1-6(O) 7236 ATOP TYPE III BARRICADE (DIRECTION OF ARROW SHALL MATCH DIRECTION OF TRAVEL.)
	G20-II03(O)-4830


LEGEND

	DRUM WITH STEADY BURNING LIGHT
	DIRECTION INDICATOR BARRICADE WITH STEADY BURNING LIGHT
	TYPE III BARRICADE WITH STEADY BURNING LIGHTS
	TEMPORARY CONCRETE BARRIER
	IMPACT ATTENUATORS



PRE-STAGE DESCRIPTION OF WORK
CHANGEABLE MESSAGE BOARDS SHALL BE PLACED 2 WEEKS PRIOR TO CONSTRUCTION.
RE-ESTABLISH SHOULDERS AND RAISE INLETS AT STRUCTURE.

STAGE I DESCRIPTION OF WORK
TRAFFIC CONTROL SHALL BE INSTALLED AS SHOWN IN THE PLANS. THE COST OF THIS TRAFFIC CONTROL SHALL BE INCLUDED IN THE PAY ITEM "TRAFFIC CONTROL AND PROTECTION."
TWO LANES OF THE ROADWAY SHALL BE OPENED ON THE RIGHT SIDE OF THE DIRECTION OF TRAFFIC.

SEQUENCE OF CONSTRUCTION, STAGE I
REMOVE SKIP-DASH AND CONFLICTING SOLID EDGE PAVEMENT MARKINGS.
PLACE TRAFFIC CONTROL DETAILS ACCORDING TO PLANS.
PLACE TEMPORARY CONCRETE BARRIER AND IMPACT ATTENUATORS, TEMPORARY.
PERFORM ALL NECESSARY BRIDGE WORK IN STAGE I WORK ZONE.

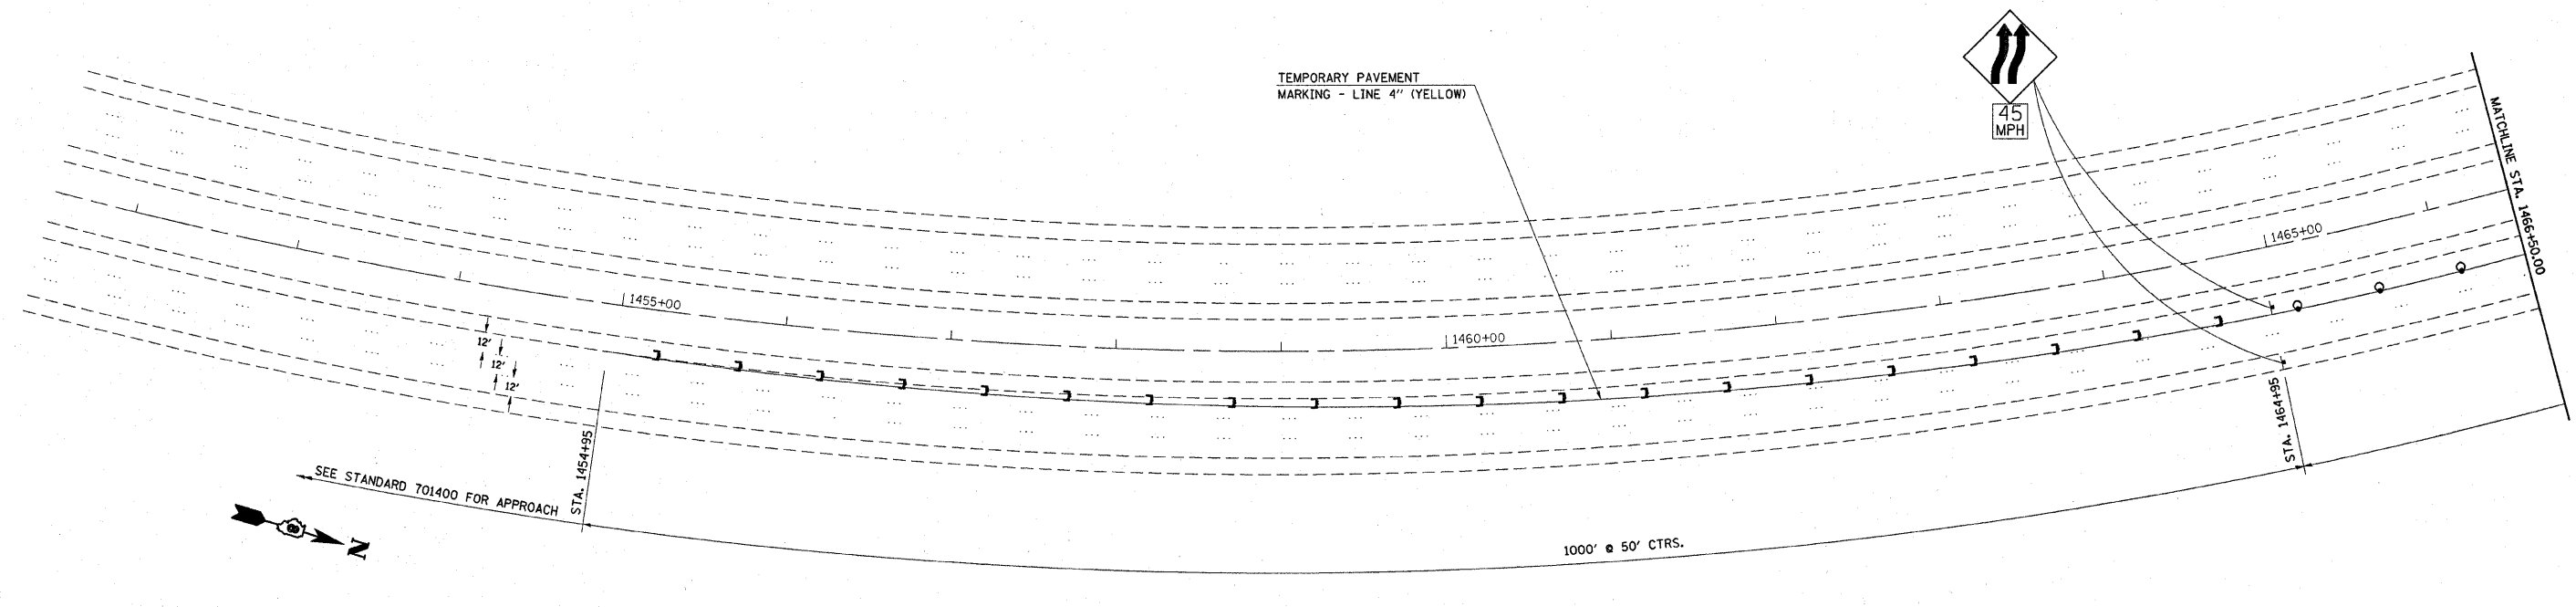

EXIST. CURVE 3
PI STA. = 1459+11.93
 $\Delta = 64^\circ 55' 19''$ (LT)
D = 2° 00' 00"
R = 2,864.79'
T = 1,822.33'
L = 3,246.10'
E = 530.49'
E = -----
T.R. = -----
S.E. RUN = -----
P.C. STA. = 1440+89.60
P.T. STA. = 1473+35.70



FILE NAME = c:\projects\ed06306\plan\stg06306a1.dgn	USER NAME = harbaughnd	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	STAGE I CONSTRUCTION, NORTH BOUND			F.A.I. RTE. 255	SECTION 60-8B-II	COUNTY MADISON	TOTAL SHEETS 42	SHEET NO. 7
	PLOT SCALE = 50.0000 / IN.	DRAWN -	REVISED -		SCALE: 50	SHEET NO. 7 OF 42 SHEETS	STA. 1451+50 TO STA. 1466+50	CONTRACT NO. 76A25				
	PLOT DATE = 12/20/2007	CHECKED -	REVISED -		FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT							
		DATE -	REVISED -									