SIGN DETAIL
1:75

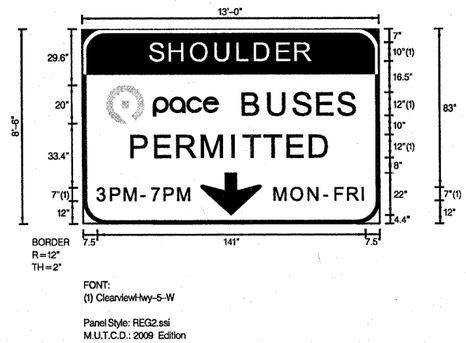

SIGN NUMBER	2B
WIDTH x HGHT.	13'-0" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: White
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black,White /Black

SYMBOL	ROT	X	Y	WID	HT
pace	0	12.5	52.4	59.4	20
ARDOWN	0	62	4.4	32	22

Panel Style: REG2.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																			LENGTH	SERIES/SIZE
S	H	O	U	L	D	E	R																													ClearviewHwy-5-W
35.9	46.4	57.7	70.5	82.2	91.3	102.9	112.6																												84.1	10
B	U	S	E	S																																ClearviewHwy-5-W
85.1	98.4	111.5	124.1	134.9																															58.4	12
P	E	R	M	I	T	T	E	D																												ClearviewHwy-5-W
26.2	38.7	50.4	63.5	79.3	85.2	96.2	108.5	120.2																											103.6	12
3	P	M	–	7	P	M																														ClearviewHwy-5-W
7.5	14.9	22.2	31.3	36.2	43.2	50.5																													49.4	7
M	O	N	–	F	R	I																														ClearviewHwy-5-W
101	109.9	118.9	127.4	132.9	139.5	147.2																													47.5	7

1/13/2011

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - SEW	REVISED -
		DRAWN - SEW	REVISED -
	PLOT SCALE = $SCALE$	CHECKED - ST	REVISED -
	PLOT DATE = $DATE$	DATE - 12/2010	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN DETAIL SHEETS
I-55 BUS ON SHOULDER PROJECT

SCALE: N.T.S. | SHEET NO. 3 OF 8 SHEETS

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55	*	COOK	197	173
*(0102-631, ETC. 0507-635K) RS-3		CONTRACT NO. 60164		
		ILLINOIS FED. AID PROJECT		