SIGN DETAIL
1:75

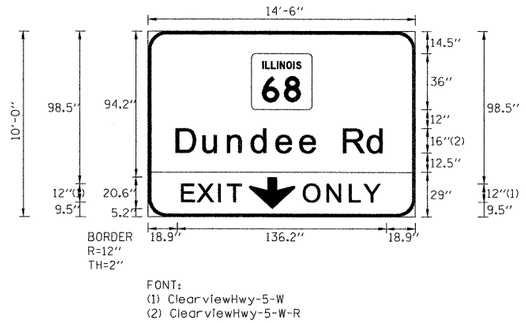

SIGN NUMBER	SB-53-CL-69	
WIDTH x HGHT.	14'-6" x 10'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
M1-I100A-2-22-10(1)	0	67.4	69.5	39.3	36
ARDOWN	0	65.7	5.2	30	20.6

Panel Style: Guide_1035.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																								LENGTH	SERIES/SIZE
D	u	n	d	e	e		R	d																																	ClearviewHwy-5-W-R
18.9	36.4	52.4	67.9	83.9	99.5	111.2	127.8	143.5																																136.2	16/13
E	X	I	T																																						ClearviewHwy-5-W
22.4	32.7	46.3	52.2																																					38.5	12
O	N	L	Y																																						ClearviewHwy-5-W
101.8	117.2	131.8	141.1																																					49.8	12

SD-17

FILE NAME = P:\2009\ME09006_VarVar PhII\CADD\W019_IL53\Shts\D160K21-sht-sgn_7.dgn
PLOT SCALE = 4.0000 ' / in.
PLOT DATE =
USER NAME = Millennia Professional Services

200 22ND Street, Suite 216, Lombard, IL 60148
630.705.0110 voice, 630.839.2566 fax
www.mps-il.com
MILLENNIA PROFESSIONAL SERVICES

DESIGNED -	CJD	REVISED -	
DRAWN -	CJD	REVISED -	
CHECKED -	TVN	REVISED -	
DATE -	1/3/2011	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ILLINOIS ROUTE 53
RAND ROAD TO LAKE COOK ROAD

SCALE: · SHEET NO. OF SHEETS STA. · TO STA.

SIGNING DETAILS
STA 469+44

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2592	2010-003 I	COOK	43	34
		CONTRACT NO. 60K21		

FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT

P:\2009\ME09006_VarVar PhII\CADD\W019_IL53\Shts\D160K21-sht-sgn_7.dgn