SIGN (1) PANEL
SB I-55 STA 120+97.00 (OVER NB LANES)
PR 8C082I055R002.2

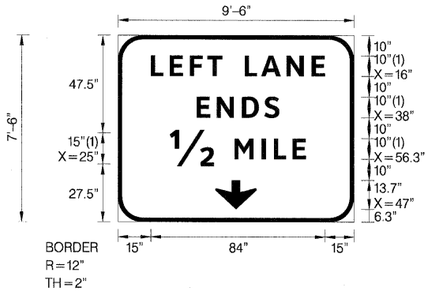

SIGN NUMBER	Sign Panel 1
WIDTH x HGHT.	9'-6" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Yellow
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT
ARDOWN	0	47	6.3	20	13.7

Dimensions are in inches.tenths
Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)															LENGTH	SERIES-SIZE
L	E	F	T		L	A	N	E								ClearviewHwy-5-W
16	25	34.7	43.1	50.3	61.3	69.2	81.5	93.7							84.1	10
E	N	D	S													ClearviewHwy-5-W
38	47.8	60	70.8												40	10
1/2	M	I	L	E												ClearviewHwy-5-W
24	55.3	68.5	74.4	83.4											65.8	15,10

SIGN (2) PANEL
SB I-55 STA 111+05.00 (OVER NB LANES)
EX 8S082I055R002.4

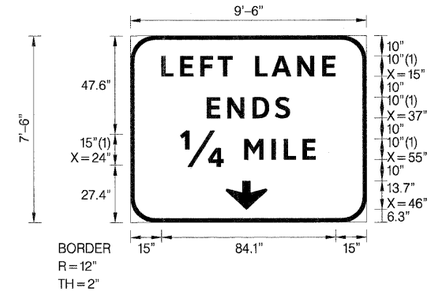

SIGN NUMBER	Sign Panel 2
WIDTH x HGHT.	9'-6" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Yellow
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT
ARDOWN	0	46	6.2	20	13.7

Dimensions are in inches.tenths
Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)															LENGTH	SERIES-SIZE
L	E	F	T		L	A	N	E								ClearviewHwy-5-W
15	24	33.8	42.2	49.3	60.3	68.3	80.5	92.7							84.1	10
E	N	D	S													ClearviewHwy-5-W
37	46.8	59	69.8												40	10
1/4	M	I	L	E												ClearviewHwy-5-W
24	55	68.1	74.1	83.1											65.5	15,10

FILE NAME = D8TR1-76C52-sht-signs-02.dgn	USER NAME = mmcconachie	DESIGNED - PMK	REVISED -
		DRAWN - PMK	REVISED -
	PLOT SCALE = 6.0000 ' / in.	CHECKED - MPW	REVISED -
	PLOT DATE = 1/19/2012	DATE - 1-20-12	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN PANEL DETAILS

SCALE: N/A | SHEET NO. 1 OF 17 SHEETS | STA. N/A | TO STA. N/A

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
•	82-1-R(A), 82-1-R(B)	ST. CLAIR	629	379
•64/998/70		CONTRACT NO. 76C52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		