


**ORCHARD ROAD
STAGE I**

STA. 123+64 TO STA. 126+77
 STA. 127+62 TO STA. 131+66
 STA. 144+40 TO STA. 146+29
 STA. 147+87 TO STA. 150+50

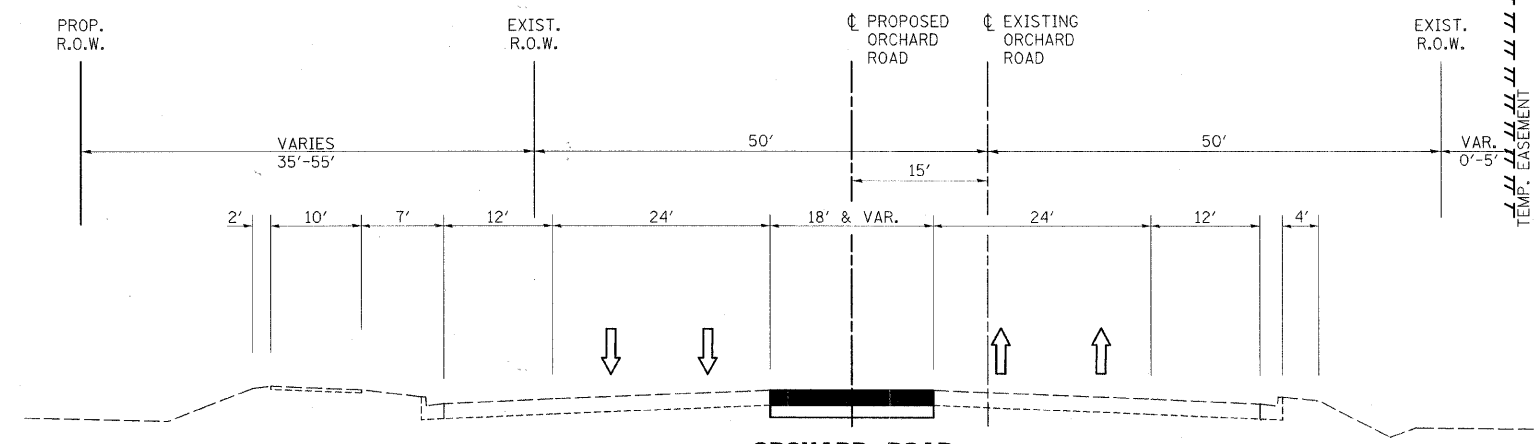

**ORCHARD ROAD
STAGE I**

STA. 170+63 TO STA. 175+20

PROJECT CONSTRUCTION STAGE I

TRAFFIC MAINTENANCE:


ORCHARD ROAD - TRAFFIC SHALL BE MAINTAINED ON THE EXISTING ORCHARD ROAD PAVEMENT.

SIDE STREETS - TRAFFIC SHALL BE MAINTAINED ON THE EXISTING SIDE STREET PAVEMENT.

THE FOLLOWING WORK ITEMS ARE TO BE COMPLETED DURING STAGE I:


- CONSTRUCT ALL TEMPORARY PAVEMENTS APPLYING STANDARD 701006 FOR TRAFFIC CONTROL AND PROTECTION.
- INSTALL TEMPORARY TRAFFIC SIGNALS AT ORCHARD AND AUCUTT INTERSECTION.
- REMOVE MEDIAN CURB AND GUTTER FROM STA. 172+62.60 TO 175+19.60.
- MODIFY TEMPORARY TRAFFIC SIGNALS AT ORCHARD AND ROCHESTER INTERSECTION.
- EARTHWORK MAY BEGIN FOR FLOODPLAIN COMPENSATORY STORAGE AND STORMWATER DETENTION.

SEE STAGE IV TYPICAL SECTIONS AND NOTES FOR ADDITIONAL MAINTENANCE OF TRAFFIC NOTES.

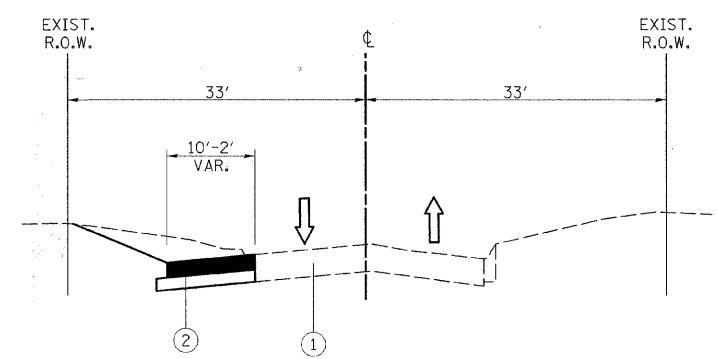


**COUNTRYSIDE ROAD
STAGE I**

STA. 60+29 TO STA 62+11

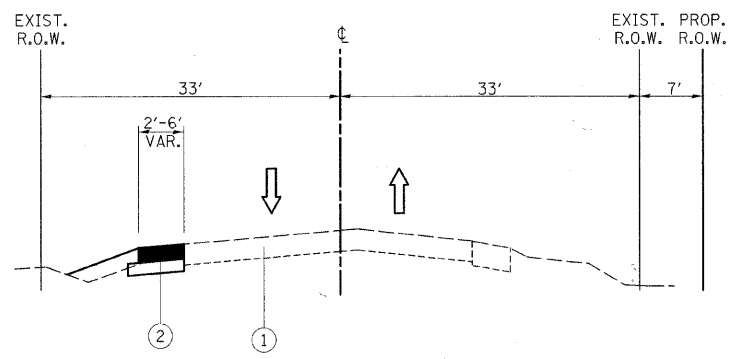


**AUCUTT ROAD
STAGE I**

STA. 72+27 TO STA 74+70

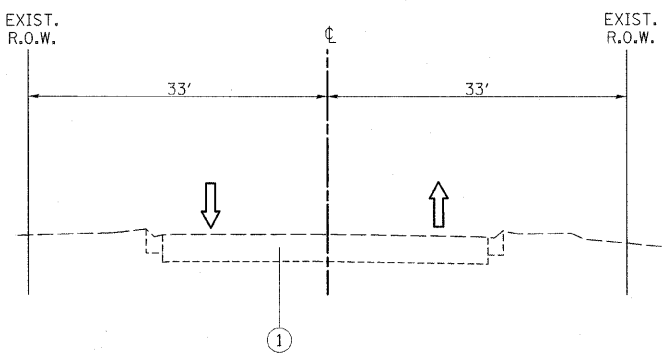


**KNELL ROAD
STAGE I**

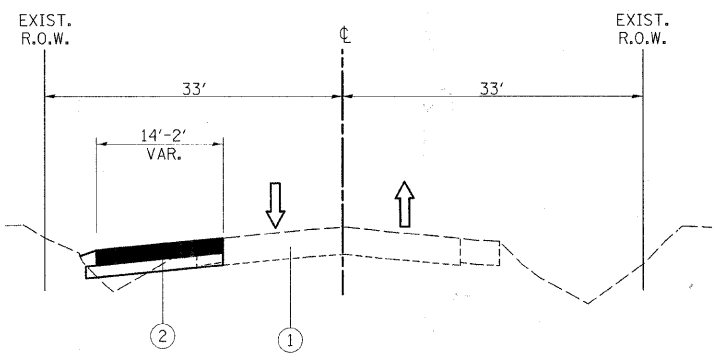

**ROCHESTER DRIVE
STAGE I**

STA. 30.46 TO STA 35+30

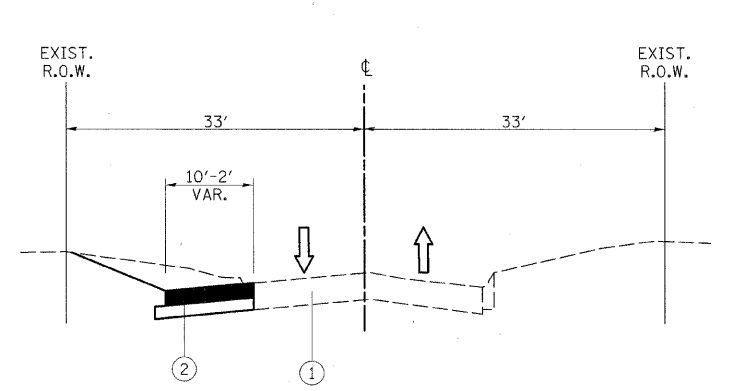

**COUNTRYSIDE ROAD
STAGE I**

LEGEND

- ① EXISTING PAVEMENT
- ② TEMPORARY PAVEMENT, 10" WITH SUB-BASE GRANULAR MATERIAL, TYPE B, 4" (INCIDENTAL TO TEMPORARY PAVEMENT)
- ③ PROPOSED PAVEMENT
- ④ TEMPORARY PAVEMENT MARKING