

STAGE 1 CONSTRUCTION

PHASE 1

- 1. UTILIZE TRAFFIC CONTROL AND PROTECTION, STANDARD 701321 AND 701321.
- 2. PLACE TEMPORARY TRAFFIC CONTROL AS SHOWN ON THE DETAILS.
- 3. INSTALL TEMPORARY TRAFFIC SIGNALS PRIOR TO CLOSING THE WESTBOUND LANE OF THE ROADWAY. SEE "TRAFFIC CONTROL NOTES" FOR MORE DETAILS.

PHASE 2

- 1. UTILIZE TRAFFIC CONTROL AND PROTECTION, STANDARD 701321 TO DIRECT TRAFFIC TO THE EASTBOUND SIDE OF I-3. CONSTRUCT TEMPORARY SHEET PILING AT THE EAST AND WEST SIDE OF THE EXISTING STRUCTURE. REMOVE THE WESTBOUND SIDE OF THE STRUCTURE.
- 2. CONSTRUCT THE WESTBOUND SIDE OF THE BRIDGE STRUCTURE, EMBANKMENT AT EAST AND WEST SIDES OF THE PROPOSED STRUCTURE, APPROACH PAVEMENT, AND FULL-DEPTH SHOULDERS.
- 3. INSTALL GUARDRAIL ON WESTBOUND SIDE OF I-3 AND COMPLETE DRAINAGE AND GRADING IMPROVEMENTS.

TRAFFIC CONTROL NOTES

- 1. TWO PHASE SIGNAL OPERATION IS REQUIRED WHEN HWY STD 701321 IS IN EFFECT. THE ENGINEER OF TRAFFIC SHALL APPROVE ALL TIMING PARAMETERS.
- 2. THE CONTRACTOR WILL HAVE THE OPTION TO USE MICROWAVE DETECTION FOR USE WITH THE TEMPORARY TRAFFIC SIGNALS IN ACCORDANCE WITH HWY STD 701321.
- 3. REMOVAL OF THE RUMBLE STRIPS AFTER STAGED CONSTRUCTION SHALL BE COMPLETED PRIOR TO THE END OF THE PROJECT. ANY DAMAGE TO THE EXISTING PAVEMENT FROM THE RUMBLE STRIPS SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE. THERE WILL BE NO ADDITIONAL COMPENSATION.
- 4. ALL TEMPORARY PAVEMENT MARKINGS, DRUMS, ETC. SHALL BE PLACED PRIOR TO PLACING TEMPORARY CONCRETE BARRIERS.
- 5. THE TEXAS TRAFFIC RAIL-TYPE T631 SHALL BE CONNECTED TO THE TEMPORARY CONCRETE BARRIER AT STA. 529+75.00 AND STA. 537+25.00 WITH A TRAFFIC BARRIER TERMINAL TYPE 11. SEE STANDARD 631051 FOR DETAILS. NO SALVAGE VALUE.

NOTES FOR TRAFFIC CONTROL & PROTECTION STANDARD 701321

- ALL ITEMS BELOW SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE. EACH FOR TRAFFIC CONTROL AND PROTECTION, STANDARD 701321. NO OTHER COMPENSATION WILL BE ALLOWED.
- 1. ALL SIGNAGE AS SHOWN ON THE HIGHWAY STANDARD AND ADDITIONAL SIGNAGE SHOWN ON THE STAGE 1 DETAIL. THE NOTED WORK SHALL INCLUDE SIGNS, POSTS, HARDWARE AND LABOR. THE CONTRACTOR SHALL ERECT THE SIGNS AT THE LOCATIONS ON THE DETAIL AND AT LOCATIONS DIRECTED BY THE ENGINEER.
 - 2. THE PLACEMENT AND REMOVAL OF THE TEXAS TRAFFIC RAIL - TYPE T631 SHOWN ON THE STAGE 1 DETAIL AND IN THE STRUCTURE PLANS STAGE CONSTRUCTION DETAILS.
 - 3. PER ARTICLE 703.07, WHEN TEMPORARY PAVEMENT MARKING IS SHOWN ON THE STANDARD AND DETAIL, THE COST OF TEMPORARY PAVEMENT MARKING AND ITS REMOVAL WILL BE INCLUDED IN THE COST OF THE STANDARD.
 - 4. ALL TEMPORARY DRUMS OR BARRICADES SHOWN ON THE HIGHWAY STANDARD AND AS SHOWN ON THE DETAIL.

NOTES FOR WIDE LOAD SIGN

THE CONTRACTOR SHALL FURNISH THE POST AND ERECT THE SIGN AT THE NECESSARY LOCATION AS DIRECTED BY THE ENGINEER. THE SIGN SHALL BE POST MOUNTED.

THE ABOVE NOTED WORK, INCLUDING SIGNS, POSTS, HARDWARE, AND LABOR SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE. EACH, FOR TRAFFIC CONTROL AND PROTECTION, STANDARD 701321, AND NO OTHER COMPENSATION WILL BE ALLOWED.

FOR WORK ON ALL STRUCTURES, THE WIDTH SHOWN ON THE W12-1103 SIGN SHALL BE 11'-0" OR DIRECTED BY THE ENGINEER. THE "X" MILES AHEAD WILL BE DETERMINED BY THE ENGINEER.

WIDE LOAD SIGN


MAX WIDTH

XX'-XX"

XX MILES AHEAD

W12-1103 (48 X 48)

SERIES D ALPHABET, NO BORDER, BLACK ON WHITE


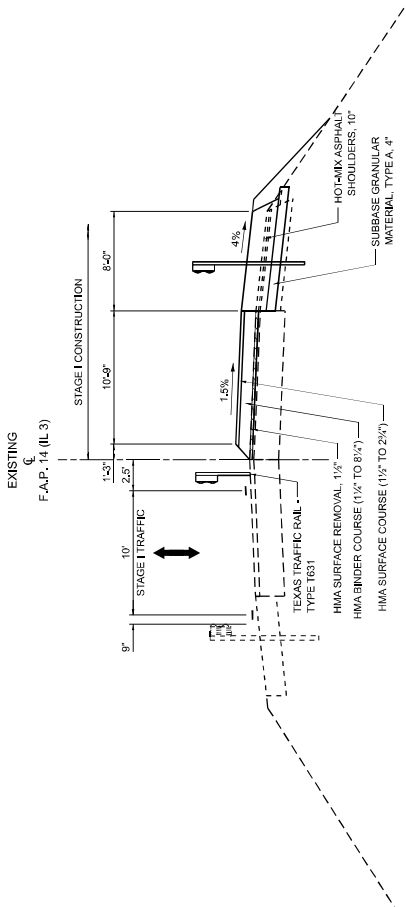


STAGE 1 CONSTRUCTION

(LOOKING WEST)

REV. 6-1-2026

	USER NAME	DESIGNED	M.E.C.	REVISED	STATE OF ILLINOIS			F.A.P. 14 (ILLINOIS ROUTE 3)			F.A.P. FILE	SECTION	COUNTY	SHEET NO.							
					DEPARTMENT OF TRANSPORTATION			MAINTENANCE OF TRAFFIC - STAGE I													
														SCALE: SHEET 1 OF 3 SHEETS STA.			11/10/17			CONTRACT NO. 78791	

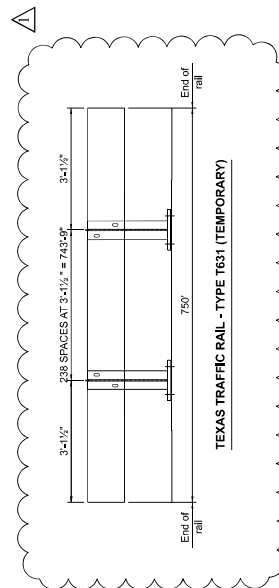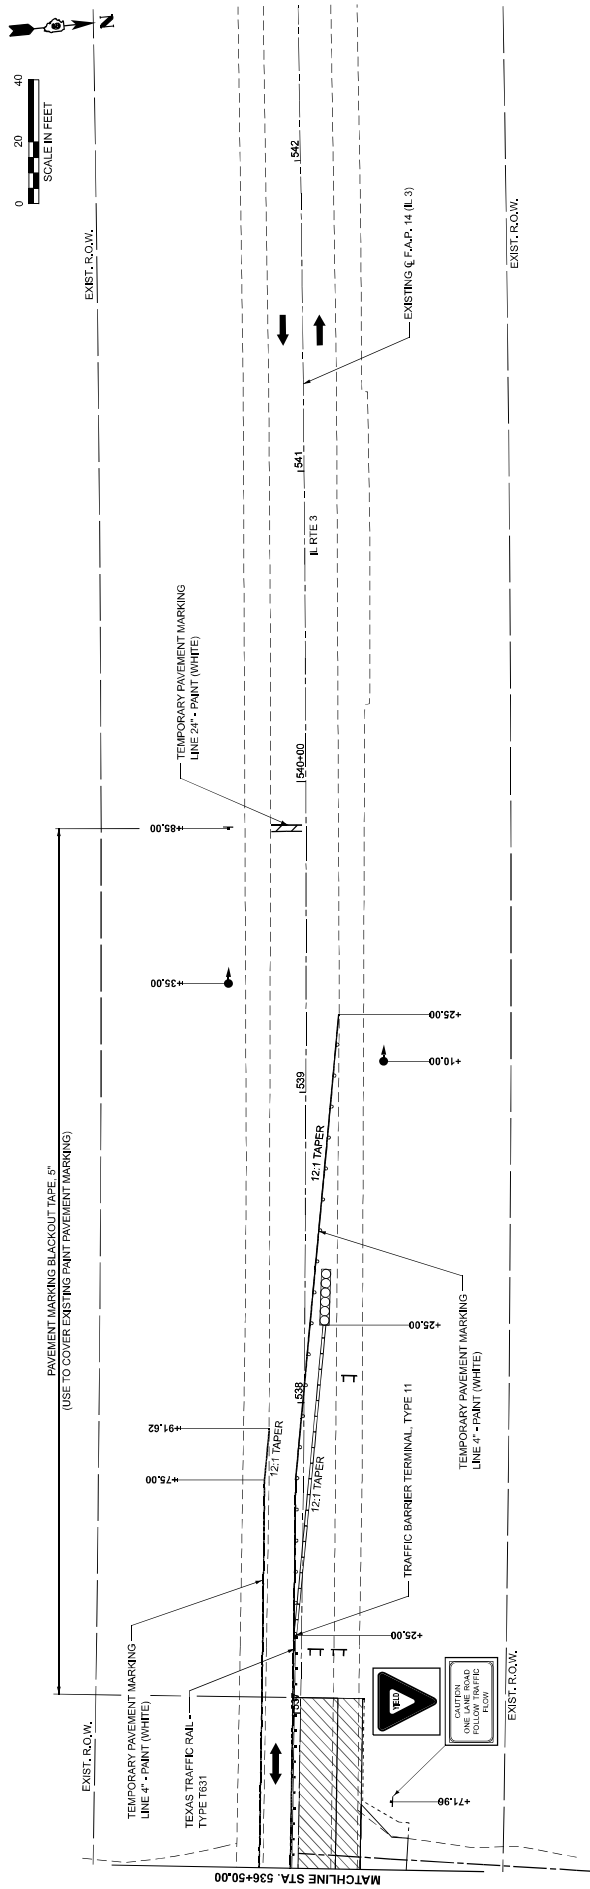

LEGEND	
	WORK ZONE
	EDGE DRUMS
	TEMPORARY SIGN
	TYPE III BARRICADE
	IMPACT ATTENUATOR, TEMPORARY (NON-REDUCTIVE, NARROW), TEST LEVEL 3
	TEMPORARY CONCRETE BARRIER
	TEMPORARY TRAFFIC SIGNAL

	UNIFORM # Main Overlay		RE-PAVED - SECTION - RE-PAVED - RE-PAVED - DATE - 2/22/2006	5/1/2005 - - - 6/1/2006	COUNTY ALEXANDER 82 25	SECTION 130-(B-2) 14	TOTAL SHEETS 25	CONTRACT NO. 28701 130-(B-2)
	PROJECT NAME - 6/1/2006		DATE - 2/22/2006	DATE - 5/1/2005	COUNTY ALEXANDER 82 25	SECTION 130-(B-2) 14	TOTAL SHEETS 25	CONTRACT NO. 28701 130-(B-2)