PART OF THE SE 1/4 OF SEC. 28, TWP. 43 N., R. 8 E. OF THE 3RD. P.M., IN McHENRY COUNTY, ILLINOIS.

EXISTING R.O.W. RECORDED INFORMATION		
Parcel	Document No.	Date Recorded
1FH0016	94R 055444	September 23, 1994
1FH0016	2000R0039470	July 24, 2000
1FH0016	2000R0065911	December 1, 2000
----	228149	February 2, 1950
----	94R 055444	September 23, 1994
----	1999R0051344	July 16, 1999
----	2001R0016865	March 21, 2001
----	2001R0064390	August 4, 2001

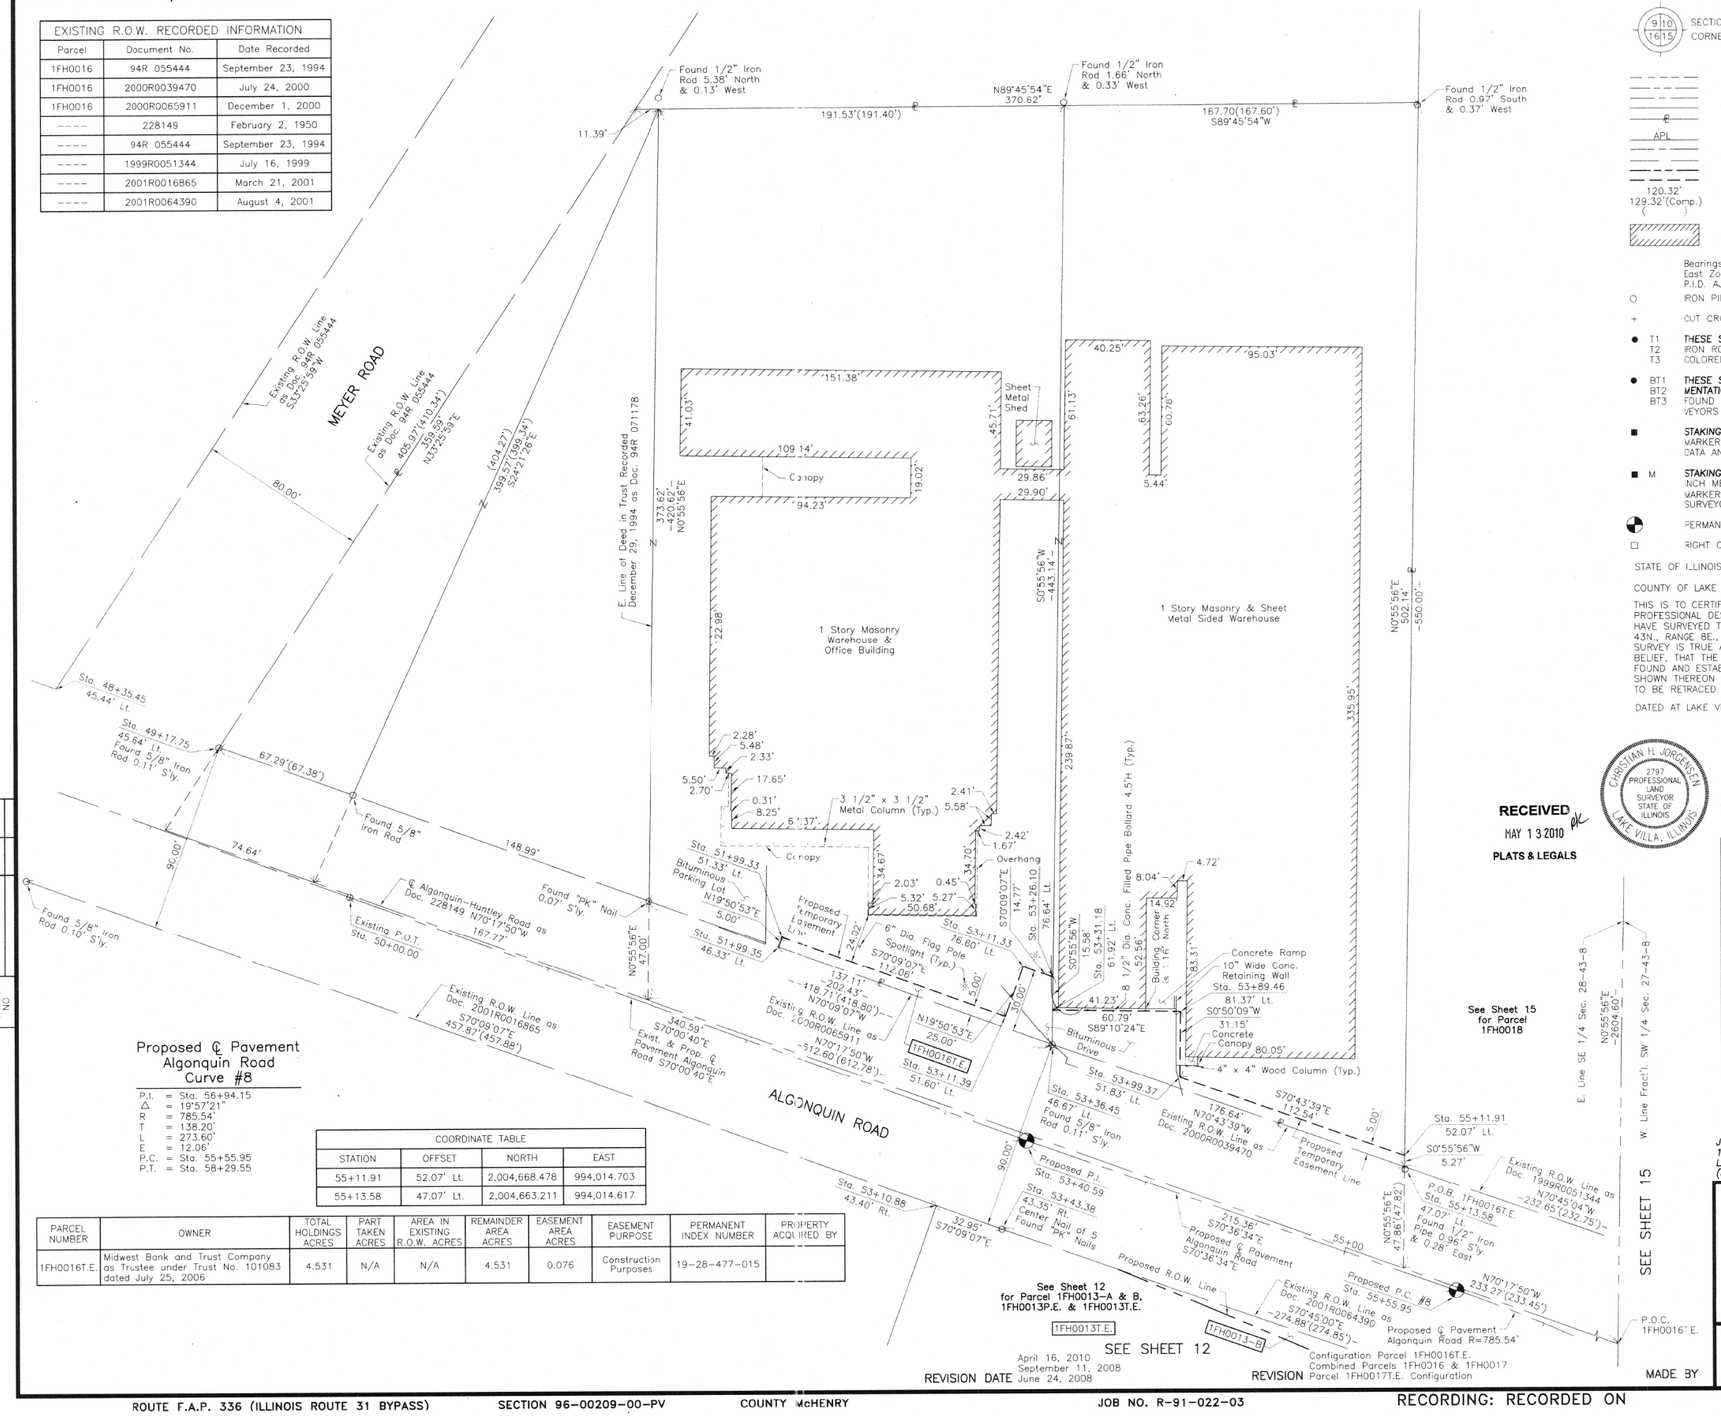

Proposed ℄ Pavement
Algonquin Road
Curve #8

P.I. = Sta. 56+94.15
Δ = 19°57'21"
R = 785.54'
T = 138.20'
L = 273.60'
E = 12.06'
P.C. = Sta. 55+55.95
P.T. = Sta. 58+29.55

COORDINATE TABLE			
STATION	OFFSET	NORTH	EAST
55+11.91	52.07' Lt.	2,004,668.478	994,014.703
55+13.58	47.07' Lt.	2,004,663.211	994,014.617

PARCEL NUMBER	OWNER	TOTAL HOLDINGS ACRES	PART TAKEN ACRES	AREA IN EXISTING R.O.W. ACRES	REMAINDER AREA ACRES	EASEMENT AREA ACRES	EASEMENT PURPOSE	PERMANENT INDEX NUMBER	PROPERTY ACQUIRED BY
1FH0016T.E.	Midwest Bank and Trust Company as Trustee under Trust No. 101083 dated July 25, 2006	4.531	N/A	N/A	4.531	0.076	Construction Purposes	19-28-477-015	

LEGEND

SECTION CORNER (9 10 16 15)
QUARTER SECTION CORNER (16 15)

SECTION LINE
QUARTER SECTION LINE
QUARTER, QUARTER SECTION LINE
PLATTED LOT LINE
PROPERTY (DEED) LINE
APPARENT PROPERTY LINE
CENTER LINE
EXISTING RIGHT OF WAY LINE
PROPOSED RIGHT OF WAY LINE
PROPOSED EASEMENT
120.32' MEASURED DIMENSION
129.32'(Comp.) COMPUTED DIMENSION
( ) RECORD DATA
EXISTING BUILDING

N

0 30' 60'
SCALE: 1"=30'

Bearings are referenced to the Illinois Coordinate System NAD83 (1997) East Zone at Found Geodetic Survey Control Monuments "MCH31 1A", P.I.D. AJ2855 and "Algonquin", P.I.D. AJ2945.

○ IRON PIPE OR ROD FOUND
⊕ "MAG" NAIL SET
+ CUT CROSS FOUND OR SET
● 5/8" REBAR SET

● T1 T2 T3 **THESE STAKES REFERENCE FOUND OR SET MONUMENTATION.** SET 5/8 INCH IRON ROD FLUSH WITH GROUND TO TIE FOUND IRON STAKE. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER.

● BT1 BT2 BT3 **THESE STAKES, IN CULTIVATED AREAS, REFERENCE FOUND OR SET MONUMENTATION.** BURIED 5/8 INCH IRON ROD 20 INCHES BELOW GROUND TO TIE FOUND IRON STAKE. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER.

■ **STAKING OF PROPOSED RIGHT OF WAY.** SET DIVISION OF HIGHWAYS SURVEY MARKER TO MONUMENT THE POSITION SHOWN. IDENTIFIED BY INSCRIPTION DATA AND SURVEYORS REGISTRATION NUMBER.

■ M **STAKING OF PROPOSED RIGHT OF WAY IN CULTIVATED AREAS.** BURIED 5/8 INCH METAL ROD 20 INCHES BELOW GROUND TO MARK FUTURE SURVEY MARKER POSITION IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER.

PERMANENT SURVEY MARKER, I.D.O.T STD 2135 (TO BE SET BY OTHERS)

□ RIGHT OF WAY STAKING PROPOSED TO BE SET.

STATE OF ILLINOIS)
)SS
COUNTY OF LAKE)

THIS IS TO CERTIFY THAT WE, JORGENSEN & ASSOCIATES, INC., AN ILLINOIS PROFESSIONAL DESIGN FIRM LAND SURVEYING CORPORATION, NUMBER 184-2771, HAVE SURVEYED THE PLAT OF HIGHWAYS SHOWN HEREON IN SECTION 28, TOWNSHIP 43N., RANGE 8E., OF THE THIRD PRINCIPAL MERIDIAN, McHENRY COUNTY, THAT THE SURVEY IS TRUE AND COMPLETE AS SHOWN TO THE BEST OF MY KNOWLEDGE AND BELIEF, THAT THE PLAT CORRECTLY REPRESENTS SAID SURVEY, THAT ALL MONUMENTS FOUND AND ESTABLISHED ARE OF PERMANENT QUALITY AND OCCUPY THE POSITIONS SHOWN THEREON AND THAT THE MONUMENTS ARE SUFFICIENT TO ENABLE THE SURVEY TO BE RETRACED. MADE FOR THE DEPARTMENT OF TRANSPORTATION, STATE OF ILLINOIS.

DATED AT LAKE VILLA, ILLINOIS THIS 18th DAY OF May 2010 A.D.

Christian H. Jorgensen PRESIDENT
ILLINOIS PROFESSIONAL LAND SURVEYOR NO. 35-2797
LICENSE EXPIRATION DATE: NOVEMBER 30, 2006

THIS PROFESSIONAL SERVICE CONFORMS TO THE CURRENT ILLINOIS MINIMUM STANDARDS FOR A BOUNDARY SURVEY.

COORDINATES ARE BASED ON THE PUBLISHED METRIC COORDINATE VALUES AT FOUND GEODETIC SURVEY CONTROL MONUMENT "MCH31 1A", P.I.D. AJ2855, OF N.613,205.182-E.303,895.917.
NOTE: SURFACE COORDINATES ARE SHOWN

CHRISTIAN H. JORGENSEN 2797 PROFESSIONAL LAND SURVEYOR STATE OF ILLINOIS LAKE VILLA, ILLINOIS

RECEIVED MAY 13 2010 PLATS & LEGALS

COORDINATE TABLE			
STATION	OFFSET	NORTH	EAST
48+35.45	45.44' Lt.	2,004,891.619	993,376.630
49+17.75	45.64' Lt.	2,004,863.675	993,454.043
51+99.33	51.33' Lt.	2,004,772.767	993,720.613
51+99.35	46.33' Lt.	2,004,768.064	993,718.915
53+10.88	43.40' Rt.	2,004,645.617	993,793.059
53+11.33	76.60' Lt.	2,004,758.235	993,834.502
53+11.39	51.60' Lt.	2,004,734.720	993,826.014
53+26.10	76.64' Lt.	2,004,753.222	993,848.392
53+31.18	61.92' Lt.	2,004,737.648	993,848.139
53+36.45	46.67' Lt.	2,004,721.513	993,847.876
53+43.38	43.35' Rt.	2,004,634.429	993,824.051
53+89.46	81.37' Lt.	2,004,736.771	993,908.921
53+99.37	51.83' Lt.	2,004,705.624	993,908.467

JORGENSEN & ASSOCIATES, INC.
120 PARK AVENUE
LAKE VILLA, ILLINOIS 60046
(847) 356-3371

SHEET 1 IS A COVER SHEET AND IS NOT RECORDED.

PLAT OF HIGHWAYS
STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

F.A.P. 336 (ILLINOIS ROUTE 31 BYPASS)

SECTION 96-00209-00-PV McHENRY COUNTY
PROJECT JOB NO. R-91-022-03
STATION 48+00 TO STATION 56+00
SCALE: 1"=30' SHEET 14 OF 37

BUREAU OF LAND ACQUISITION
201 WEST CENTER COURT
SCHAUMBURG, ILLINOIS 60196

ROW PLAT	MADE	CHECKED	INKED	NOTEBOOK NO.	BY	DATE

REVISION DATE April 16, 2010 September 11, 2008 June 24, 2008
REVISION

MADE BY

ROUTE F.A.P. 336 (ILLINOIS ROUTE 31 BYPASS) SECTION 96-00209-00-PV COUNTY McHENRY JOB NO. R-91-022-03

RECORDING: RECORDED ON AS DOCUMENT NO.

FILE NAME = ...\D160F72-sht-PH-17.dgn	USER NAME = akw	DESIGNED -	REVISED -
		DRAWN - JORGENSEN & ASSOC.	REVISED -
	PLOT SCALE = 70.0000 ' / in.	CHECKED - CJ	REVISED -
	PLOT DATE = 5/2/2012	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PLAT OF HIGHWAYS

SCALE: GRAPHIC | SHEET NO. 17 OF 49 SHEETS | STA. | TO STA.

O.R. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0003	18A-2	MCHENRY	825	426
		CONTRACT NO. 60F72		

FED. ROAD DIST. NO. 1 | ILLINOIS | FED. AID PROJECT