


***18I,(18BRY&18BRY-1)BR,18B-1

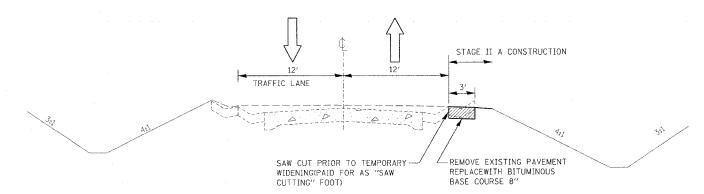

STAGE II A STA. 3+80 TO STA. 12+50 STA. 96+00 TO STA. 113+00

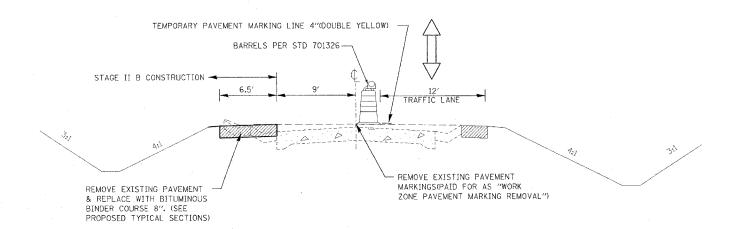

STAGE II B STA. 4+73 TO STA. 9+62 STA. 97+60 TO STA. 111+86

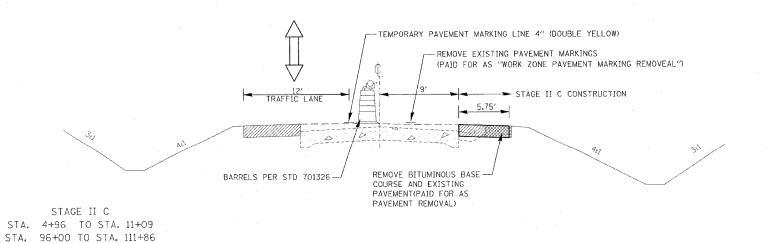

STAGE II A. B & C CONSTRUCTION

INSTALL 3 FT TEMPORARY WIDENING BETWEEN RT STA 4+96 TO 11+09 AND 96+00 TO 111+86

RESTRIPE DOUBLE YELLOW, SHIFT TRAFFIC TO THE WEST AND SAWCUT AND REMOVE EXISTING PAVEMENTBETWEEN LT STA 4+73 TO 9+62 AND 97+60 TO 111+86.

PLACE BITUMINOUS BINDER COURSE 8"

RESTRIPE DOUBLE YELLOW AND SHIFT TRAFFIC 3 FT EAST FROM EXISTING CENTERLINE.

SAWCUT AND REMOVE EXISTING PAVEMENT AND TEMPORARY WIDENING BETWEEN RT STA 4+96 TO 11+09 AND 96+00 TO 111+86

PLACE BITUMINOUS BINDER COURSE 8"

FOR STAGES II B & C, TAPER
TEMPORARY PAVEMENT MARKING AT 1:50 RATE TO TIE BACK INTO EXISTING CENTERLINE

REMOVE TEMPORARY PAVEMENT MARKINGS AND RESTRIPE ¢ WITH TEMPORARY PAVEMENT MARKING LINE 4"(DOUBLE YELLOW).

STAGE II A. B & C TRAFFIC CONTROL

USE STD. 701326 FOR STAGE IIA PAID FOR AS "TC&P STD 701326 - L SUM"

USE STD. 701326 FOR STAGE IIB

MOVE BARRELS TO WIDENING TRENCH AT END OF DAY PAID FOR AS "TC&P STD 701326 - L SUM"

USE STD. 701326 FOR STAGE IIC MOVE BARRELS TO WIDENING TRENCH AT END OF DAY PAID FOR AS "TC&P STD 701326 - L SUM"

ILLINOIS DEPARTMENT OF TRANSPORTATION STAGE II A, B, & C CONSTRUCTION TYPICAL SECTIONS SCALE: VERT. DRAWN BY DATE CHECKED BY

DATE NAME SCALE NAME