


STAGE II REMOVAL

Looking North
Dimensions at Rt. Angles to $\text{\textcircled{C}}$ Barney Drive

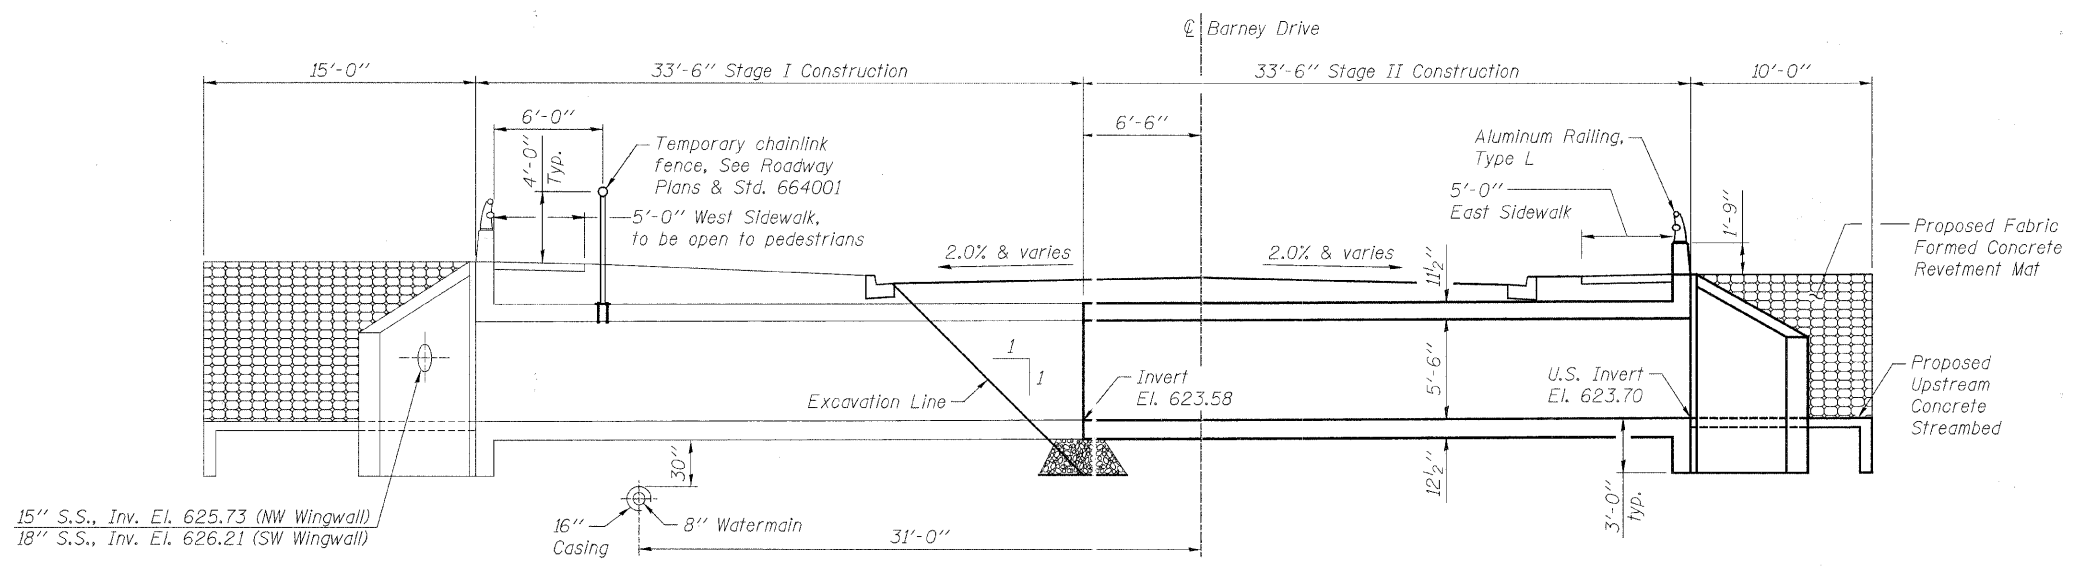

STAGE II CONSTRUCTION

Looking North
Dimensions at Rt. Angles to $\text{\textcircled{C}}$ Barney Drive

STAGE CONSTRUCTION SEQUENCE

- 1.) Excavate behind existing Stage II box culvert per cross-section.
- 2.) Remove existing box culvert, pavement, sidewalk, and curb & gutter within the Stage II Removal Limits.
- 3.) Relocate/Construct/Install any necessary utility items (e.g. watermain & storm sewer pipes) within the Stage II construction limits.
- 4.) Construct proposed Stage II box culvert and aluminum railing as shown per plans.
- 5.) Backfill around sides of proposed Stage II box culvert.
- 6.) Construct proposed upstream revetment mat, streambed concrete, sidewalk, and pipe handrail.
- 7.) Construct proposed roadway pavement/traffic lane and curb & gutter.
- 8.) Remove temporary pedestrian safety fence.

NOTES:

Hatched area indicates existing structure removal.
Temporary chainlink fence shall be provided for Stage Construction. See Roadway Plans.

FILE NAME = S:\PROJECTS\2010\1201010\BarneyDrivePH\DESIGN\STRUCT\1201010_03-04_Construction Staging Details.dgn

USER NAME =	DESIGNED - PETER PASCUA	REVISED -
PLOT SCALE =	CHECKED - BRIAN CONVERSE	REVISED -
PLOT DATE =	DRAWN - RON ALLEN	REVISED -
	CHECKED - BRIAN CONVERSE	REVISED -

**ILLINOIS DEPARTMENT OF TRANSPORTATION
BARNEY DRIVE OVER TRIBUTARY OF ROCK RUN
STATION 20 + 00**

**CONSTRUCTION STAGING DETAILS - STAGE II
STRUCTURE NO. 099-6474**
STRUCTURAL SHEET NO. 4 OF 11 SHEETS

F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
0330	08-00413-00-BR	WILL	33	18
WHA# 1201010		CONTRACT NO. 63571		
ILLINOIS FED. AID PROJECT BRM-99031621				