SIGN DETAIL

1:60

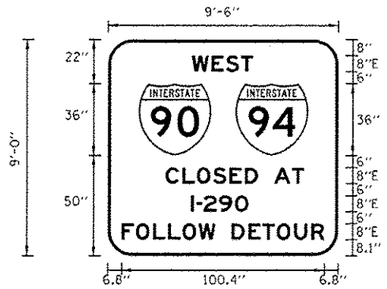

BORDER
R=12"
TH=1.5"

Dimensions are in inches.tenths
Letter locations are panel edge to lower left corner

SIGN NUMBER	TC-SGN-14
WIDTH x HGHT.	9'-6" x 9'-0"
BORDER WIDTH	1.5"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Orange
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	15.1	50	36	36
M1_1	0	63.1	50	36	36

LETTER POSITIONS (X)

																LENGTH	SERIESSIZE
W	E	S	T														E 2000
41.3	51.2	58.3	65.7													30.3	8
C	L	O	S	E	D		A	T									E 2000
28.6	36.9	44	52.1	60.2	67.8	74.3	82.3	91.1								68.5	8
I	-	2	9	0													E 2000
41.1	43.8	47.4	55	62.9												28.5	8
F	O	L	L	O	W		D	E	T	O	U	R					E 2000
6.8	13.9	22.5	29.9	37	44.8	53.3	61.3	69.6	76.5	83.6	92.2	100.7				100.4	8

SIGN DETAIL

1:60



BORDER
TH=1"
IN=1"

Dimensions are in inches.tenths
Letter locations are panel edge to lower left corner

SIGN NUMBER	TC-SGN-15
WIDTH x HGHT.	10'-0" x 2'-0"
BORDER WIDTH	1"
CORNER RADIUS	0"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Orange
LEGEND/BORDER	TYPE: Reflective
	COLOR: Black/Black

SYMBOL	ROT	X	Y	WID	HT

LETTER POSITIONS (X)

																LENGTH	SERIESSIZE
R	O	A	D		C	L	O	S	E	D							C 2000
12.9	21.4	29.9	39.3	46	58	67.1	74.7	83.6	92.3	100.5						94.3	12

AECOM
303 EAST WACKER DRIVE, SUITE 1400
CHICAGO, IL 60601-5276
PHONE: (312) 373-7700 FAX: (312) 373-6800

D168w28-sht-Staging-Sign-Det-04A.dgn	DESIGNED - AFC	REVISED - ⚠ 05/27/2014	
USER NAME = potelp2	DRAWN - NSA	REVISED -	
PLOT SCALE = 1.0020 ' / in.	CHECKED - KCF	REVISED -	
PLOT DATE = 5/24/2014	DATE - 04/28/14	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUGGESTED STAGES OF CONSTRUCTION AND TRAFFIC CONTROL
TEMPORARY INFORMATION SIGNING

SCALE: NTS | SHEET 5 OF 5 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
90/94/290	2013-010R	COOK	747	92E
		CONTRACT NO. 60W28		
		ILLINOIS FED. AID PROJECT		