PART OF THE NE¼ OF SECTION 1 T1S, R9W, OF THE 3RD PM, ST. CLAIR COUNTY, ILLINOIS

PARCEL NO.	OWNER	TOTAL HOLDING	FEE SIMPLE ACQUISITION						REMAINDER	EASEMENTS			PERMANENT TAX NUMBER	PROPERTY ACQUIRED BY DOC. NO.
			GROSS		PREVIOUSLY DEDICATED		NET			PE = PERMANENT TE = TEMPORARY		EASEMENT PURPOSE		
		ACRES	ACRES	SQ. FT.	ACRES	SQ. FT.	ACRES	SQ. FT.	ACRES	ACRES	SQ. FT.			
8308160	Roger L. Tuepker & Gail A. Tuepker, husband & wife, as tenants by the entirety Book 3730, Page 1439 Title Report Number SC-6034 & SC-4390	1.9990							1.9990	TE=0.0138	TE=600	ENTRANCE CONSTRUCTION	12-01-0-200-008 12-01-0-200-009	A02147078
8308161	Carol L. Krausz, as trustee under provisions of a trust agreement dated the 27th day of June, 1992, known as the Carol L. Krausz Declaration of Trust Book 2895, Page 778 Title Report Number SC-5915	11.7539	0.0407	1,773					11.7132				12-01-0-200-022	
8308162	Dale E. Keck, a widower Book 3763, Page 436 Title Report Number SC-5937	1.4401	0.0344	1,498					1.4057				12-01-0-200-023	
8308163	Mabel A. R. Otten Book 2337, Page 2185 Title Report Number SC-5938	1.5542	0.0567	2,468					1.4975				12-01-0-200-024	
8308164	Thomas Welker & Diane Welker, husband and wife, as joint tenants Book 2556, Page 144 Title Report Number SC-5916	1.4302	0.1256	5,471	0.1096	4,772	0.0160	699	1.3046	TE-1=0.0362 TE-2=0.0065	TE-1=1,576 TE-2=282	TE-1 = ENTRANCE CONSTRUCTION & GRADING TE-2 = GRADING	12-01-0-200-007	A02141730
8308165	Eric C. Priest, a single man Book 3912, Page 1673 Title Report Number SC-4396	1.4702							1.4702	TE=0.0156	TE=677	ENTRANCE CONSTRUCTION	12-01-0-200-014	

BEARINGS SHOWN HEREON ARE BASED ON SURVEY CONTROL DATA AS PROVIDED BY THE ILLINOIS DEPARTMENT OF TRANSPORTATION.

FAP ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO
809	133,134 RS-5, 135 RS-6	MONROE/ ST. CLAIR	762	174
STA.	575+00	TO STA.	590+00	

CONTRACT NO.: 76408 & 76A47

R-98-008-03

LEGEND

- SECTION CORNER
- QUARTER SECTION CORNER
- EXISTING CENTERLINE
- EXISTING RIGHT OF WAY LINE
- EXISTING EASEMENT LINE
- PROPOSED CENTERLINE
- PROPOSED RIGHT OF WAY LINE
- PROPOSED TEMPORARY EASEMENT LINE
- PROPOSED PERMANENT EASEMENT LINE
- SECTION LINE
- QUARTER SECTION LINE
- QUARTER QUARTER SECTION LINE
- PROPERTY (DEED) LINE
- APL — APPARENT PROPERTY LINE
- 121.45' — MEASURED DIMENSION
- 123.45' (COMP) — COMPUTED DIMENSION
- (123.45') — RECORDED DIMENSION
- FOUND IRON PIPE OR IRON ROD AT CORNER UNLESS OTHERWISE NOTED
- SET ⅝ INCH IRON ROD AT CORNER UNLESS OTHERWISE NOTED
- PERMANENT SURVEY MONUMENT, I.D.O.T. STD. 667101 (TO BE SET BY OTHERS)
- CUT CROSS FOUND OR SET
- FOUND RIGHT OF WAY MARKER
- N89°21'38"W 120.00' — PROPOSED ℄ OF CONSTRUCTION BEARING AND DISTANCE
- SAME OWNERSHIP
- EXISTING BUILDING

■ STAKING OF PROPOSED RIGHT OF WAY. SET ⅝ INCH METAL ROD WITH DIVISION OF HIGHWAY SURVEY MARKER TO MONUMENT THE POSITION SHOWN. IDENTIFIED BY INSCRIPTION DATA AND SURVEYORS REGISTRATION NUMBER. (PROPOSED RIGHT OF WAY CORNERS SET IN CULTIVATED AREAS SHALL BE A MINIMUM OF 20 INCHES BELOW THE GROUND SURFACES).

ALL DETAILS SHOWN NOT TO SCALE UNLESS OTHER WISE NOTED

STATE OF MISSOURI)
) SS
CITY OF ST. LOUIS)

I, RONNIE D. LOWE, AN ILLINOIS PROFESSIONAL LAND SURVEYOR, CERTIFY THAT I HAVE SURVEYED THE PLAT OF HIGHWAY SHOWN HEREON AND THAT THIS PROFESSIONAL SERVICE CONFORMS TO THE CURRENT ILLINOIS MINIMUM STANDARDS FOR A BOUNDARY SURVEY FOR THE PROPOSED PARCEL(S) TO BE ACQUIRED BY THE STATE OF ILLINOIS, DEPARTMENT OF TRANSPORTATION, SHOWN HEREON.

DATED _____

RONNIE D. LOWE, PLS NO. 035-003363
LICENSE EXPIRATION DATE: 11/30/2010

DAVID MASON & ASSOCIATES OF ILLINOIS, LTD.
Engineering
Architecture
Surveying
800 South Vandeventer Avenue
St. Louis, MO 63110
(314) 534-1030
ILLINOIS LICENCE NO: 184-000485
Expiration Date: April 30, 2011

ILLINOIS DEPARTMENT OF TRANSPORTATION
PLAT OF HIGHWAYS
FAP ROUTE 809 (IL 158)
SECTION (133,134) RS-5, 135 RS-6
MONROE AND ST. CLAIR COUNTY
JOB NO. R-98-008-03

STATION 575+00 TO STATION 590+00

50' 0 50' 100'
SCALE: 1" = 50'

ILLINOIS DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS/DISTRICT 8
1102 EASTPORT PLAZA DRIVE
COLLINSVILLE, ILLINOIS 62234-6198

SHEET 1 IS A COVER SHEET

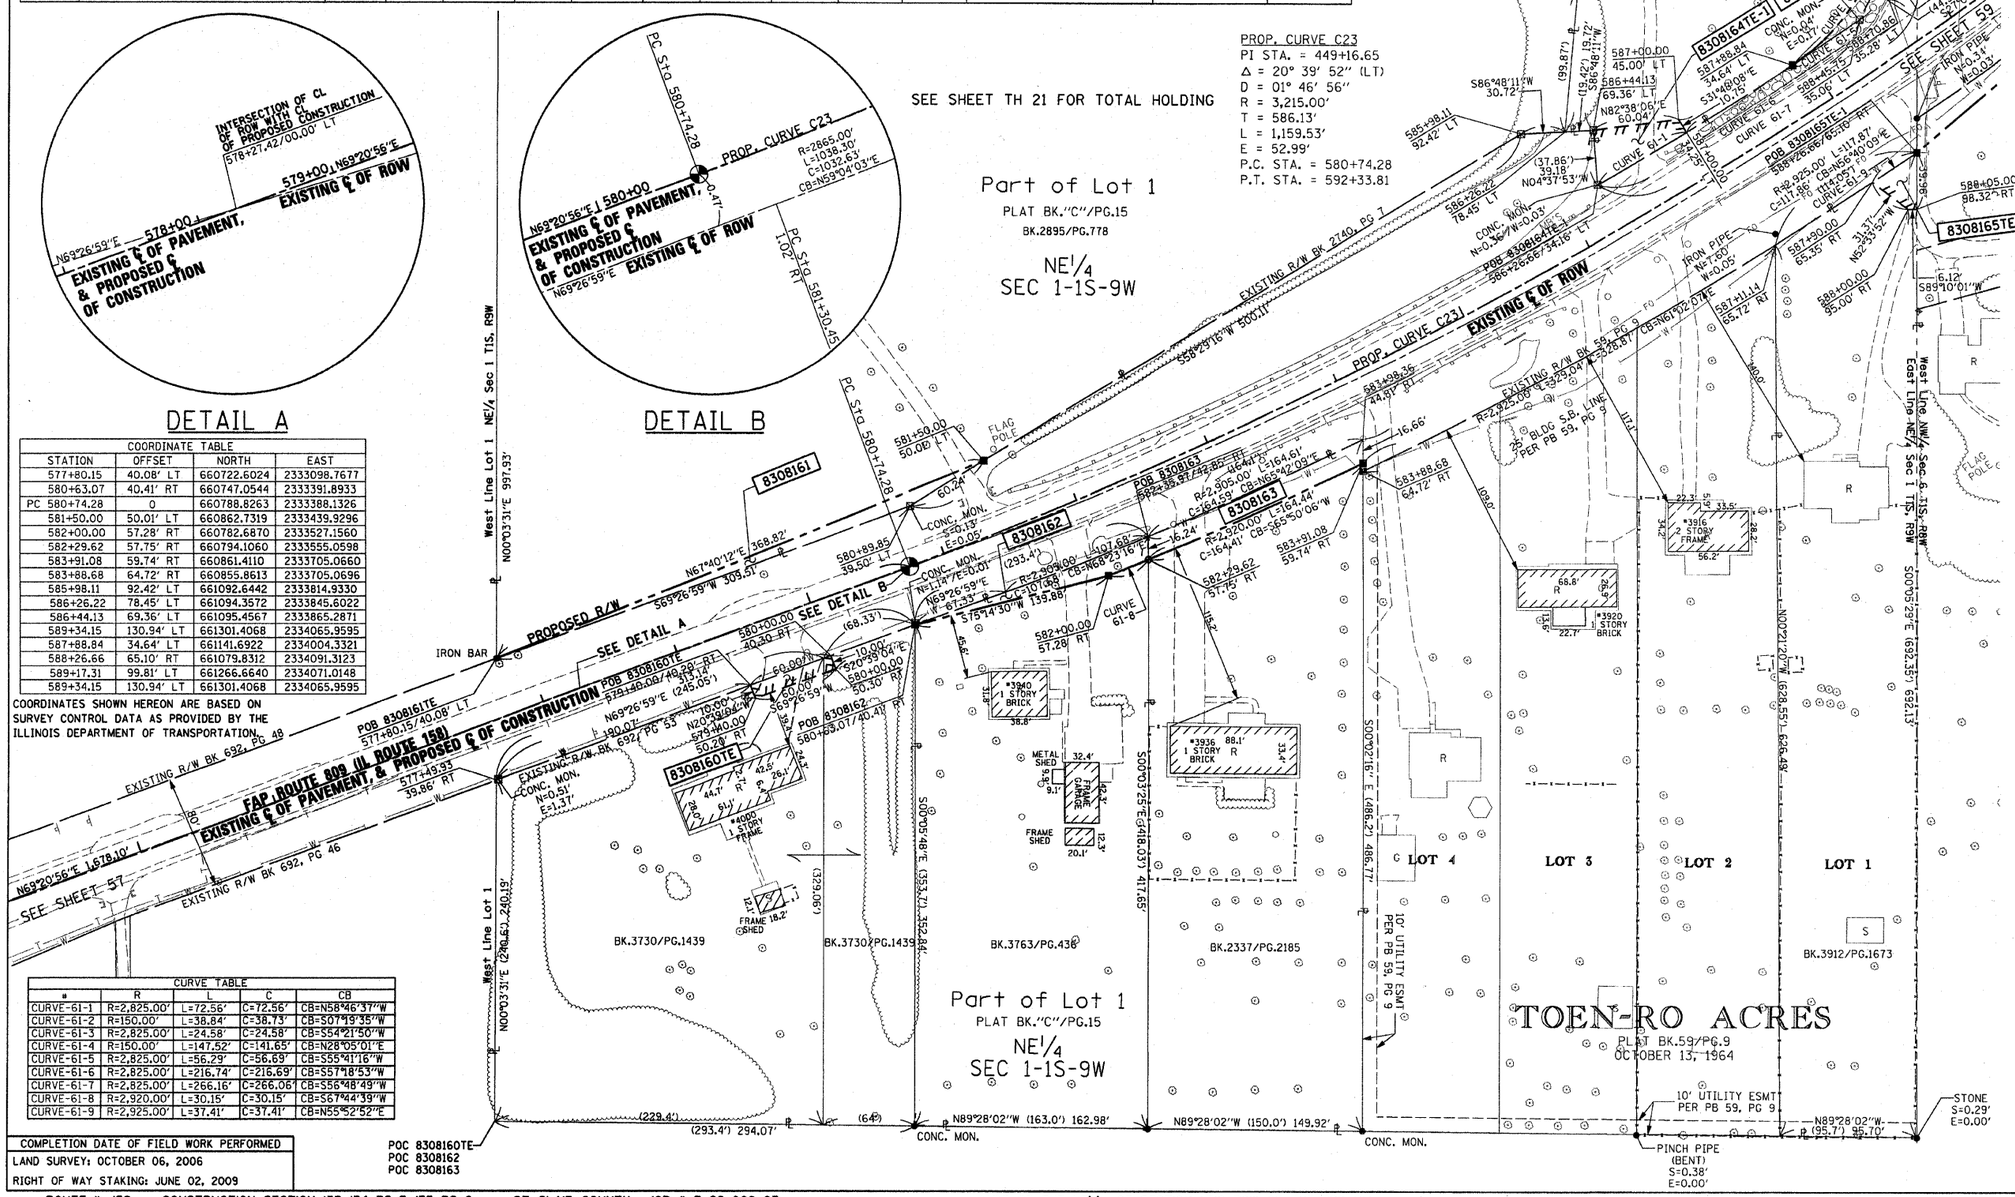

COORDINATE TABLE			
STATION	OFFSET	NORTH	EAST
577+80.15	40.08' LT	660722.6024	2333098.7677
580+63.07	40.41' RT	660747.0544	2333391.8933
PC 580+74.28	0	660788.8263	2333388.1326
581+50.00	50.01' LT	660862.7319	2333439.9296
582+00.00	57.28' RT	660782.6870	2333527.1560
582+29.62	57.75' RT	660794.1060	2333555.0598
583+91.08	59.74' RT	660861.4110	2333705.0660
583+88.68	64.72' RT	660855.8613	2333705.0696
585+98.11	92.42' LT	661092.6442	2333814.9330
586+26.22	78.45' LT	661094.3572	2333845.6022
586+44.13	69.36' LT	661095.4567	2333865.2871
589+34.15	130.94' LT	661301.4068	2334065.9595
587+88.84	34.64' LT	661141.6922	2334004.3321
588+26.66	65.10' RT	661079.8312	2334091.3123
589+17.31	99.81' LT	661266.6640	2334071.0148
589+34.15	130.94' LT	661301.4068	2334065.9595

COORDINATES SHOWN HEREON ARE BASED ON SURVEY CONTROL DATA AS PROVIDED BY THE ILLINOIS DEPARTMENT OF TRANSPORTATION.

CURVE TABLE				
#	R	L	C	CB
CURVE-61-1	R=2,825.00'	L=72.56'	C=72.56'	CB=N58°46'37"W
CURVE-61-2	R=150.00'	L=38.84'	C=38.73'	CB=S07°19'35"W
CURVE-61-3	R=2,825.00'	L=24.58'	C=24.58'	CB=S54°21'50"W
CURVE-61-4	R=150.00'	L=147.52'	C=141.65'	CB=N28°05'01"E
CURVE-61-5	R=2,825.00'	L=56.29'	C=56.69'	CB=S55°41'16"W
CURVE-61-6	R=2,825.00'	L=216.74'	C=216.69'	CB=S57°18'53"W
CURVE-61-7	R=2,825.00'	L=266.16'	C=266.06'	CB=S56°48'49"W
CURVE-61-8	R=2,920.00'	L=30.15'	C=30.15'	CB=S67°44'39"W
CURVE-61-9	R=2,925.00'	L=37.41'	C=37.41'	CB=N55°52'52"E

COMPLETION DATE OF FIELD WORK PERFORMED
LAND SURVEY: OCTOBER 06, 2006
RIGHT OF WAY STAKING: JUNE 02, 2009

NO.	DATE	DESCRIPTION	BY

$$$$DATE$$
•DATE-TIME•
•DGN-SPEC•
•REF•
•REF•
•REF•
•REF•