PART OF THE SE 1/4 OF SEC. 31, TWP. 44 N., R. 8 E. OF THE 3RD. P.M., IN McHENRY COUNTY, ILLINOIS.

PARCEL NUMBER	OWNER	TOTAL HOLDINGS ACRES	PART TAKEN ACRES	AREA IN EXISTING R.O.W. ACRES	REMAINDER AREA ACRES	EASEMENT AREA ACRES	EASEMENT AREA SQUARE FEET	EASEMENT PURPOSE	PERMANENT INDEX NUMBER	PROPERTY ACQUIRED BY
1CV0221 1CV0221T.E.	McHenry County, a Body Politic	3.155	0.181	N/A	2.974	0.004	179	Construction Purposes	14-31-451-037	
1CV0224 1CV0224T.E.	Syed Sajjad Asghar and Shahwar F. Syed, his wife, in joint tenancy	2.793	0.124	N/A	2.669	0.034	N/A	Driveway Construction	14-31-451-038	

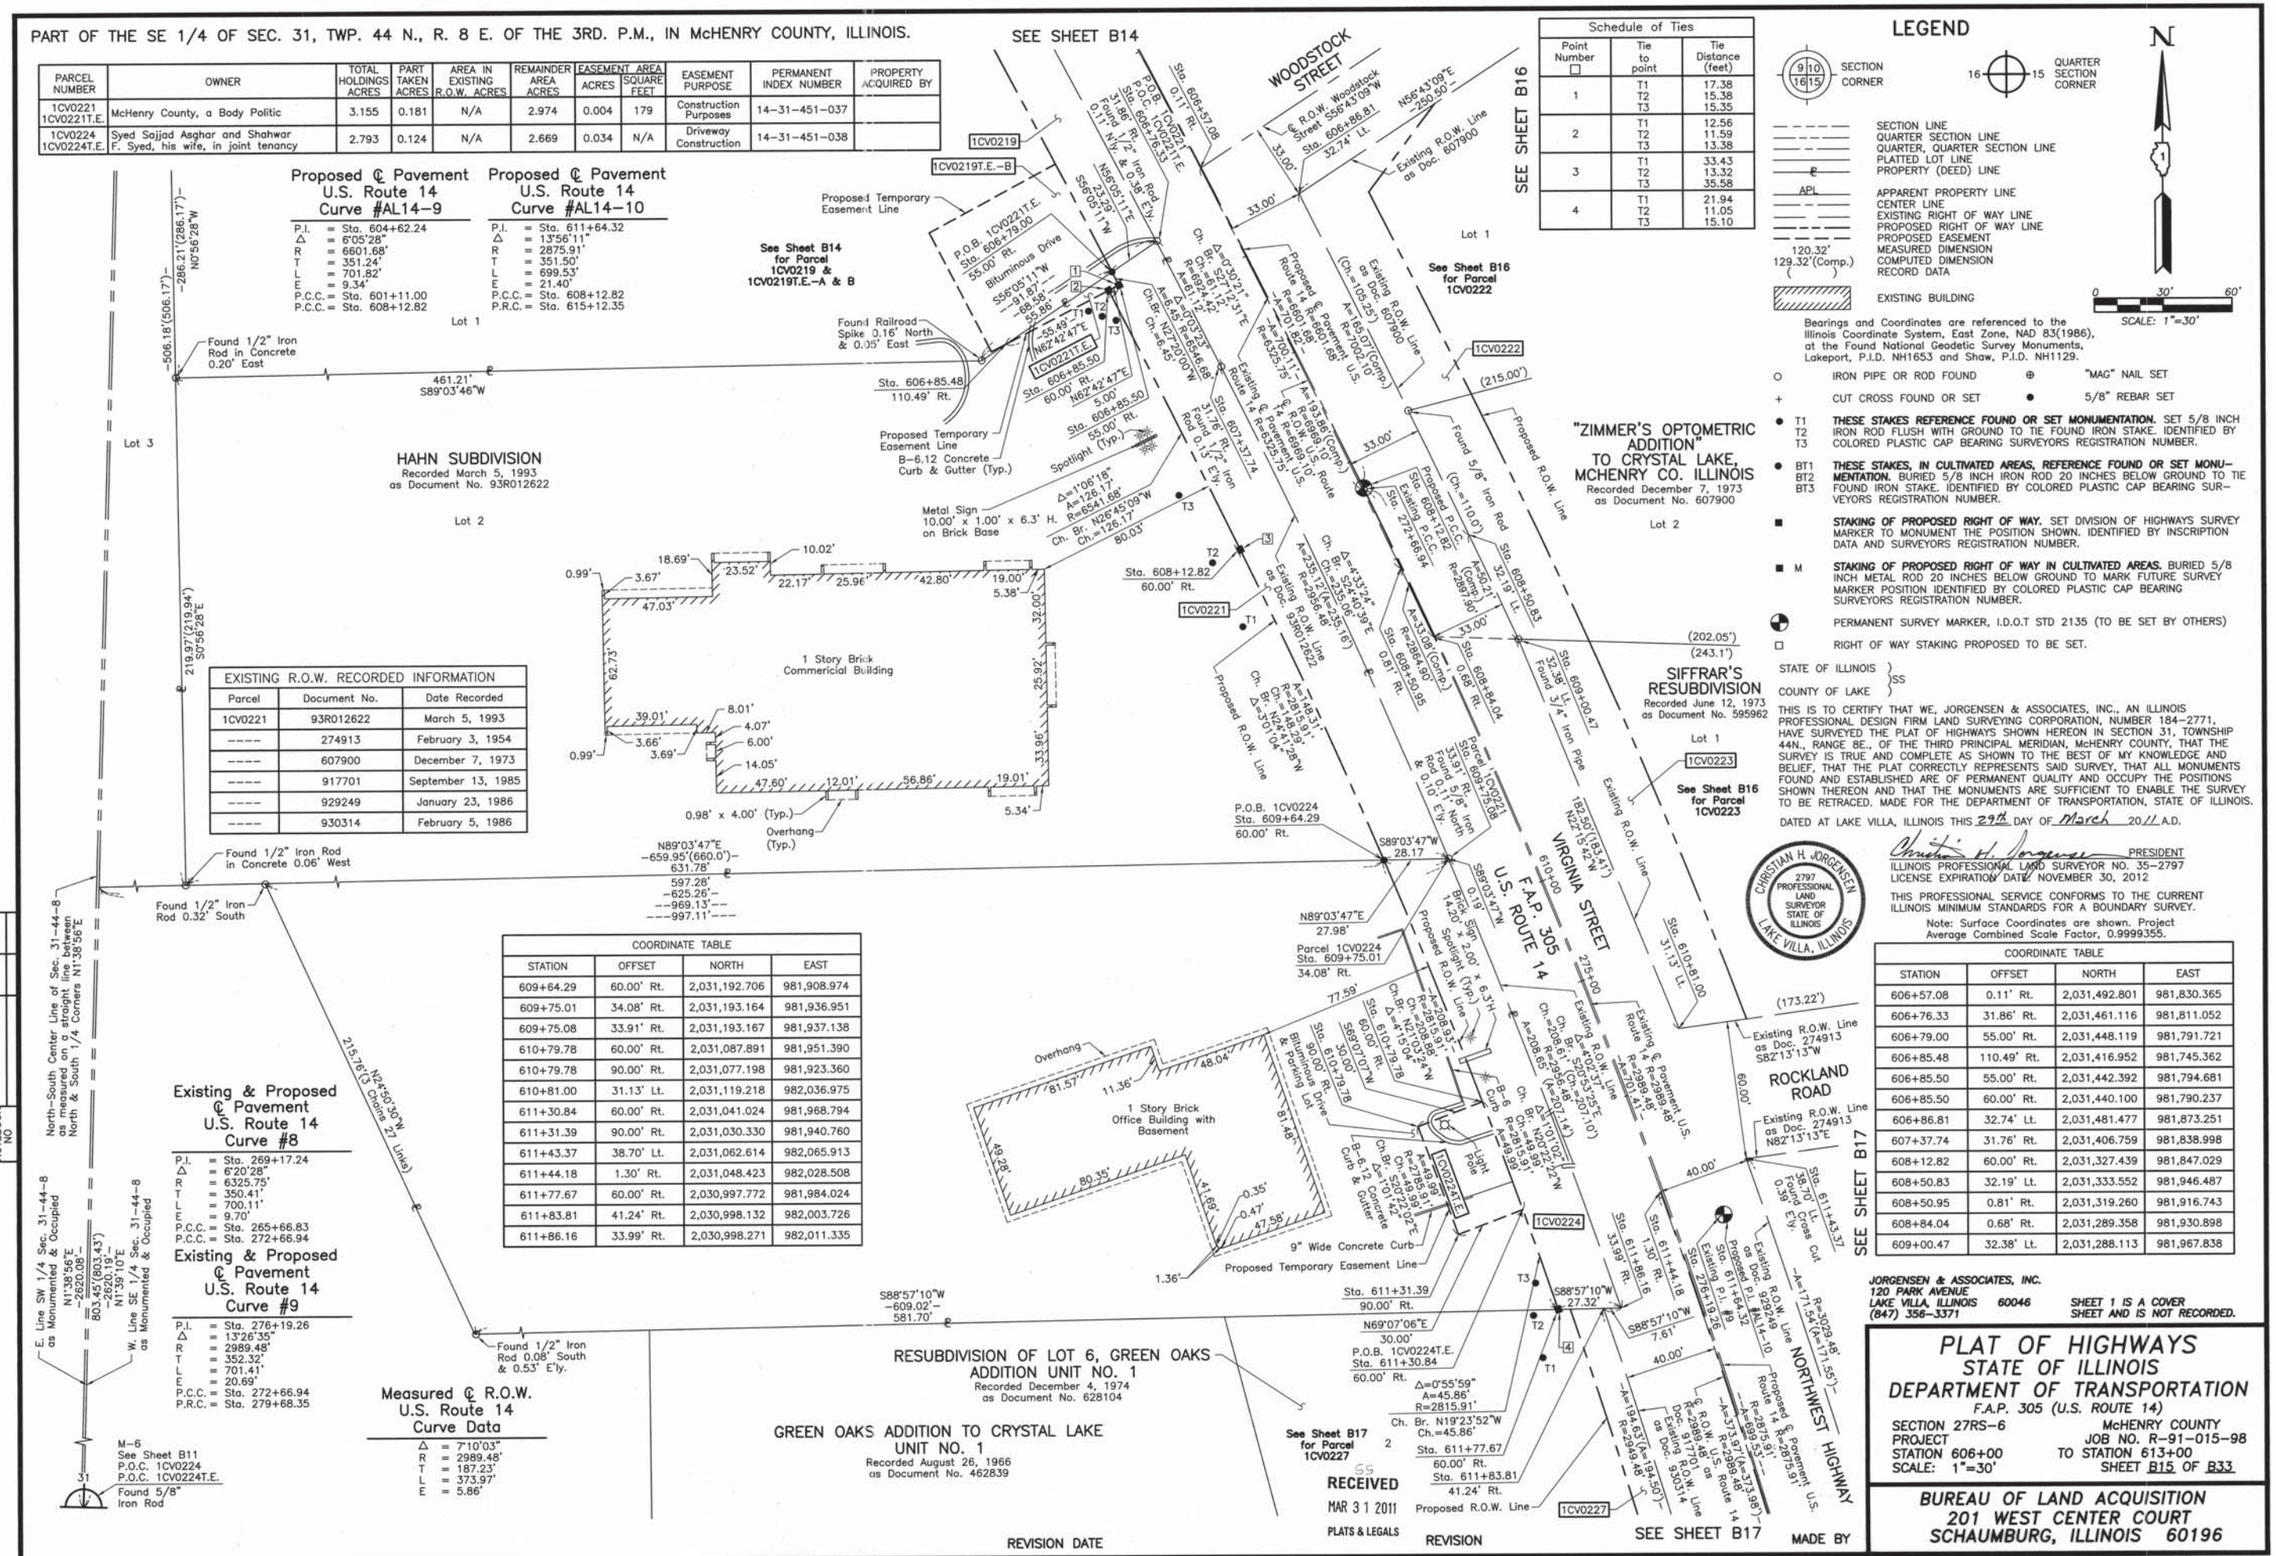

EXISTING R.O.W. RECORDED INFORMATION		
Parcel	Document No.	Date Recorded
1CV0221	93R012622	March 5, 1993
----	274913	February 3, 1954
----	607900	December 7, 1973
----	917701	September 13, 1985
----	929249	January 23, 1986
----	930314	February 5, 1986

COORDINATE TABLE			
STATION	OFFSET	NORTH	EAST
609+64.29	60.00' Rt.	2,031,192.706	981,908.974
609+75.01	34.08' Rt.	2,031,193.164	981,936.951
609+75.08	33.91' Rt.	2,031,193.167	981,937.138
610+79.78	60.00' Rt.	2,031,087.891	981,951.390
610+79.78	90.00' Rt.	2,031,077.198	981,923.360
610+81.00	31.13' Lt.	2,031,119.218	982,036.975
611+30.84	60.00' Rt.	2,031,041.024	981,968.794
611+31.39	90.00' Rt.	2,031,030.330	981,940.760
611+43.37	38.70' Lt.	2,031,062.614	982,065.913
611+44.18	1.30' Rt.	2,031,048.423	982,028.508
611+77.67	60.00' Rt.	2,030,997.772	981,984.024
611+83.81	41.24' Rt.	2,030,998.132	982,003.726
611+86.16	33.99' Rt.	2,030,998.271	982,011.335

Schedule of Ties		
Point Number	Tie to point	Tie Distance (feet)
1	T1 T2 T3	17.38 15.38 15.35
2	T1 T2 T3	12.56 11.59 13.38
3	T1 T2 T3	33.43 13.32 35.58
4	T1 T2 T3	21.94 11.05 15.10

LEGEND

SECTION CORNER

QUARTER SECTION CORNER

SECTION LINE
QUARTER SECTION LINE
QUARTER, QUARTER SECTION LINE
PLATTED LOT LINE
PROPERTY (DEED) LINE
APPARENT PROPERTY LINE
CENTER LINE
EXISTING RIGHT OF WAY LINE
PROPOSED RIGHT OF WAY LINE
PROPOSED EASEMENT
120.32' MEASURED DIMENSION
129.32'(Comp.) COMPUTED DIMENSION
( ) RECORD DATA
EXISTING BUILDING

N

SCALE: 1"=30'

Bearings and Coordinates are referenced to the Illinois Coordinate System, East Zone, NAD 83(1986), at the Found National Geodetic Survey Monuments, Lakeport, P.I.D. NH1653 and Shaw, P.I.D. NH1129.

○ IRON PIPE OR ROD FOUND
⊕ "MAG" NAIL SET
+ CUT CROSS FOUND OR SET
● 5/8" REBAR SET

● T1 T2 T3 **THESE STAKES REFERENCE FOUND OR SET MONUMENTATION.** SET 5/8 INCH IRON ROD FLUSH WITH GROUND TO TIE FOUND IRON STAKE. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER.

● BT1 BT2 BT3 **THESE STAKES, IN CULTIVATED AREAS, REFERENCE FOUND OR SET MONUMENTATION.** BURIED 5/8 INCH IRON ROD 20 INCHES BELOW GROUND TO TIE FOUND IRON STAKE. IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER.

■ **STAKING OF PROPOSED RIGHT OF WAY.** SET DIVISION OF HIGHWAYS SURVEY MARKER TO MONUMENT THE POSITION SHOWN. IDENTIFIED BY INSCRIPTION DATA AND SURVEYORS REGISTRATION NUMBER.

■ M **STAKING OF PROPOSED RIGHT OF WAY IN CULTIVATED AREAS.** BURIED 5/8 INCH METAL ROD 20 INCHES BELOW GROUND TO MARK FUTURE SURVEY MARKER POSITION IDENTIFIED BY COLORED PLASTIC CAP BEARING SURVEYORS REGISTRATION NUMBER.

PERMANENT SURVEY MARKER, I.D.O.T STD 2135 (TO BE SET BY OTHERS)

□ RIGHT OF WAY STAKING PROPOSED TO BE SET.

STATE OF ILLINOIS)
)SS
COUNTY OF LAKE)

THIS IS TO CERTIFY THAT WE, JORGENSEN & ASSOCIATES, INC., AN ILLINOIS PROFESSIONAL DESIGN FIRM LAND SURVEYING CORPORATION, NUMBER 184-2771, HAVE SURVEYED THE PLAT OF HIGHWAYS SHOWN HEREON IN SECTION 31, TOWNSHIP 44N., RANGE 8E., OF THE THIRD PRINCIPAL MERIDIAN, McHENRY COUNTY, THAT THE SURVEY IS TRUE AND COMPLETE AS SHOWN TO THE BEST OF MY KNOWLEDGE AND BELIEF, THAT THE PLAT CORRECTLY REPRESENTS SAID SURVEY, THAT ALL MONUMENTS FOUND AND ESTABLISHED ARE OF PERMANENT QUALITY AND OCCUPY THE POSITIONS SHOWN THEREON AND THAT THE MONUMENTS ARE SUFFICIENT TO ENABLE THE SURVEY TO BE RETRACED. MADE FOR THE DEPARTMENT OF TRANSPORTATION, STATE OF ILLINOIS.

DATED AT LAKE VILLA, ILLINOIS THIS 29th DAY OF March 2011 A.D.

Christian H. Jorgensen PRESIDENT
ILLINOIS PROFESSIONAL LAND SURVEYOR NO. 35-2797
LICENSE EXPIRATION DATE: NOVEMBER 30, 2012

CHRISTIAN H. JORGENSEN 2797 PROFESSIONAL LAND SURVEYOR STATE OF ILLINOIS LAKE VILLA, ILLINOIS

THIS PROFESSIONAL SERVICE CONFORMS TO THE CURRENT ILLINOIS MINIMUM STANDARDS FOR A BOUNDARY SURVEY.

Note: Surface Coordinates are shown. Project Average Combined Scale Factor, 0.9999355.

COORDINATE TABLE			
STATION	OFFSET	NORTH	EAST
606+57.08	0.11' Rt.	2,031,492.801	981,830.365
606+76.33	31.86' Rt.	2,031,461.116	981,811.052
606+79.00	55.00' Rt.	2,031,448.119	981,791.721
606+85.48	110.49' Rt.	2,031,416.952	981,745.362
606+85.50	55.00' Rt.	2,031,442.392	981,794.681
606+85.50	60.00' Rt.	2,031,440.100	981,790.237
606+86.81	32.74' Lt.	2,031,481.477	981,873.251
607+37.74	31.76' Rt.	2,031,406.759	981,838.998
608+12.82	60.00' Rt.	2,031,327.439	981,847.029
608+50.83	32.19' Lt.	2,031,333.552	981,946.487
608+50.95	0.81' Rt.	2,031,319.260	981,916.743
608+84.04	0.68' Rt.	2,031,289.358	981,930.898
609+00.47	32.38' Lt.	2,031,288.113	981,967.838

JORGENSEN & ASSOCIATES, INC.
120 PARK AVENUE
LAKE VILLA, ILLINOIS 60046
(847) 356-3371

SHEET 1 IS A COVER SHEET AND IS NOT RECORDED.

PLAT OF HIGHWAYS
STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
F.A.P. 305 (U.S. ROUTE 14)

SECTION 27RS-6
PROJECT
STATION 606+00
SCALE: 1"=30'

McHENRY COUNTY
JOB NO. R-91-015-98
TO STATION 613+00
SHEET B15 OF B33

BUREAU OF LAND ACQUISITION
201 WEST CENTER COURT
SCHAUMBURG, ILLINOIS 60196

ROW PLAT	BY	DATE
MADE		
CHECKED		
INKED		
NOTEBOOK NO		

RECEIVED MAR 31 2011 PLATS & LEGALS

REVISION DATE REVISION MADE BY