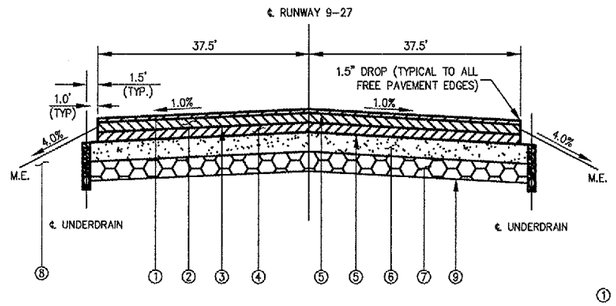

TYPICAL SECTION - RUNWAY 9-27

EXCEPT STA. 47+11.79 THRU STA. 48+00

(SECTION SHOWN LOOKING WEST)

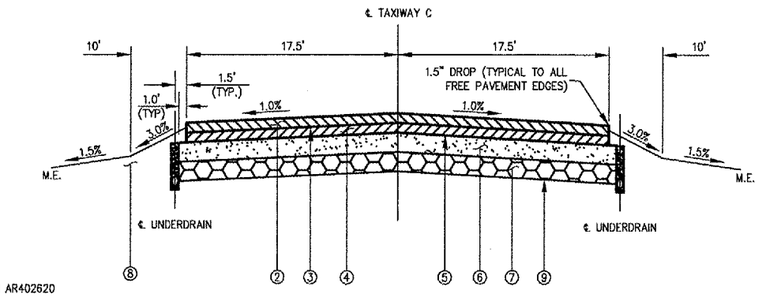

TYPICAL SECTION - TAXIWAY C
ADDITIVE ALTERNATE NO. 1

EXCEPT STA. 415+82.50 THRU STA. 416+75.00
AND STA. 419+05.00 THRU STA. 419+62.50

(SECTION SHOWN LOOKING NORTH)

① PROPOSED 5/8 INCH POROUS FRICTION COURSE, ITEM AR402620
② PROPOSED 2 INCH BITUMINOUS SURFACE COURSE, ITEM AR401611
③ PROPOSED BITUMINOUS TACK COAT, ITEM AR603510
④ PROPOSED 2 INCH BITUMINOUS BASE COURSE, ITEM AR201611
⑤ PROPOSED BITUMINOUS PRIME COAT, ITEM AR602510
⑥ PROPOSED 12 INCH CRUSHED AGGREGATE BASE COURSE, ITEM AR209612
⑦ PROPOSED 8 INCH GRANULAR DRAINAGE SUBBASE, ITEM AR800971
⑧ PROPOSED 4 INCH TOPSOIL, ITEM AR905510
⑨ PROPOSED SEPARATION FABRIC, ITEM AR156513

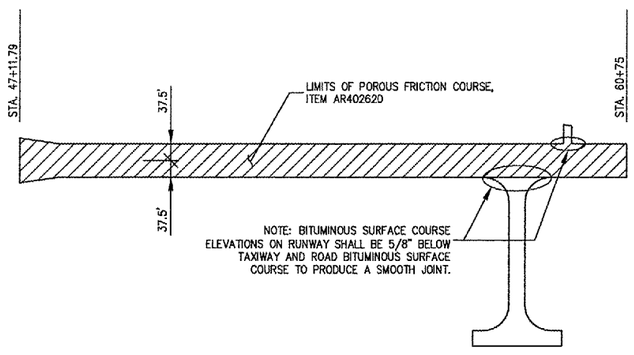

LIMITS OF POROUS FRICTION COURSE

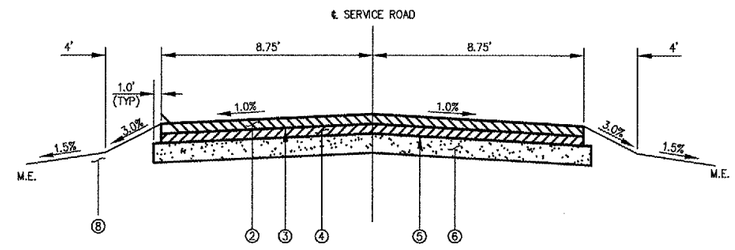

TYPICAL SECTION - SERVICE ROAD

(SECTION SHOWN LOOKING NORTH)



NOTE:
ALL JOINT SEALING TO BE PAID UNDER SAW AND SEAL BITUMINOUS JOINTS, ITEM AR401660.

BITUMINOUS/BITUMINOUS SEAL

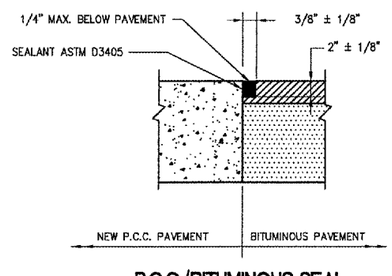

P.C.C./BITUMINOUS SEAL

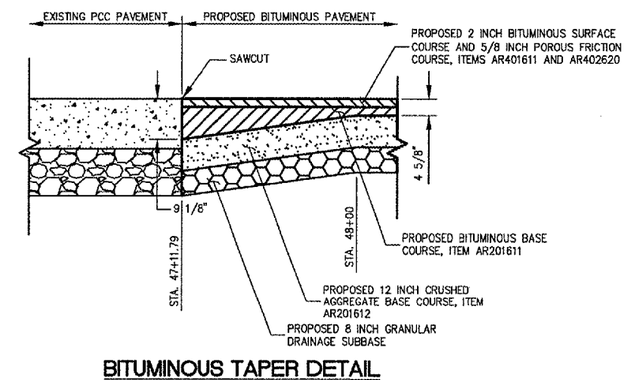

BITUMINOUS TAPER DETAIL

LE038

HANSON

HANSON PROFESSIONAL SERVICES INC.

815 Commerce Drive, Suite 200
Oak Brook, Illinois 60523
Telephone: 630.990.3800
Fax: 630.990.3801

Illinois Professional Design Firm
Registration No. 184-001084

© Copyright Hanson Professional Service Inc. 2007

Chicago-Romeoville Airport

JOLIET REGIONAL PORT DISTRICT

1 George Michas Drive
Romeoville, Illinois 60446
Telephone: 815.838.9497
Fax: 815.838.9524

REMOVE AND REPLACE PORTIONS OF RUNWAY 9-27 AND TAXIWAY C

AIP PROJECT NO. 3-17-0140-B41
IDA PROJECT NO. LOT-3709

No.	Drawing Issue Description	Date	By

Date
JUNE 18, 2007

Sheet Title
TYPICAL PAVEMENT SECTIONS

840-07B8053
Project Number

LDH 05/31/07
Layout By Date

LDH 05/31/07
Designed By Date

RMH 06/18/07
Reviewed By Date

LDH ---- ----
Drawn By

Sheet No.
5

I:\07JOBS\08940\07B8053\DRAWINGS\SHEETS\05-TYPICAL SECTIONS.DWG JUN 19, 2007 4:36PM BLB