

CALENDAR OF CONSTRUCTION WORK


| PHASE | YEAR | WORK DATES | | CONSTRUCTION WORK |
|----------|------|--------------|-------------|--|
| | | FROM | TO | |
| PHASE I | 2009 | MARCH 1 | JUNE 1 | CONSTRUCTION OF CORNER GARDENS AT THE NW AND SW QUADRANTS. EXCAVATION AND PLACEMENT OF POROUS GRANULAR MATERIAL, PLANTING MIX, GEOTECHNICAL FABRIC, AND MULCH (ALL CORNER GARDENS). INSTALLATION OF WATER SERVICE AND IRRIGATION SYSTEMS FOR ALL GATEWAYS AND CORNER GARDENS. |
| | | MARCH 1 | JUNE 1 | INSTALLATION OF ALL WOODY PLANTS. WOODY PLANTS MUST BE CONTAINER OR DUG WHILE DORMANT AND MAINTAINED PROPERLY UNTIL PLANTED. ALL WOODY PLANTS MUST BE INSTALLED PRIOR TO PERENNIALS. |
| | | MARCH 1 | JUNE 1 | INSTALL PERENNIAL PLANTS AFTER ALL WOODY PLANTS HAVE BEEN INSTALLED. |
| | | JUNE 1 | | INTERIM COMPLETION DATE |
| PHASE I | 2009 | JUNE 1 | | CERTIFICATION TO THE BUREAU OF MAINTENANCE THAT ALL PLANTS HAVE BEEN INSTALLED AND ARE IN A LIVE HEALTHY CONDITION AND ELIGIBLE FOR A SEPTEMBER PERIOD OF ESTABLISHMENT INSPECTION. |
| PHASE | YEAR | WORK DATES | | CONSTRUCTION WORK |
| | | FROM | TO | |
| PHASE II | 2009 | JUNE 1, 2009 | MAY 1, 2010 | PROVIDE PLANT CARE REQUIRED FOR ALL PLANTS (WEEDING, WATERING, OR OTHER WORK WHICH IS NECESSARY TO MAINTAIN HEALTH AND SATISFACTORY APPEARANCE OF THE GATEWAY AND CORNER GARDENS) DURING THE PERIOD OF ESTABLISHMENT AND ACCORDING TO THE LANDSCAPE MAINTENANCE SPECIAL PROVISION. |
| | | SEPT. 1 | SEPT. 30 | PERIOD OF ESTABLISHMENT INSPECTION. |
| | | OCT. 1 | OCT. 31 | INSTALL BULBS. |
| | | OCT. 1 | OCT. 31 | FALL SHUT DOWN. |
| | | APRIL 1 | MAY 1 | SPRING START UP. |
| PHASE II | 2010 | MAY 1 | | COMPLETION DATE |
| | 2010 | MAY 17 | | FINAL INSPECTION DATE |

CONTRACTOR ACCESS ASSUMPTIONS

FOR THE SE AND SW QUADRANTS ACCESS IS ASSUMED TO BE FROM THE FRONTAGE ROAD. ACCESS FROM THE EXPRESSWAY IS BLOCKED BY EXISTING BARRIER WALLS. THE EXISTING FENCE IS SHOWN TO BE REMOVED AND RE-ERECTED. THE CONTRACTOR SHALL MAINTAIN ACCESS CONTROL BY INSTALLING TEMPORARY CHAIN LINK FENCE (PORTABLE) WHILE EXISTING FENCE IS REMOVED. TEMPORARY FENCE (PORTABLE) IS INCLUDED IN THE COST OF TRAFFIC CONTROL AND PROTECTION (SPECIAL).

FOR THE NE AND NW QUADRANTS ACCESS IS ASSUMED TO BE FROM THE THE EXPRESSWAY. ACCESS FROM THE FRONTAGE ROAD IS BLOCKED BY EXISTING RETAINING WALLS. TEMPORARY EXPRESSWAY SHOULDER CLOSURES SHALL BE PERMITTED.

QUADRANT NOMENCLATURE

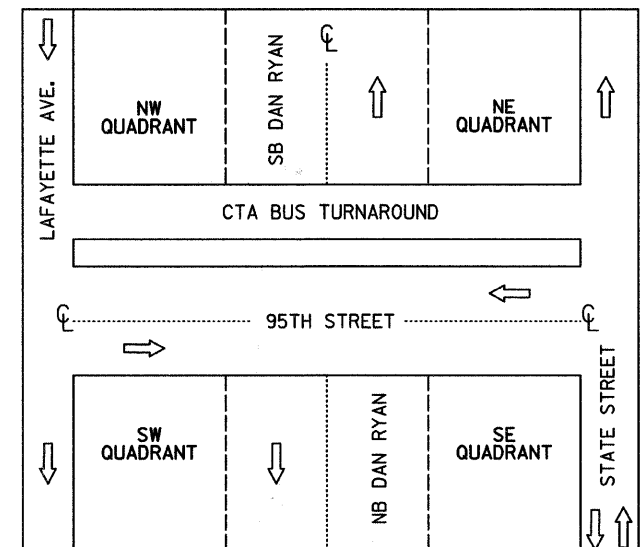

IDOT HOT-MIX ASPHALT MIXTURE REQUIREMENTS

| ITEM | AC TYPE | AIR VOIDS |
|---|----------------|-----------|
| PAVEMENT REMOVAL AND REPLACEMENT | | |
| HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 1 1/2" | PG 64-22 | 4%@70Gyr |
| LEVELING BINDER (MACHINE METHOD), N70, 1 1/2" | PG 64-22/58-22 | 4%@70Gyr |

THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112/SQ YD/IN. USE 135 LB/SQ YD/IN. IF USING A SMA MIX.

WHEN RAP EXCEEDS 20%, THE NEW ASPHALT BINDER IN THE MIX SHALL BE PG 58-22.

| REVISIONS | |
|-----------|------|
| NAME | DATE |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

ILLINOIS DEPARTMENT OF TRANSPORTATION
 F.A.I. 94 (DAN RYAN EXPRESSWAY)
 CALENDAR OF CONSTRUCTION, QUADRANT
 NOMENCLATURE, HOT-MIX ASPHALT MIXTURE
 REQUIREMENTS, AND ACCESS SUMMARY

SCALE: NONE DRAWN BY: JDF
 DATE: JUNE 20, 2008 CHECKED BY: JPM

12/08/08 12:00:00 PM